



2024



COMMERCIAL LIGHTS



OKELI LIGHTING

2024 COMMERCIAL LIGHTS

COST-EFFECTIVE

中山市奥克莱灯饰有限公司
OKELI LIGHTING CO.,LTD

Factory Address
No. 36 ChangAn North Road, Henglan Town,
Zhongshan City, Guangdong, China

Website
www.okelilamp.com

Mailbox
okeli@neworb.cn

Service Hotline
0086-760-22538361



About us

OKELI Lighting Co.,Ltd., established in 2010, is one of the large lighting enterprises, integrated with design, research, manufacturing and marketing, and our products range cover both residential and commercial lighting field.

Our manufacturing plant covers an area over 30000 m2, with the completed manufacturing chain from raw material to finished product, and we are capable to provide big producing capacity; We are strictly following ISO9001 management system, and all our products are made according to CE, VDE etc. quality standard. We've built up international top standard laboratory to assure technical study and innovation, and our global design team with strong technical capacity and rich experience are capable to fulfill both OEM and ODM requirement from our customers, and we've kept gaining many patents and intellectual property rights.

With continuously growing, our products are mostly appreciated by global buyers, and "OKELI" brand has been expanded rapidly all over the world.

INDEX TECHNICAL RANGE

01 LED DOWN LIGHTS 04-19



02 LED SPOT LIGHTS 20-29



02 LED SPOT LIGHTS 20-29




03 LED SURFACE DOWN LIGHT 30-39



04 LED TRACK LIGHT 40-45



05 LED PANEL LIGHT 46-55

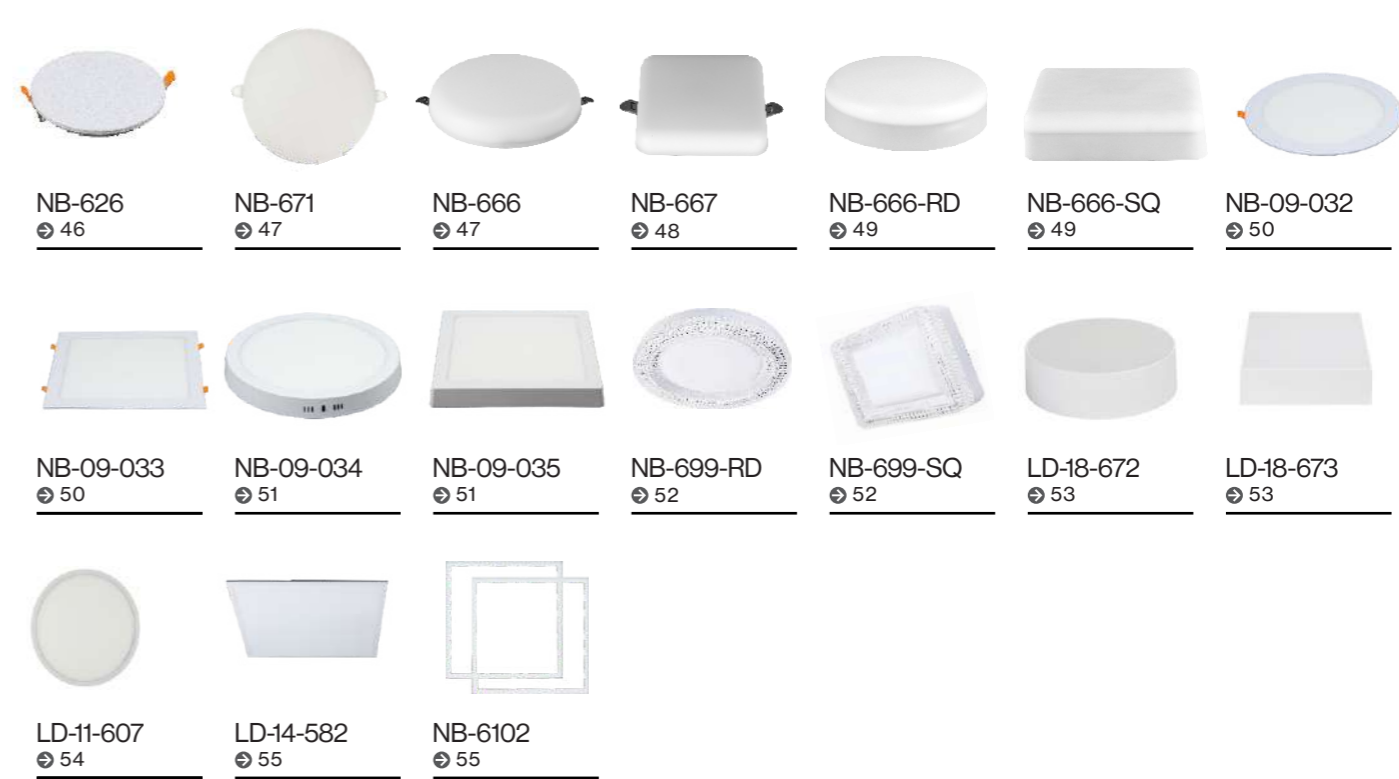

06 LED LINEAR LIGHT 56-58



NB-743
↻ 56

NB-710
↻ 57

NB-712
↻ 58

NB-783
↻ 58

DOWNLIGHTS





NB-254

Wattage: 7W/10W
Lumens: 85-90LM/W
Chip: SANAN SMD
CCT: 3000K/4000K/6000K(Single color)
Input Power: AC85-265V
Material: Die casting Aluminum+PC ring
Housing colour : WHITE(WH) BLACK(BK)
Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)



Professional Optical
Accessories

18°/24°/36°

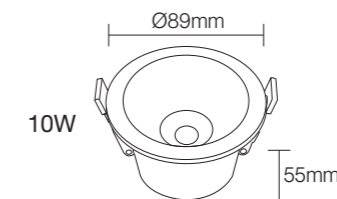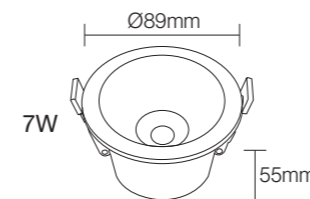



CE CB BIS 

NB-255

Wattage: 7W/10W
 Lumens: 85-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V
 Material: Die casting Aluminum+PC ring
 Housing colour : WHITE(WH)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical Accessories

18°/24°/36°

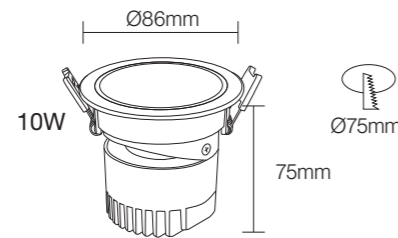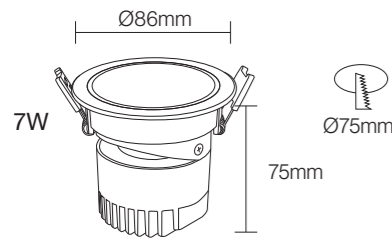

CE CB BIS





NB-287-A

Wattage: 12W/18W
 Lumens: 90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

18°/24°/36°

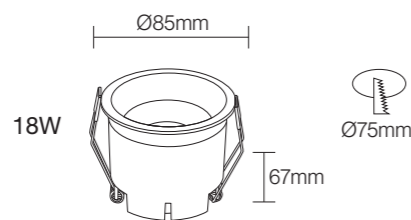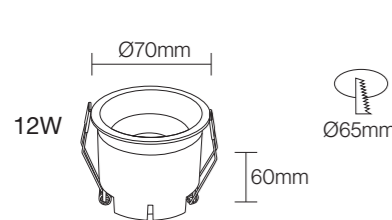

CE CB BIS





NB-287-B

Wattage: 12W/18W
 Lumens: 90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

18°/24°/36°

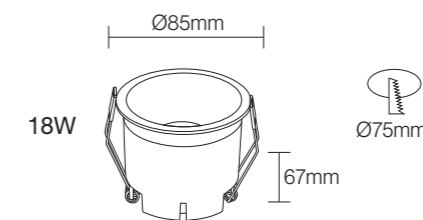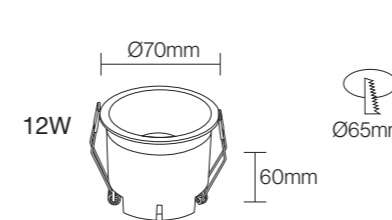


CE CB BIS



NB-287-C

Wattage: 12W/18W
 Lumens: 90LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories **18°/24°/36°**

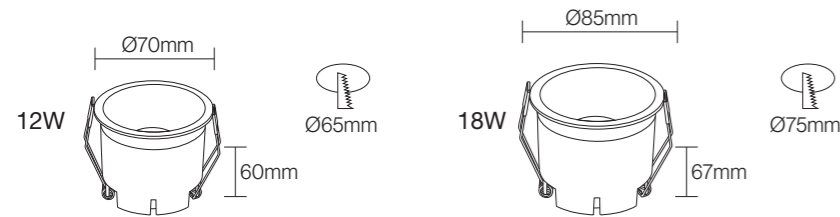


CE CB BIS



NB-787-E

Wattage: 12W/18W
 Lumens: 90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories **55°**

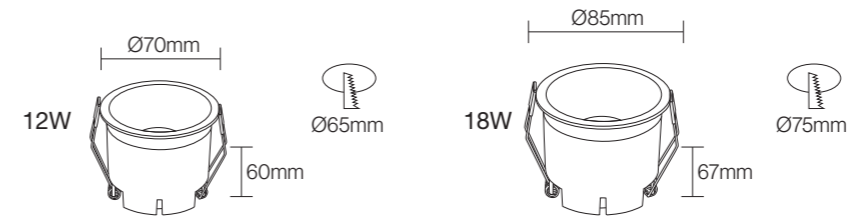


CE CB BIS



NB-287-D

Wattage: 12W/18W
 Lumens: 90LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories **18°/24°/36°**

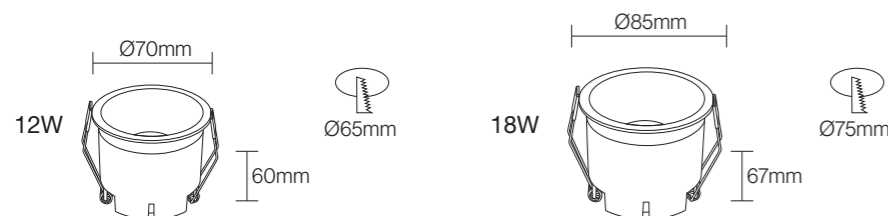


CE CB BIS



NB-787-F

Wattage: 7W/12W
 Lumens: 90LM/W
 Chip: Bridgelux COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories **68.5°**

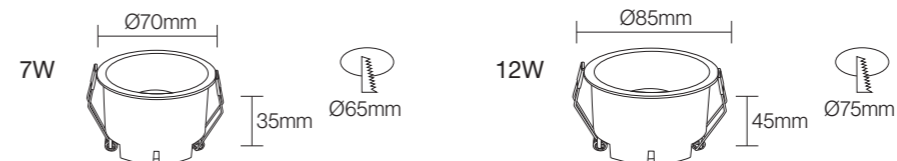

CE CB BIS






NB-792

Wattage: 12W
 Lumens: 90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 CHROME(CH)

Professional Optical
Accessories

24°/36°

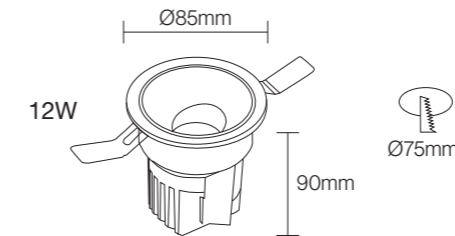


CE CB BIS

NB-2108

Wattage: 12W/18W/24W
 Lumens: 80LM/W
 Chip: Bridgelux COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical
Accessories

18°/24°/36°

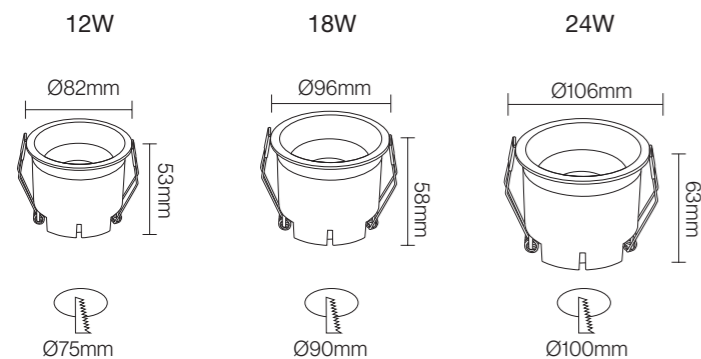


CE CB BIS

NB-233

Wattage: 7W/12W/20W/30W
 Lumens: 80-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical
Accessories

15°/24°/36°

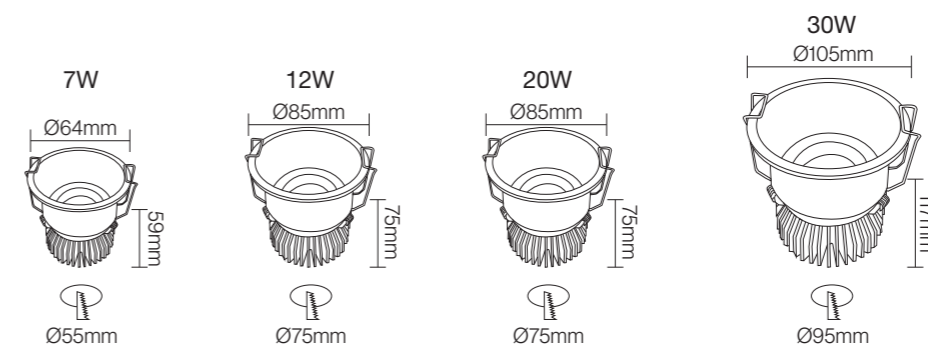


CE CB BIS

NB-396

Wattage: 5W/7W/12W/5+5W/7+7W/12+12W
 Lumens: 65-85LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color) /3IN1
 Input Power: AC85-265V
 Material: Die casting Aluminum+PC ring
 Housing colour : white/black+Gold/Chrome/
 Gun black/white/black reflector

Profesional Optical
Accessories

15°/24°/36°/60°

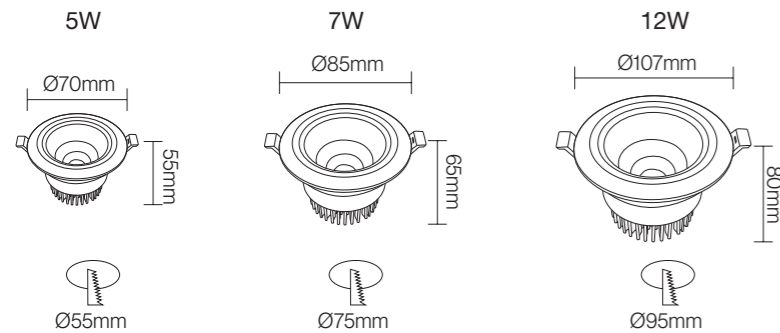

CE CB BIS




NB-213

Wattage: 7W/12W/18W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC170-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Profesional Optical
Accessories

24°/38°

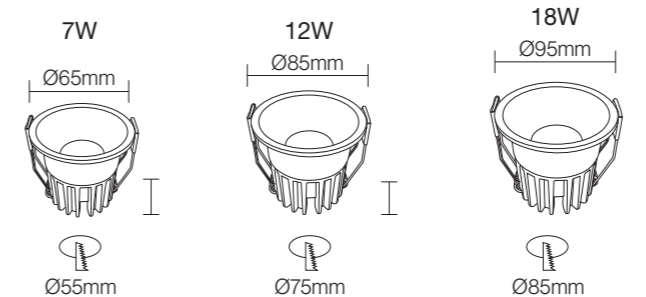

CE CB BIS




NB-211

Wattage: 7W/10W
 Lumens: 85-90LM/W
 CCT: -20°C—+40°C
 Life span: 50000H
 Material: Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Profesional Optical
Accessories

24°/38°

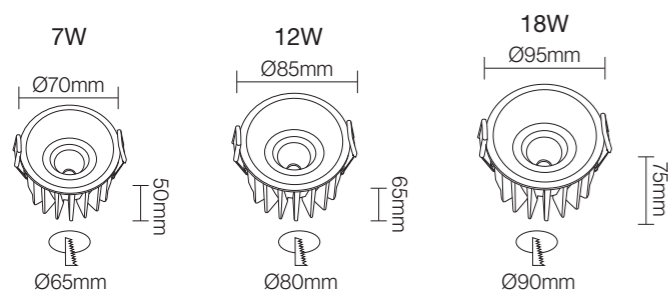

CE CB BIS




NB215-B

Wattage: 7W/12W/18W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC170-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Profesional Optical
Accessories

36°

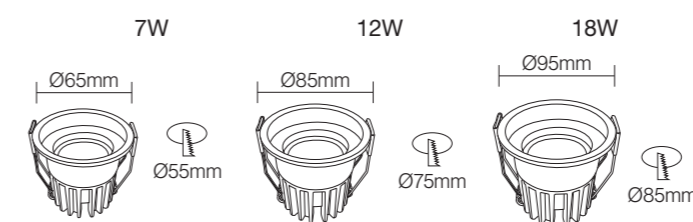

CE CB BIS




NB215-C

Wattage: 7W/12W/18W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC170-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical
Accessories

36°

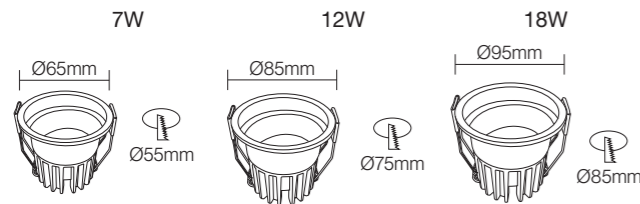

CE CB BIS




NB215-D

Wattage: 7W/12W/18W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC170-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical
Accessories

36°

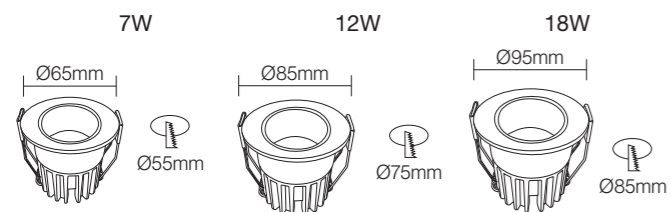

CE CB BIS




NB-214

Wattage: 7W/12W/18W
 Lumens: 90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC170-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical
Accessories

24°/38°

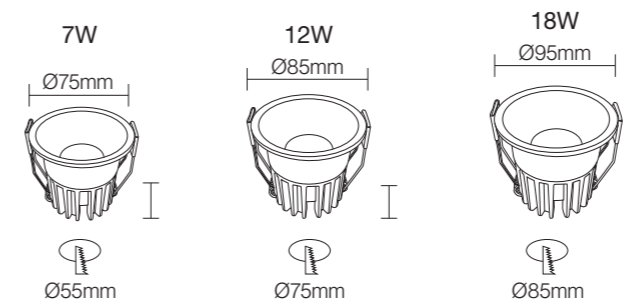

CE CB BIS




NB-238

Wattage: 7W/12W/18W
 Lumens: 80-90LM/W
 Chip: Bridgelux COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC170-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical Accessories

15°/24°/36°

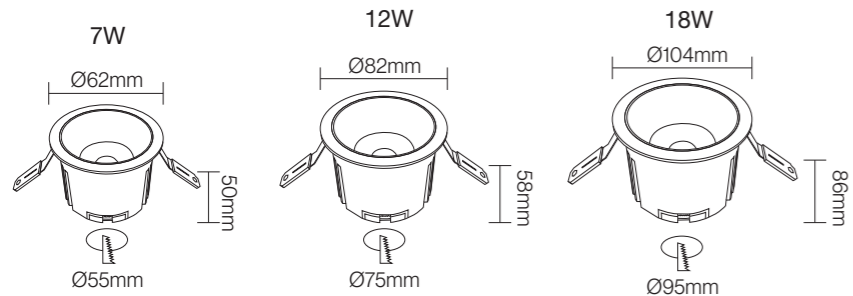


CE CB BIS



NB230-RD

Wattage: 10W/20W/30W/2*10W/2*20W
 Lumens: 80-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH)
 Inner rings color: BLACK(BK)
 Professional Optical Accessories

15°/24°

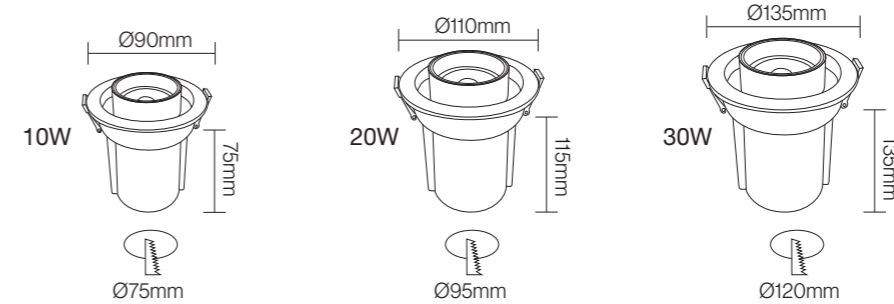

CE CB BIS




NB-256

Wattage: 12W/2*12W/18W/2*18W
 Lumens: 90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

15°/24°/36°/50°

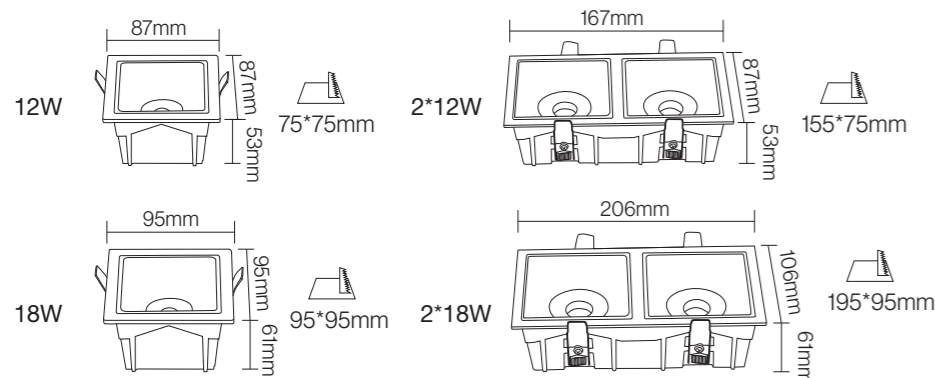


NB230-SQ

Wattage: 10W/20W/2*10W/2*20W
 Lumens: 80-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH)
 Inner rings color: BLACK(BK)

Professional Optical Accessories

15°/24°

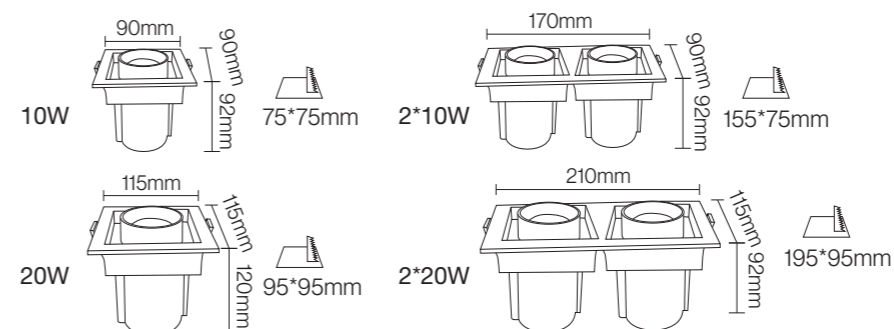

CE CB BIS




NB-229

Wattage: 7W/12W/18W
 Lumens: 80-90LM/W
 Chip: SANANCOB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

24°

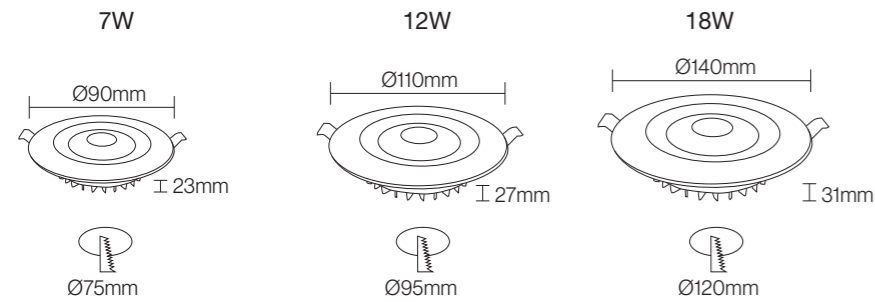

CE CB BIS




NB-209

Wattage: 7W/12W
 Lumens: 80LM/W
 Chip: Bridgelux COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH)
 Inner rings color: WHITE(WH) GREY

Professional Optical Accessories

24°/38°

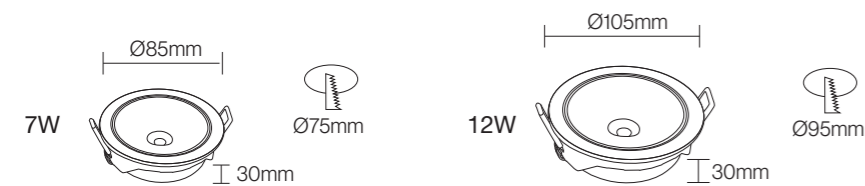

CE CB BIS




NB-786

Wattage: 5W/7W/9W/12W/15W/18W/24W/30W
 Lumens: 80LM/W
 Chip: SANANCOB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK GUN BLACK
 CHROME GOLD(GD) GOLD


Professional Optical Accessories

120°

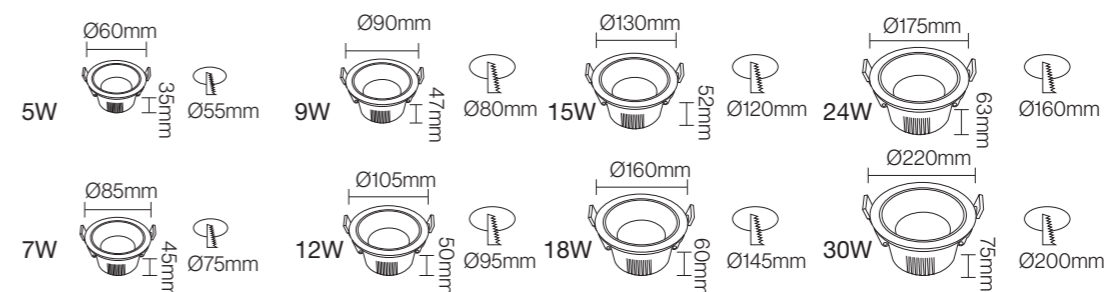

NB-785

Wattage: 5W/9W/12W
 Lumens: 60-80LM/W
 Chip: SANANCOB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories **120°**

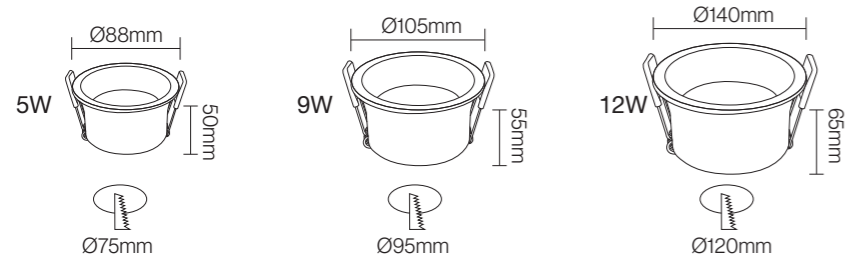


CE CB BIS



NB-215-RD

Wattage: 12W/18W/24W
 Lumens: 90LM/W
 Chip: SANAN SMD2835
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH)
 Professional Optical Accessories **120°**

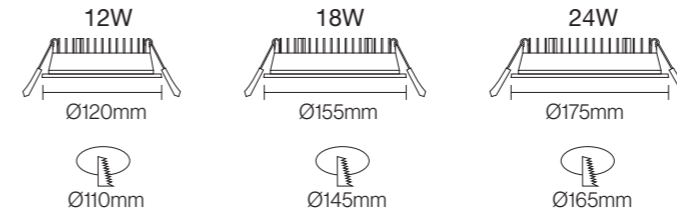


CE CB BIS



NB-216

Wattage: 7W/18W/24W
 Lumens: 700LM/1800lm/2400lm
 Chip: SANAN
 Input Power: AC85-265V Isolated driver
 Surage against: 2.5KV No flicker
 Life span: 50000H
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories **120°**

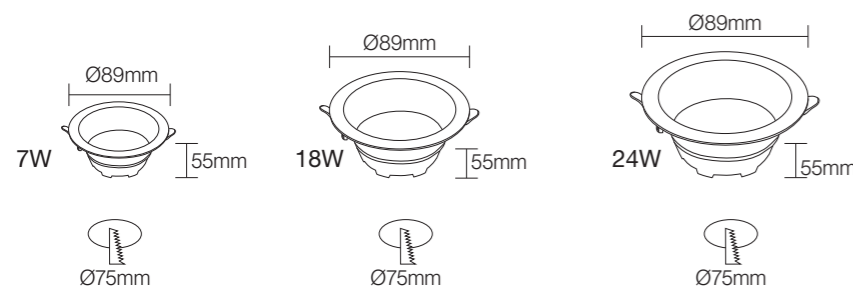


CE CB BIS



NB-215-SQ

Wattage: 12W/18W/24W
 Lumens: 90LM/W
 Chip: SANAN SMD2835
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH)
 Professional Optical Accessories **120°**

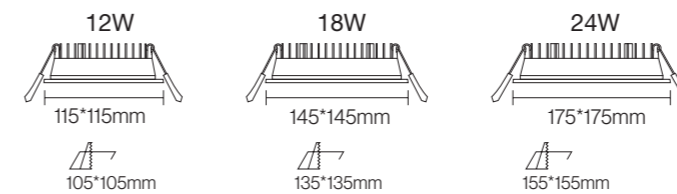


CE CB BIS



NB-2105

Wattage: 5W/7W/9W/18W/24W/36W
 Lumens: 55/60/70/70/75/75/80 LM/W
 Chip: SANAN SMD
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum+PC ring
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories **120°**

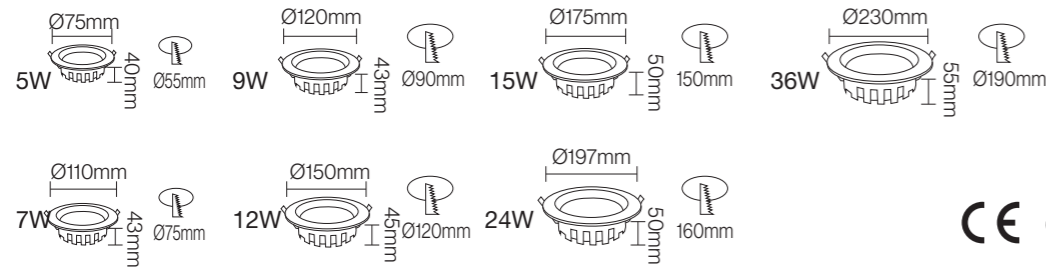


CE CB BIS



NB2117

Wattage: 7W/12W/18W
 Lumens: 80LM/W
 Chip: SANAN COB
 Input Power: AC150-265V Isolated driver
 Material: Aluminum
 Housing colour : white/black+Gold/Chrome/
 Gun black/white/black reflector
 Professional Optical Accessories **36°**

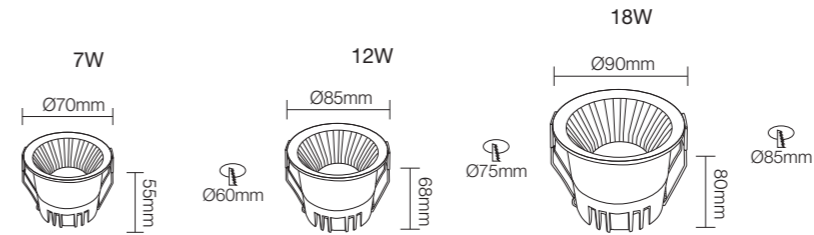


CE CB BIS



NB-2106

Wattage: 5W/12W/18W/24W
 Lumens: 55/60/70/80 LM/W
 Chip: SANAN SMD
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum+PC ring
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK GUN BLACK
 CHROME GOLD(GD) GOLD
 Professional Optical Accessories **120°**

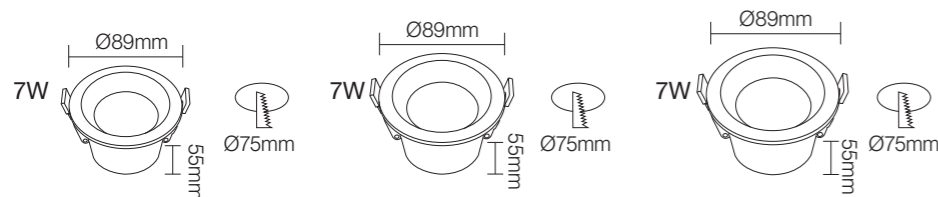


CE CB BIS



NB2118

Wattage: 12W/18W/24W
 Lumens: 90LM/W
 Chip: SANAN SMD2835
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : white/black+Gold/Chrome/
 Gun black/white/black reflector
 Professional Optical Accessories **60°**

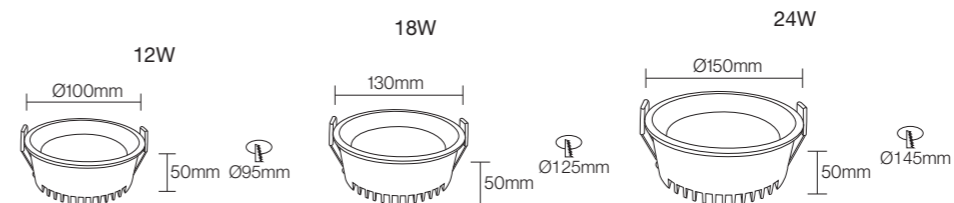

CE CB BIS




NB-7110

Wattage: 10W/15W
 Lumens: 80LM/W
 Chip: Bridgelux COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical
Accessories

36°

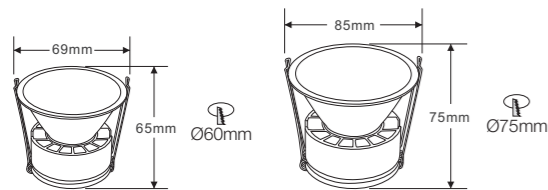

CE CB BIS




LED SPOT LIGHT



NB-791

Wattage: 9W
 Lumens: 90LM/W
 Chip: SANANCOB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical
Accessories

24°/36°

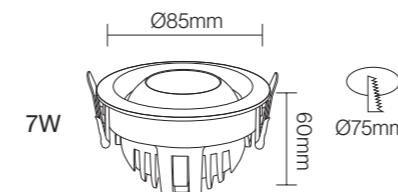

CE CB BIS




NB-257

Wattage: 1*8W/2*8W/3*8W
 Lumens: 90LM/W
 Chip: SANAN SMD
 CCT: 3000K/4000K/6000K(Single color)
 Material: Die casting Aluminum
 Input Power: AC85-265V Isolated driver
 PF: 0.5 1.5KV Surage against
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

15°/24°/36°/60°

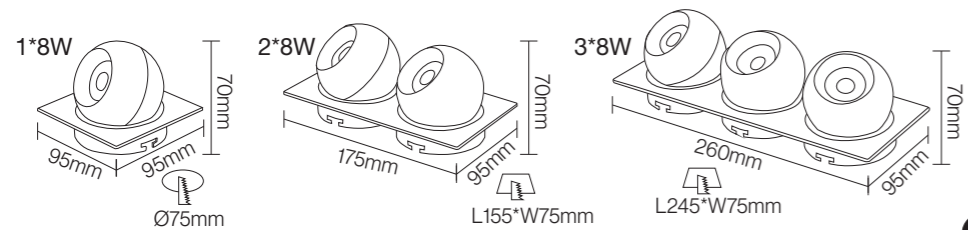

CE CB BIS




NB-794

Wattage: 5W
 Lumens: 65LM/W
 Chip: CREE COB
 CCT: 3000K/4000K/6000K(Single color)
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical
Accessories

12°/24°/36°/60°

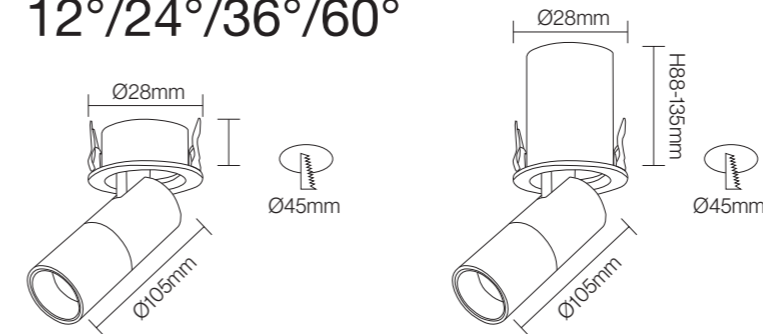

CE CB BIS



NB-262

Wattage: 8W
 Lumens: 80LM/W
 Chip: CREE COB
 CCT: 3000K/4000K/6000K(Single color)
 Material: Die casting Aluminum
 Housing colour : White/Black

Professional Optical
Accessories

12°/24°/36°/60°



CE CB BIS




NB-395

Wattage: 8W
 Lumens: 80LM/W
 Chip: CREE COB
 CCT: 3000K/4000K/6000K(Single color)
 Material: Die casting Aluminum
 Housing colour : White/Black

Professional Optical
Accessories

12°/24°/36°/60°

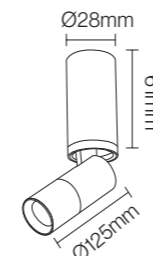

CE CB BIS






NB-268

Wattage: 3W/5W
 Lumens: 45LM/W
 Chip: CREE COB
 CCT: 3000K/4000K/6000K(Single color)
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 CHROME(CH)



Professional Optical
 Accessories
24°

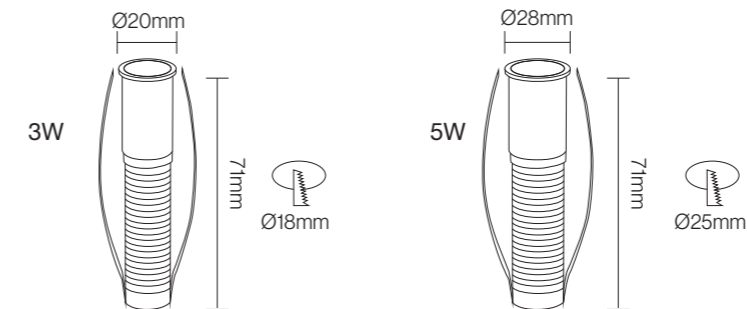

CE CB BIS 


NB-247

Wattage: 12W/18W
 Lumens: 90LM/W
 Operating temperature: -20°C—+40°C
 Life span: 50000H
 Material: Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 CHROME(CH) GOLD(GD)
 ROSE GOLD



Professional Optical
 Accessories

15°/24°/36°/60°

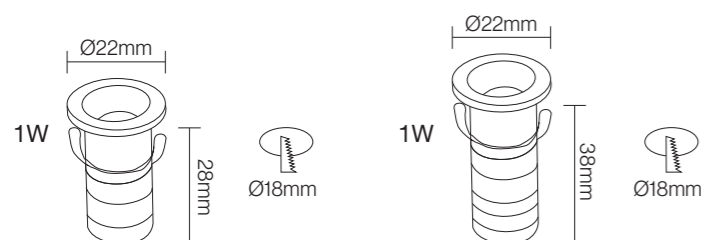

CE CB BIS 


NB-269

Wattage: 3W/5W/7W
 Lumens: 45LM/W
 Chip: CREE COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 CHROME(CH)



Professional Optical
 Accessories

24°

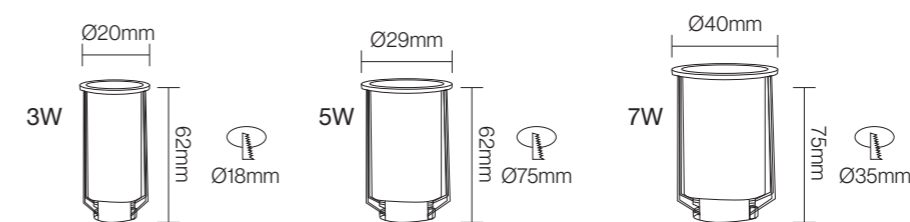

CE CB BIS 

NB-217

Wattage: 1W/3W
 Lumens: 40LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K/RD
 /GR/BL/PK(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
 Accessories

60°




CE CB BIS



NB-202

Wattage: 1W/3W/5W
 Lumens: 45LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC220-240V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

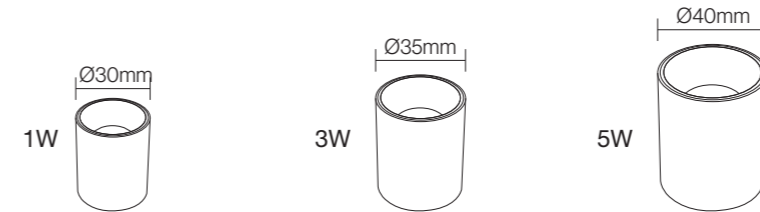

CE CB BIS




NB-218

Wattage: 1W/3W
 Lumens: 40LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K/RD
 /GR/BL/PK(Single color)
 Input Power: AC85-265V Isolated driver
 Surage against: 1.2KV
 Material: Die casting Aluminum
 Housing colour : White/Black+gold

Professional Optical
 Accessories

60°

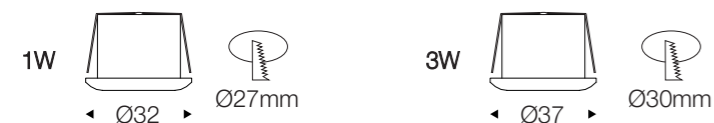

CE CB BIS




NB-219

Wattage: 1W/3W
 Lumens: 40LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K/RD
 /GR/BL/PK(Single color)
 Input Power: AC85-265V Isolated driver
 Surage against: 1.2KV
 Material: Die casting Aluminum
 Housing colour : White/Black+gold

Professional Optical
 Accessories

60°

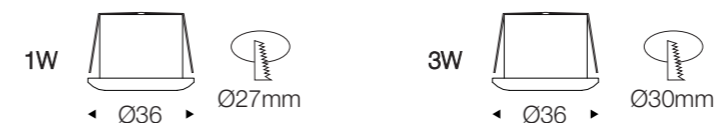

CE CB BIS




NB-220

Wattage: 1W/3W
 Lumens: 40LW/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K/RD
 /GR/BL/PK(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

60°

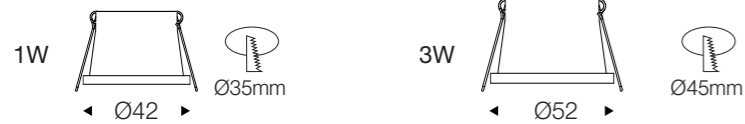

CE CB BIS



NB-223

Wattage: 3W
 Lumens: 40LW/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Material: Die casting Aluminum
 Housing colour : White/Black

Professional Optical
Accessories

60°



CE CB BIS




NB-221

Wattage: 1W/3W
 Lumens: 40LW/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K/RD
 /GR/BL/PK(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 GLOD

Professional Optical
Accessories

60°

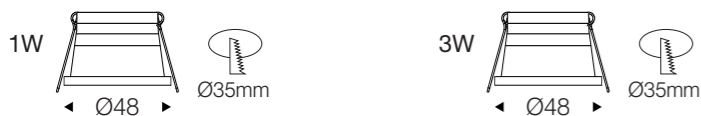

CE CB BIS




NB-224

Wattage: 1W/3W
 Lumens: 40LW/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K/RD
 /GR/BL/PK(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

60°

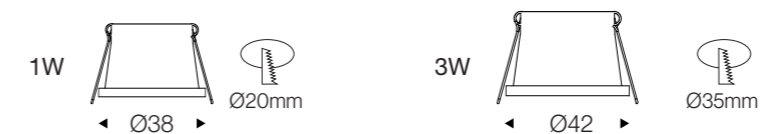

CE CB BIS




NB-225

Wattage: 1W
 Lumens: 40LW/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K/RD
 /GR/BL/PK(Single color)
 Material: Die casting Aluminum
 Housing colour : White/Black

Professional Optical
 Accessories

60°

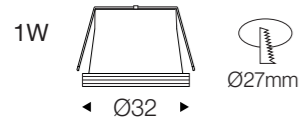

CE CB BIS





NB-284

Wattage: 3W
 Lumens: 40LW/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K/RD
 /GR/BL/PK(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : Gun black, Black, Gold, Rose Gold

Professional Optical
 Accessories


15°/24°/36°/60°

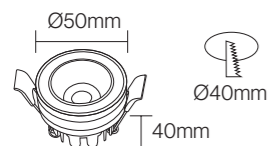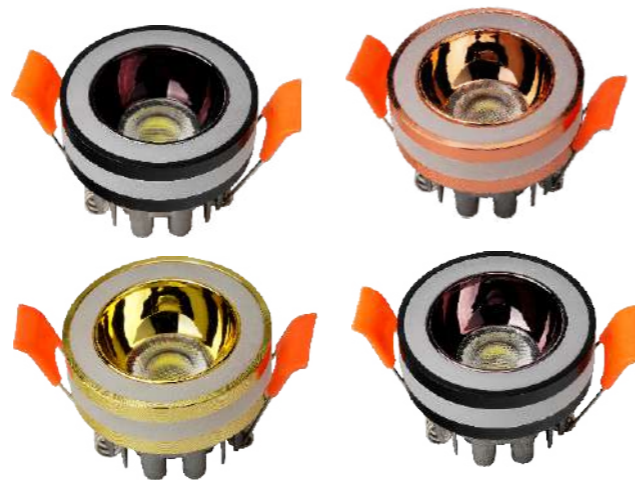

CE CB BIS



LED SURFACE DOWN LIGHT



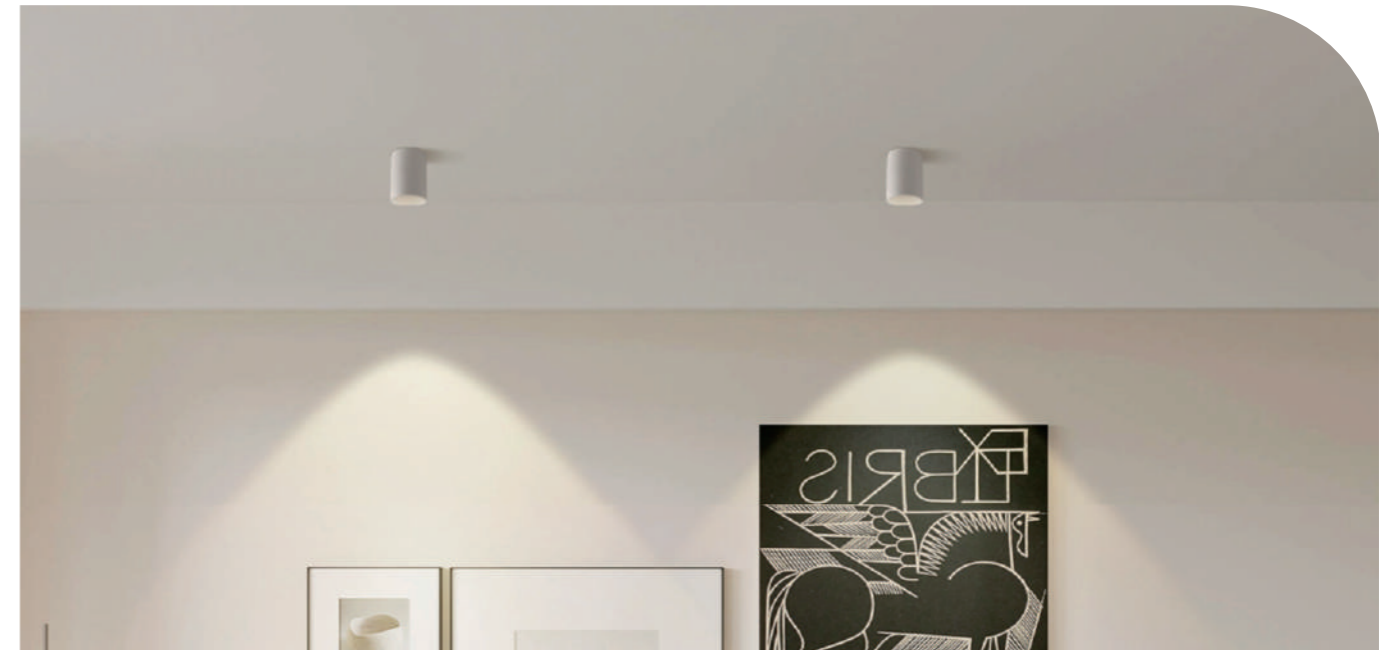


NB-306

Wattage: 7W/12W/18W
 Lumens: 485lm/966LM/1530LM
 Chip: SANAN COB
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH), BLACK(BK), GOLD(GD), CHROME(CH)
 Inner rings color: WHITE(WH), BLACK(BK), GOLD(GD), CHROME(CH)

Professional Optical
 Accessories

24°/36°



CE CB BIS




NB-307

Wattage: 7W/12W/18W
 Lumens: 70-80LM/W
 Chip: SANAN COB
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical Accessories

24°/36°

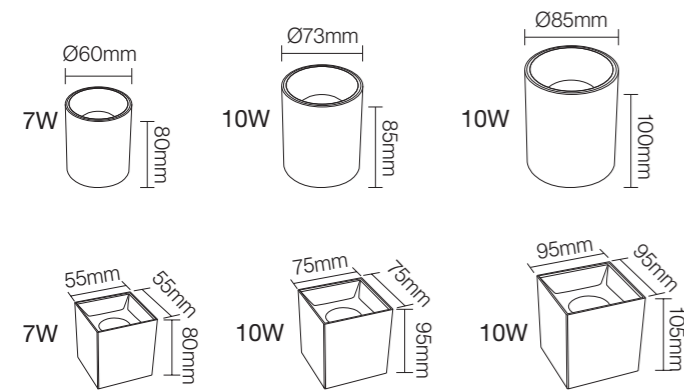

CE CB BIS




NB-391

Wattage: 7W/12W/18W
 Lumens: 90LM/W
 Chip: SANAN COB
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical Accessories

24°/36°

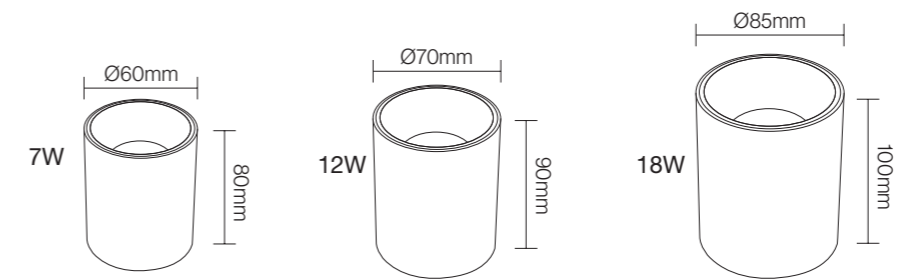

CE CB BIS




NB-388

Wattage: 7W/12W/18W
 Lumens: 90LM/W
 Chip: SANAN COB
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 GOLD(GD) ROSE GOLD(GD) CHROME(CH)

Professional Optical Accessories

15°/24°/36°/60°

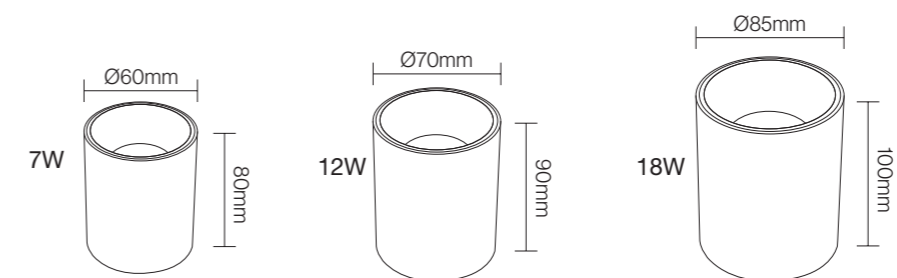

CE CB BIS






NB-389

Wattage: 12W/18W
 Lumens: ≥90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)



Professional Optical
 Accessories

15°/24°/36°/60°

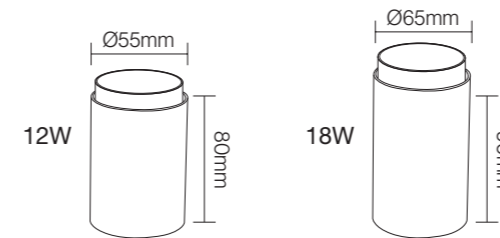

CE CB BIS 


NB-333

Wattage: 12W/18W
 Lumens: 90LM/W
 Operating temperature: -20°C—+40°C
 Life span: 50000H
 Material: Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 GREY BLACK(BK)
 Inner rings color: WHITE(WH) GREY



Professional Optical
 Accessories


18°/24°/36°

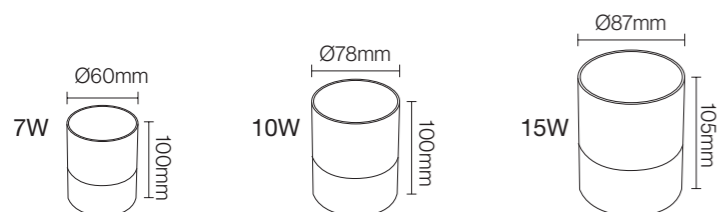

CE CB BIS 


NB-337

Wattage: 10W/15W/24W/30W
 Lumens: ≥80-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH)
 Inner rings color: WHITE(WH) GREY

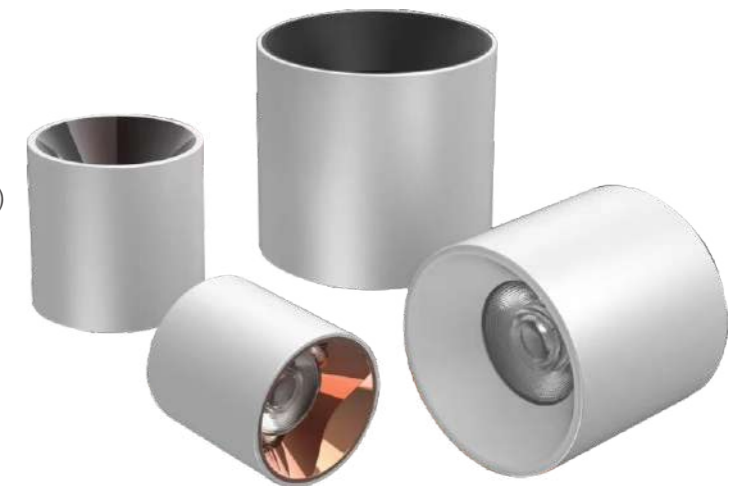

Professional Optical
 Accessories

18°/24°/36°

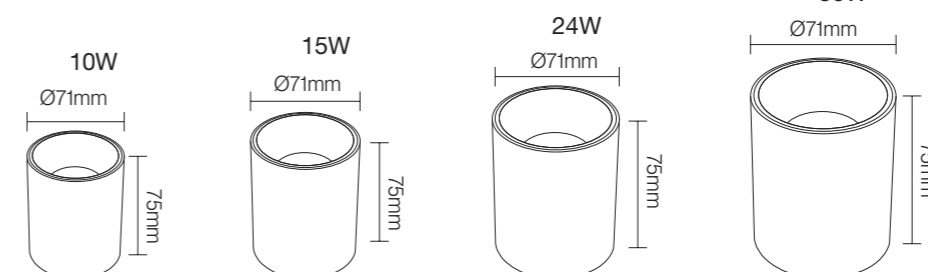


CE CB BIS 

NB-3107

Wattage: 12W
 Lumens: $\geq 80\text{LM/W}$
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical
Accessories

15°/24°/36°

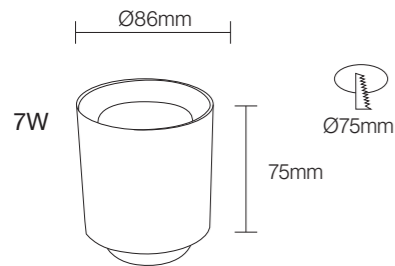


CE CB BIS

NB-335/NB-335-1

Wattage: 12W
 Lumens: $\geq 80\text{LM/W}$
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Inner rings color: WHITE(WH) BLACK(BK)
 GOLD(GD) CHROME(CH)

Professional Optical
Accessories

15°/24°/36°

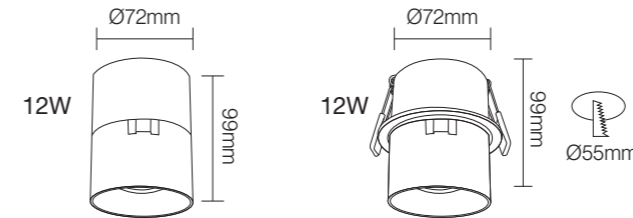



CE CB BIS

NB-390

Wattage: 12W/18W
 Lumens: $\geq 80\text{LM/W}$
 Operating temperature: SANAN COB
 Life span: 3000K/4000K/6000K(Single color)
 Material: AC85-265V Isolated driver
 Die casting Aluminum
 Housing colour : WHITE BLACK
 CHROME GOLD ROSE GOLD

Professional Optical
Accessories

15°/24°/36°/60°

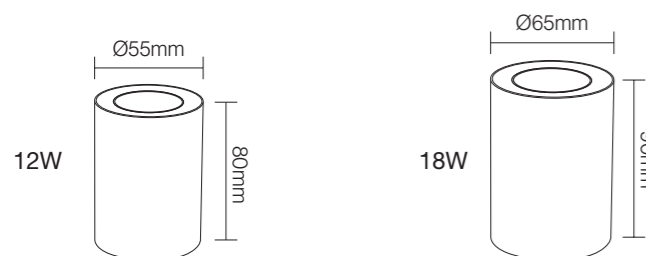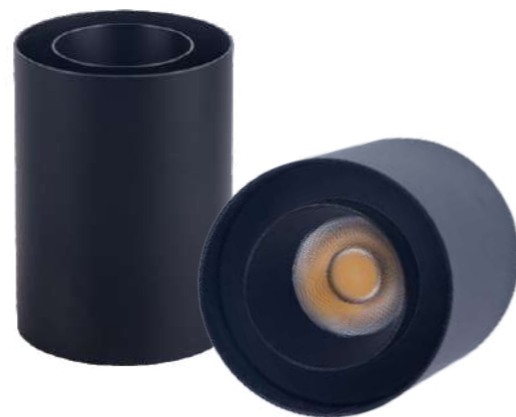


CE CB BIS

NB-336

Wattage: 12W
 Lumens: $\geq 80\text{LM/W}$
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

15°/24°/36°

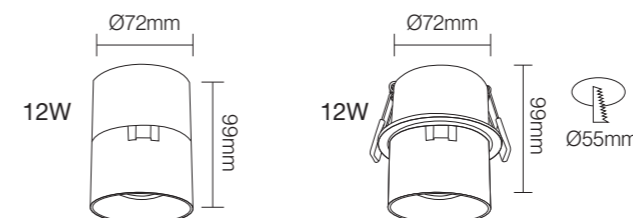


CE CB BIS

NB-394

Wattage: 8W/13W/18W
 Lumens: 720LM/1170LM/1620LM
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE BLACK
 Inner rings color: WHITE BLACK BLACK
 GOLD CHROME CHROME

Professional Optical
Accessories

24°

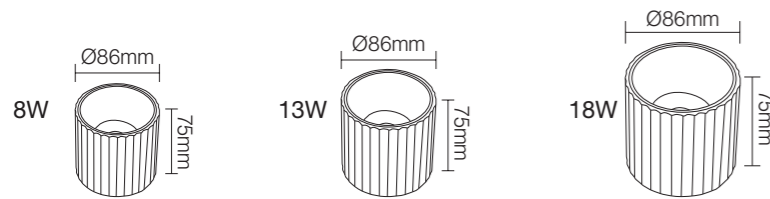

CE CB BIS




NB-351

Wattage: 12W/18W
 Lumens: ≥80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

15°/24°/36°/60°

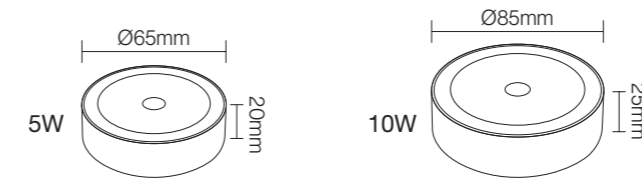

CE CB BIS




NB-395

Wattage: 8W/13W/18W
 Lumens: 720LM/1170LM/1620LM
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE BLACK
 Inner rings color: WHITE BLACK BLACK
 GOLD CHROME CHROME

Professional Optical
Accessories

24°

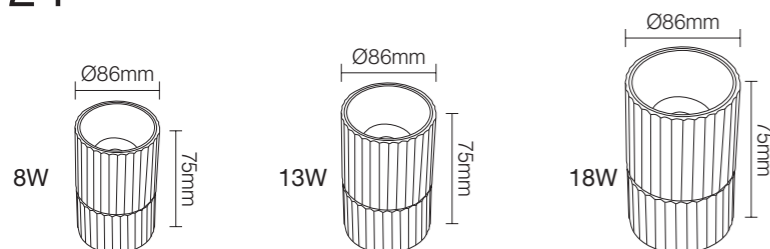

CE CB BIS




NB-352

Wattage: 12W/18W
 Lumens: ≥80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

18°/24°/36°

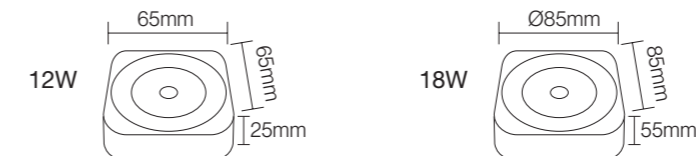

CE CB BIS




NB-355

Wattage: 10W/15W/20W/25W
 Lumens: 60-90LM/W
 Chip: OSRAM SMD 2835
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

120°

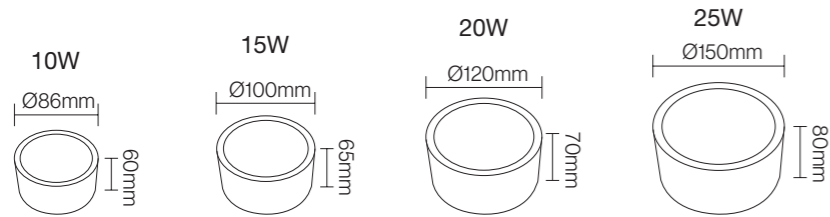

CE CB BIS




NB-391

Wattage: 7W/12W/18W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

36°

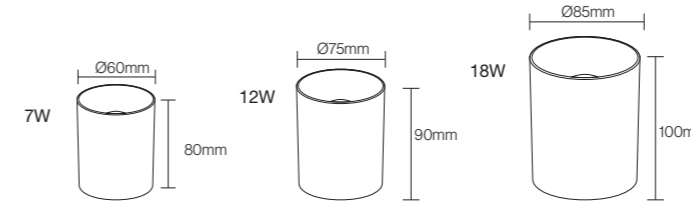

CE CB BIS




NB-3104

Wattage: 12W/20W/30W
 Lumens: 65/70/80 LM/W
 Chip: SANAN SMD
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE BLACK

Professional Optical
Accessories

120°

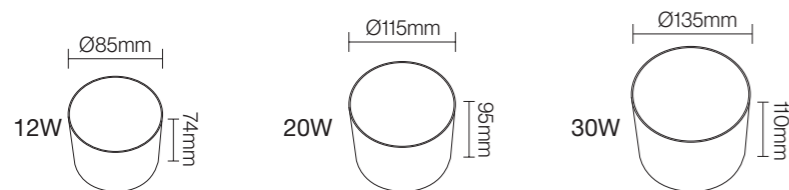


CE CB BIS



NB-392

Wattage: 5W/7W/10W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Aluminum+Acrylic
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories

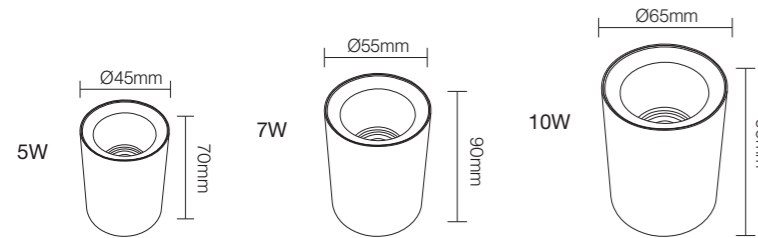


CE CB BIS



NB-3121

Wattage: 7W/15W/24W/35W
 Lumens: 60LM/W
 Chip: SMD 2835
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE BLACK
 Professional Optical Accessories

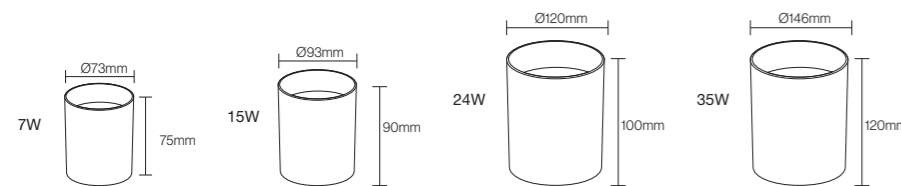

CE CB BIS



LED TRACK LIGHT




NB-144

Wattage: 10W/20W/30W
 Lumens: 80-85LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)
 Professional Optical Accessories



15°/24°/36°

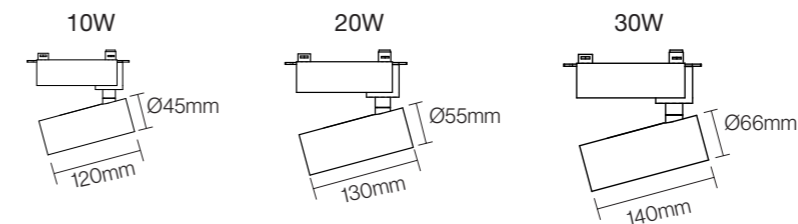

CE CB BIS




NB-711

Wattage: 10W/20W/30W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V PF:0.9
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

15°/24°/36°

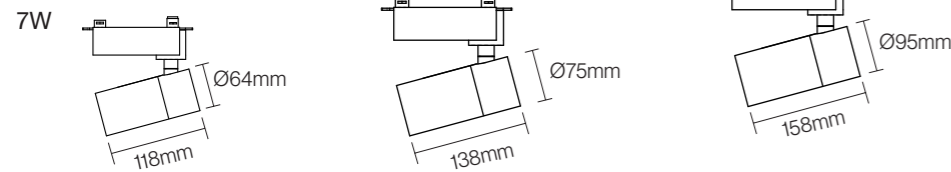

CE CB BIS




NB-110

Wattage: 10W/20W/30W/40W
 Lumens: 80-90LM/W
 Chip: SANAN SMD
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

15-60°

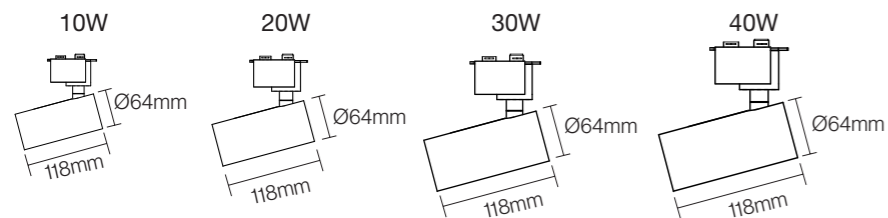

CE CB BIS




NB-102

Wattage: 10W/20W/30W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3IN1
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

15°/24°/36°

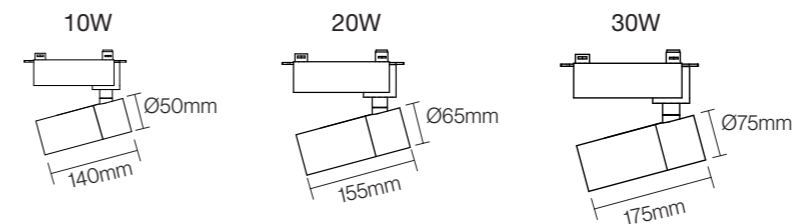

CE CB BIS




NB-103

Wattage: 10W/20W/30W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

15°/24°/36°

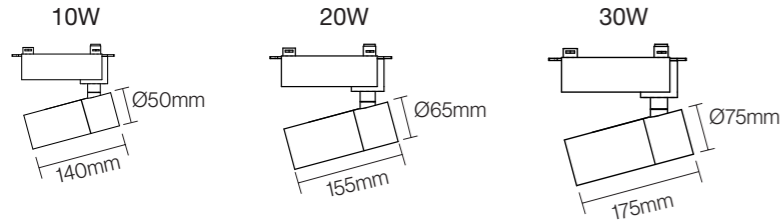

CE CB BIS




NB-179

Wattage: 18W/25W/35W
 Lumens: 70-80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

24°/36°

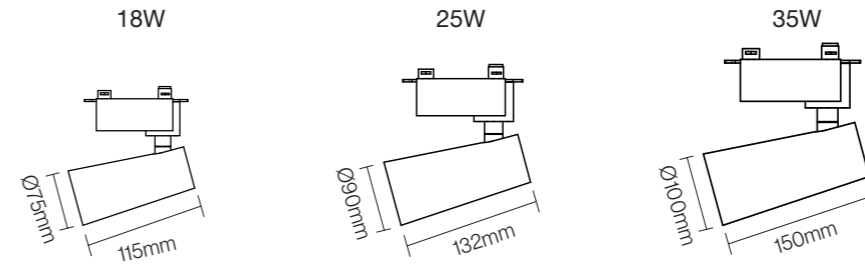

CE CB BIS




NB-118

Wattage: 15W/25W/35W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

24°/36°

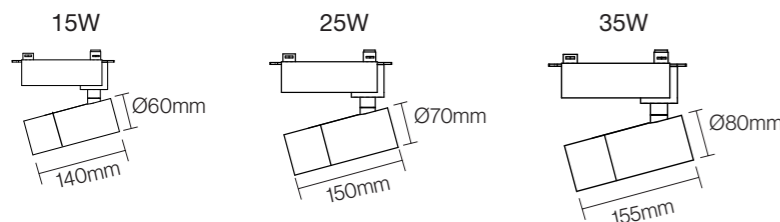

CE CB BIS




NB-121

Wattage: 15W/25W
 Lumens: 80-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
Accessories

15-60°

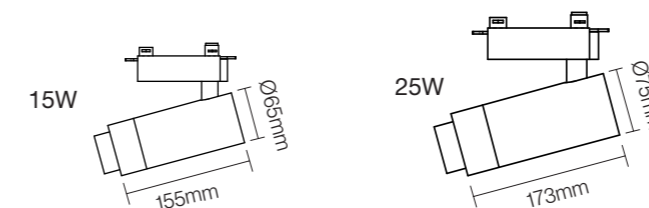

CE CB BIS



NB-1112

Wattage: 10W/20W/30W/36W//45W
 Lumens: 70-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 3000K+4000K+6000K(Tri color)


Input Power: AC165-265V

Material: Aluminum

Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

24°

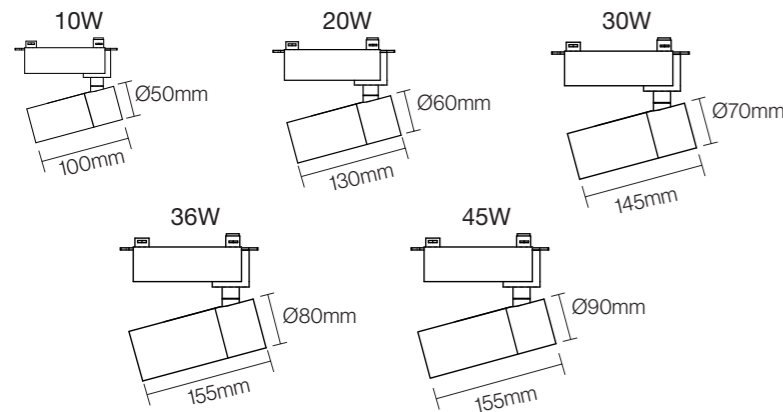

CE CB BIS



NB-1114

Wattage: 10W/20W/30W/36W//45W
 Lumens: 70-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 3000K+4000K+6000K(Tri color)


Input Power: AC165-265V

Material: Aluminum

Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

24°/36°

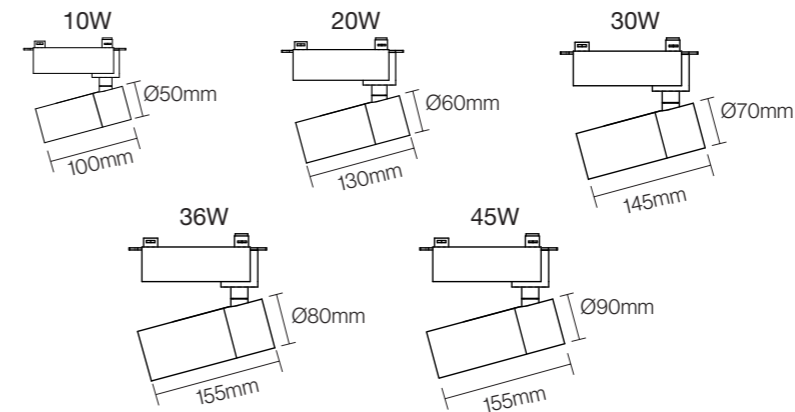

CE CB BIS



NB-1113

Wattage: 10W/20W/30W/36W
 Lumens: 70-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 3000K+4000K+6000K(Tri color)


Input Power: AC165-265V

Material: Die casting Aluminum

Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

15-60°

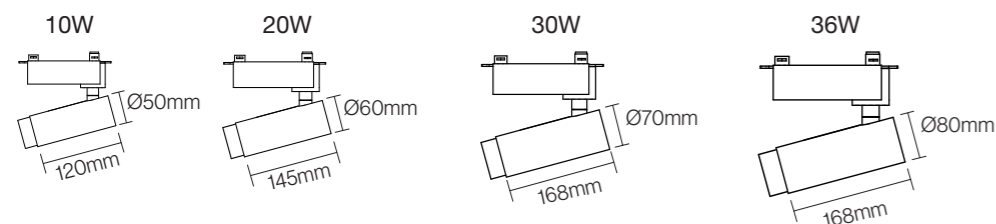

CE CB BIS



NB-1115

Wattage: 7W/12W/20W/30W
 Lumens: 70-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)


Input Power: AC165-265V

Material: Aluminum

Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

36°

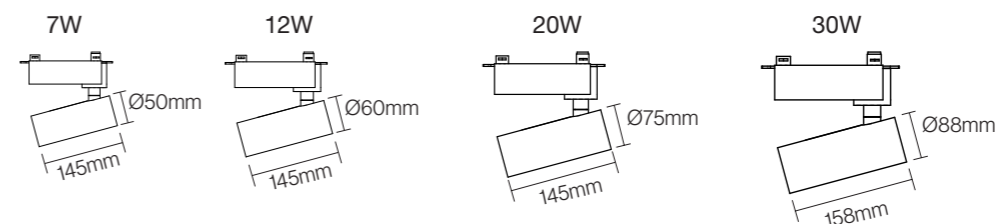


CE CB BIS



NB-1116-A

Wattage: 5W
 Lumens: 80LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
 Accessories
24°/36°

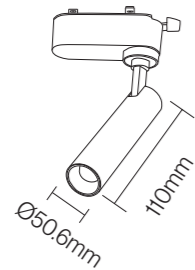


CE CB BIS



NB-1117

Wattage: 10W/20W/30W/36W/45W
 Lumens: 70-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 3000K+4000K+6000K(Tri Color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
 Accessories
24°

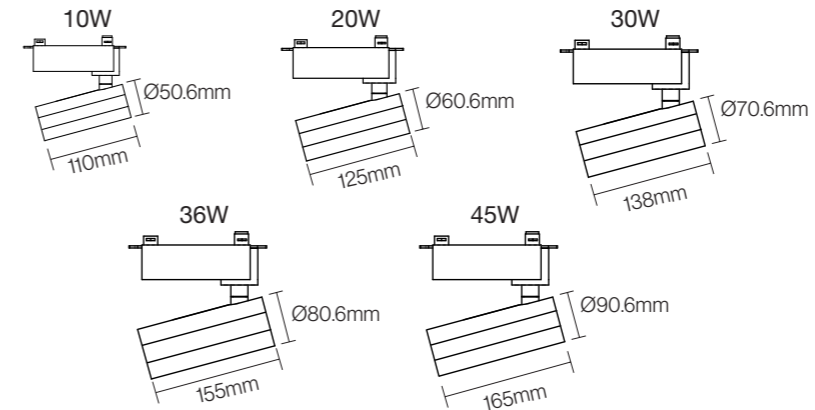


CE CB BIS



NB-1116-B

Wattage: 5W/2*5W
 Lumens: 80LM/W
 Chip: Bridgelux COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V
 Material: Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
 Accessories
24°/36°

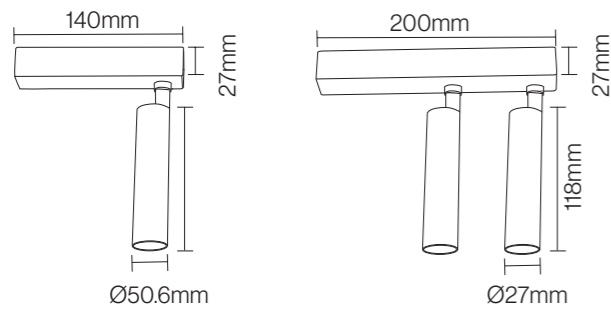


CE CB BIS



NB-1118

Wattage: 10W/20W/30W/36W/45W
 Lumens: 70-90LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 3000K+4000K+6000K(Tri Color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
 Accessories
24°

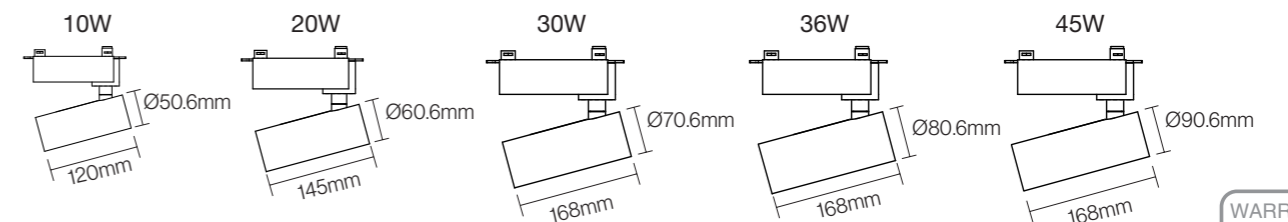

CE CB BIS




NB-792


Wattage: 10W/20W/30W/40W/50W/60W
 Lumens: 65-75LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
 Accessories

120°

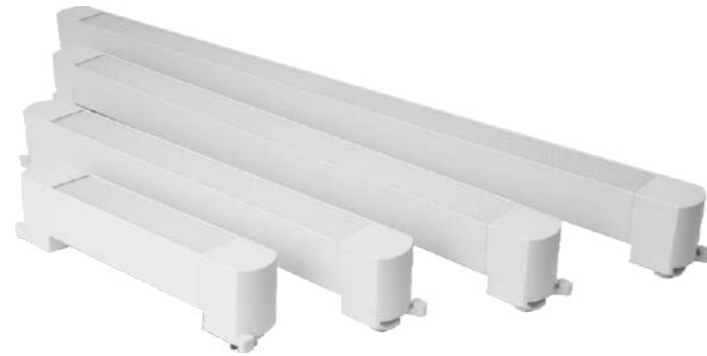

CE CB BIS

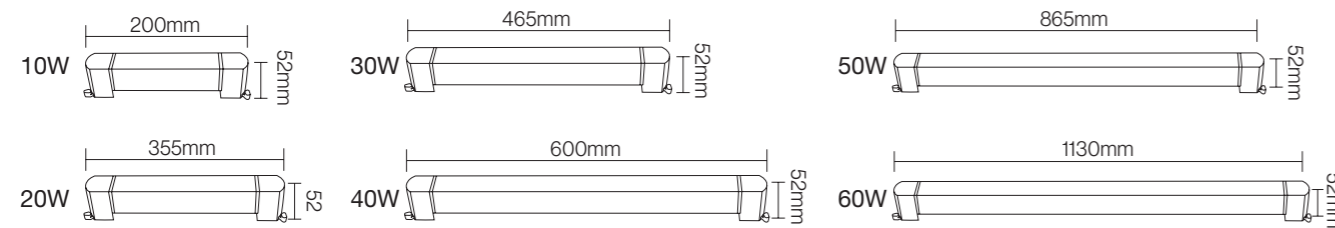


NB-793


Wattage: 10W/20W/30W/40W/50W/60W
 Lumens: 65-75LM/W
 Chip: SANAN COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical
 Accessories

15°/24°/36°

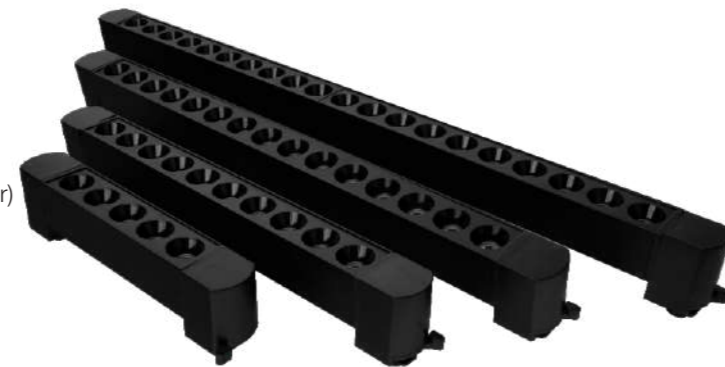

CE CB BIS

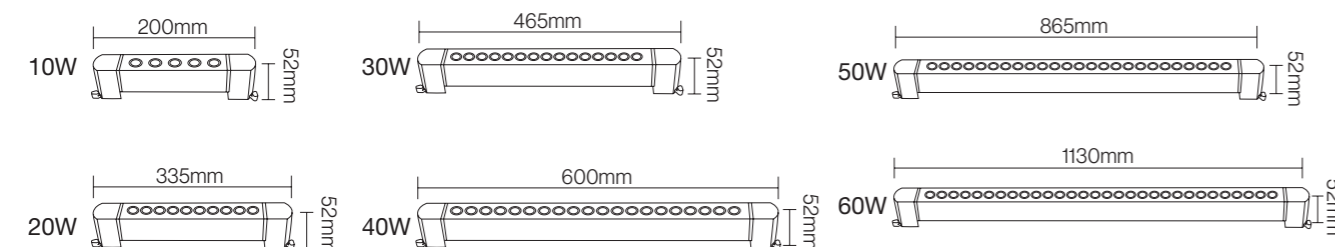

LED PANEL LIGHT



NB-626


Wattage: 8W/12W/16W/24W/30W
 Lumens: 80-90LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)/3IN1
 Input Power: AC165-265V
 Material: Die casting Aluminum+PC
 Housing colour : White

Professional Optical
 Accessories

120°




CE CB BIS

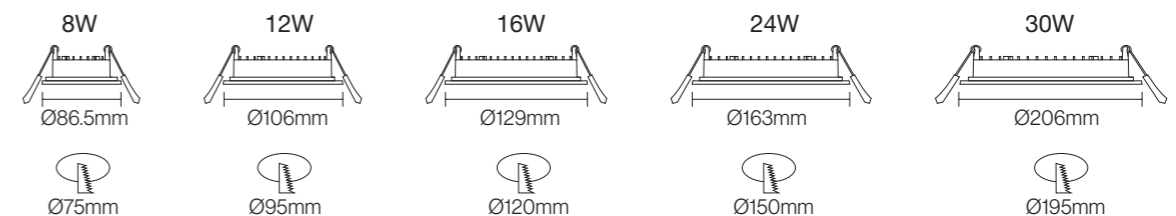


NB-671

Wattage: 8W/18W/24W/36W
 Lumens: 80-90LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: Die casting Aluminum+PC
 Housing colour : White

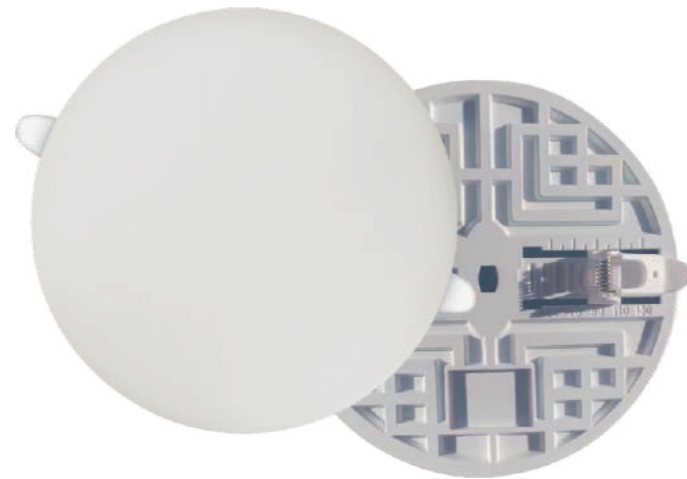

Professional Optical
Accessories

120°

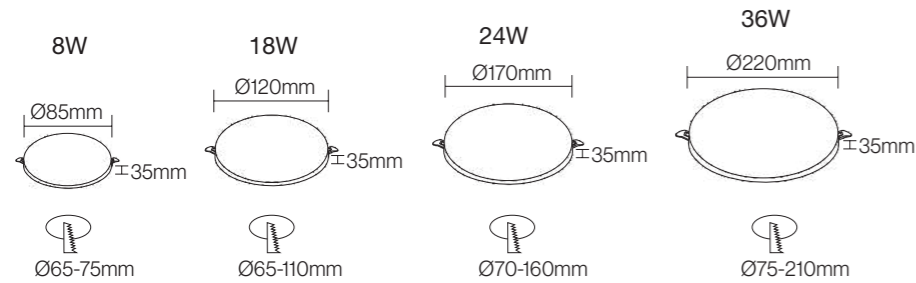

CE CB BIS




NB-666

Wattage: 16W/24W/36W
 Lumens: 100-110LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: Die casting Aluminum+PC
 Housing colour : White



Professional Optical
Accessories

120°

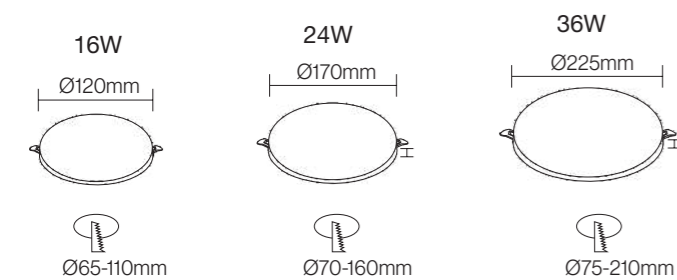

CE CB BIS




NB-667

Wattage: 16W/24W/36W
 Lumens: 100-110LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: Die casting Aluminum+PC
 Housing colour : White



Professional Optical
Accessories

120°

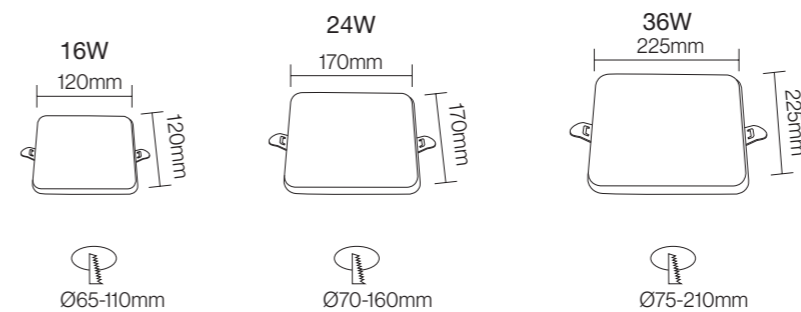

CE CB BIS




NB-666-RD

Wattage: 16W/24W/36W
 Lumens: 100-110LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: Die casting Aluminum+PC
 Housing colour : White



Professional Optical
Accessories

120°

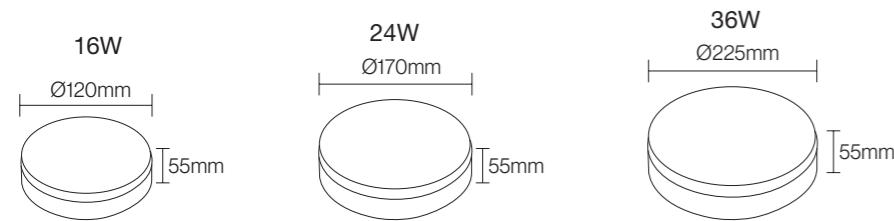


NB-09-032

Wattage: 3W/6W/9W/12W/18W/24W
 Lumens: 60-85LM/W
 LED Type: SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V Isolated Driver
 Material: Aluminum+PS
 Housing colour : White



Professional Optical
Accessories

120°

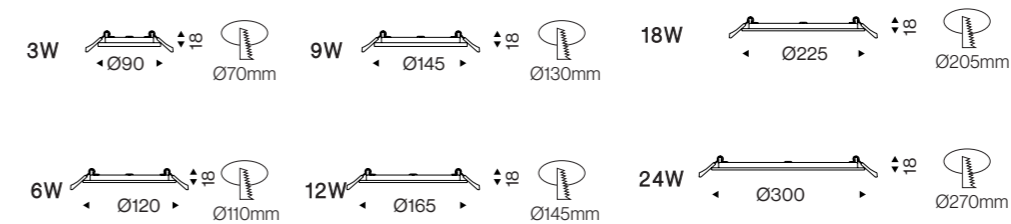


NB-666-SQ

Wattage: 16W/24W/36W
 Lumens: 100-110LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: Die casting Aluminum+PC
 Housing colour : White



Professional Optical
Accessories

120°

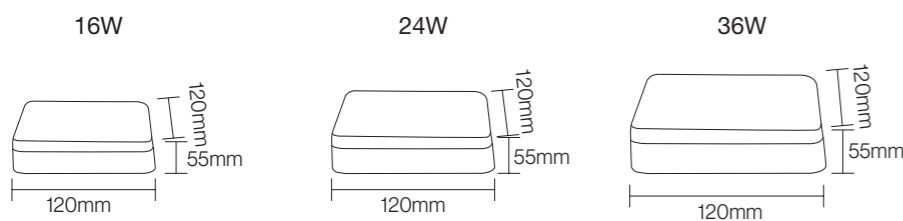


NB-09-033

Wattage: 3W/6W/9W/12W/18W/24W
 Lumens: 60-85LM/W
 LED Type: SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V Isolated Driver
 Material: Aluminum+PS
 Housing colour : White



Professional Optical
Accessories

120°

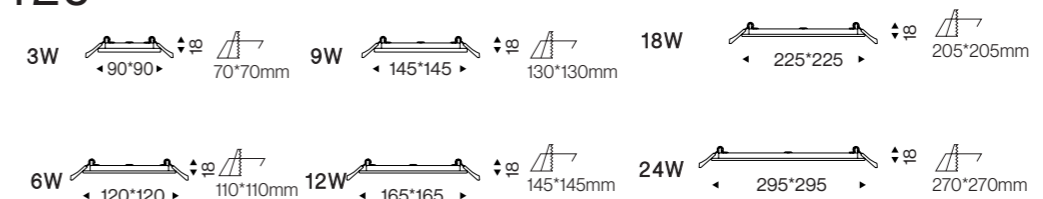


NB-09-034

Wattage: 6W/12W/18W/24W
 Lumens: 70LM/W
 LED Type: SMD
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V
 Material: Aluminum+PS
 Housing colour : White



Professional Optical
 Accessories

120°

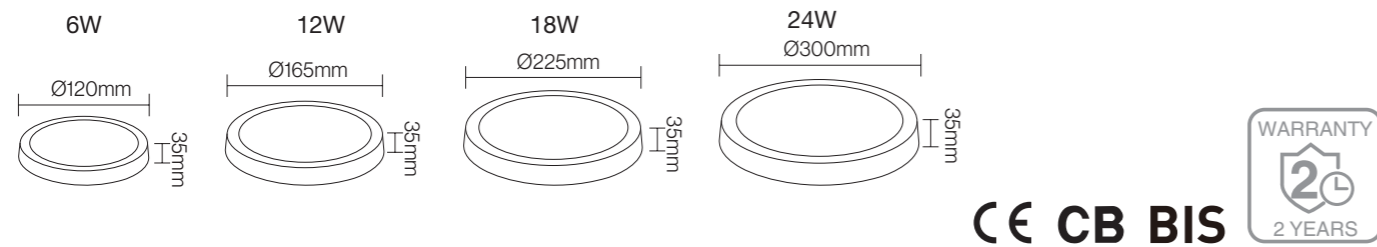


NB-699-RD

Wattage: 18W/24W/36W/48W
 Lumens: 100LM/W
 LED Type: SMD2835
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: PC
 Housing colour : White



Professional Optical
 Accessories

120°

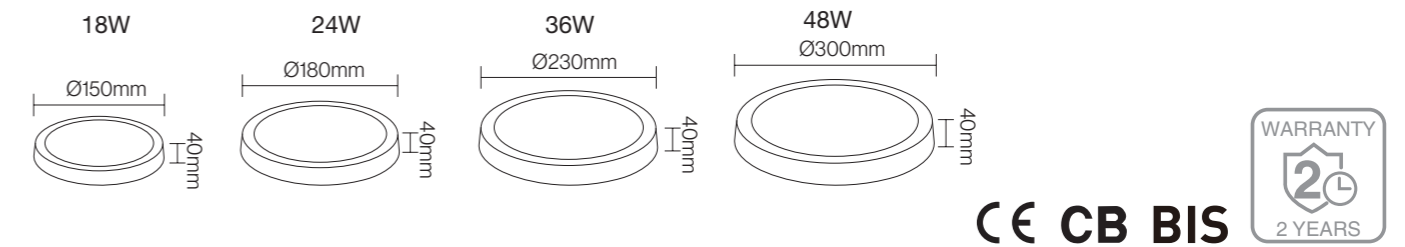


NB-09-035

Wattage: 6W/12W/18W/24W
 Lumens: 70LM/W
 LED Type: SMD
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V
 Material: Aluminum+PS
 Housing colour : White



Professional Optical
 Accessories

120°

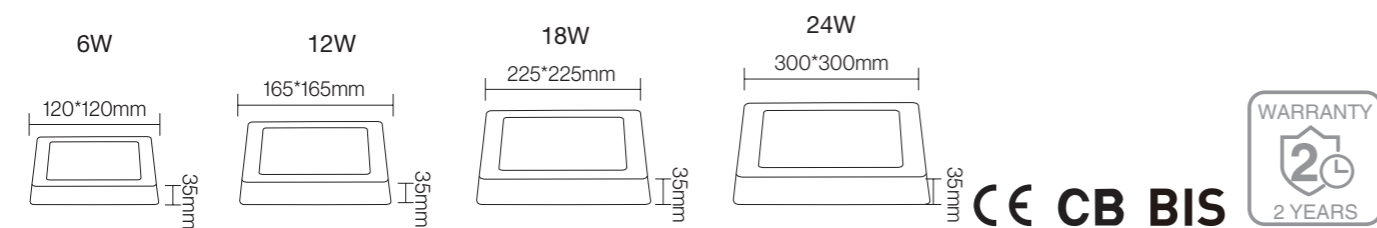


NB-699-SQ

Wattage: 18W/24W/36W/48W
 Lumens: 100LM/W
 LED Type: SMD2835
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: PC
 Housing colour : White



Professional Optical
 Accessories

120°

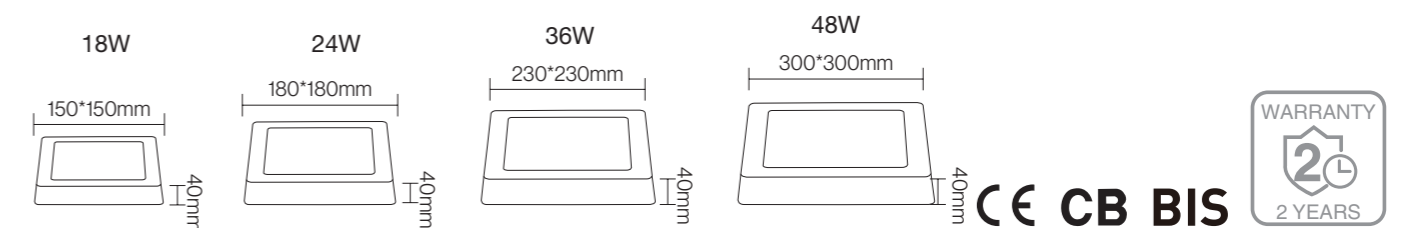


LD-18-672

Wattage: 12W/22W/32W
 Lumens: 90LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: Plastic
 Housing colour : White



Professional Optical
Accessories

120°

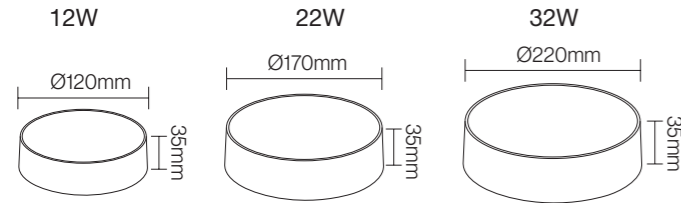

CE CB BIS




LD-18-673

Wattage: 16W/24W/36W
 Lumens: 100-110LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: Die casting Aluminum+PC
 Housing colour : White



Professional Optical
Accessories

120°

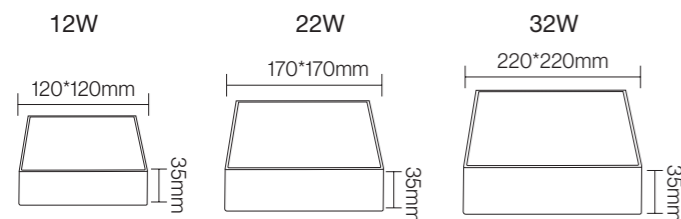

CE CB BIS




LD-11-607

Wattage: 24W/28W/38W/48W
 Lumens: 90LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: ABS
 Housing colour : White/Black



Professional Optical
Accessories

120°

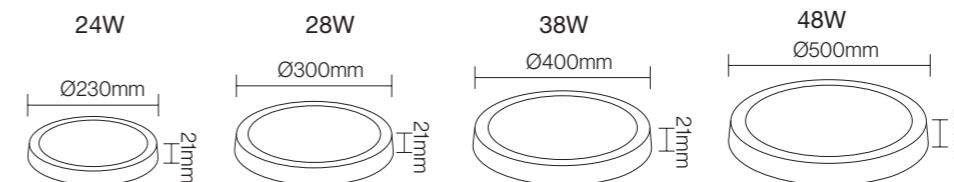


CE CB BIS



LD-14-582

Wattage: 24W/32W/42W/52W/100W
 Lumens: 100LM/W
 LED Source: SANAN SMD1025
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC85-265V
 Material: ①Aluminum Splicing frame+Iron backside
 ②Aluminum frame+Iron backside
 ③Plastic Splicing frame+Iron backside

Housing colour : Matt white
 Professional Optical Accessories **120°**

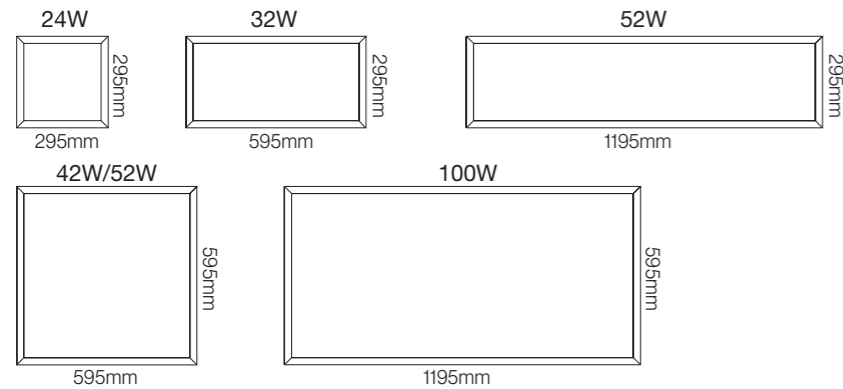

CE CB BIS





LED LINEAR LIGHT



NB-6102

Wattage: 42-48W
 Lumens: 120LM/W
 LED Type: SANAN 2835*240D
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: Non-Isolated driver 165V-245V
 Material: ①Plastic
 ②Aluminum

Housing colour : White
 Professional Optical Accessories **120°**

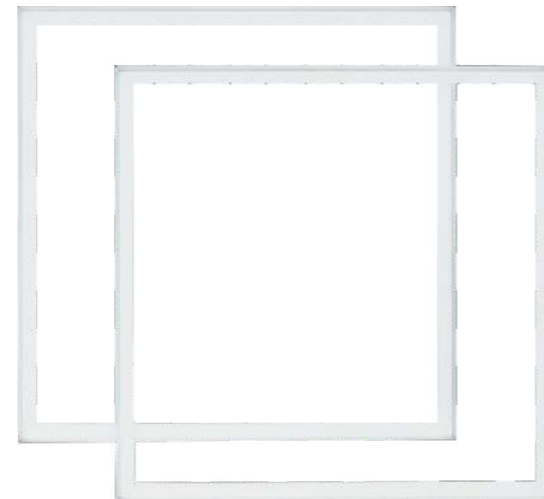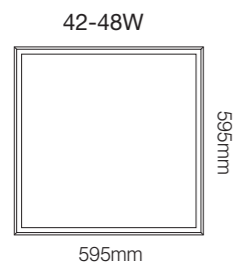

CE CB BIS




NB-743

Wattage: 2W/4W/6W/8W/18W
 Lumens: 70LM/W
 Chip: SANAN3030 COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC85-265V Isolated driver
 Material: Die casting Aluminum
 Housing colour : WHITE(WH) BLACK(BK)

Professional Optical Accessories

15°/24°/36°

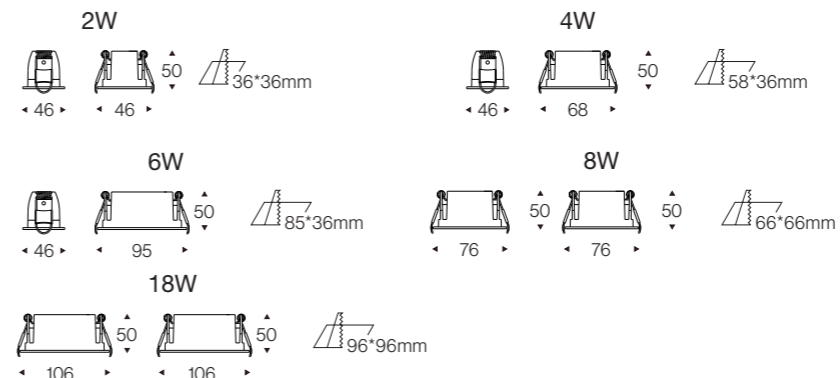

CE CB BIS






NB-712

Wattage: 5W/10W
 Lumens: 90-95LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : White/Black



Professional Optical
 Accessories

15°/24°/36°

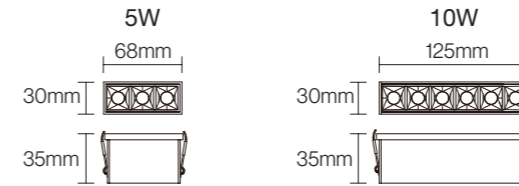

CE CB BIS


NB-710

Wattage: 10W/20W/30W
 Lumens: 70LM/W
 LED Type: SANAN SMD
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC165-265V
 Material: Die casting Aluminum
 Housing colour : White/Black



Professional Optical
 Accessories

15°/24°/36°

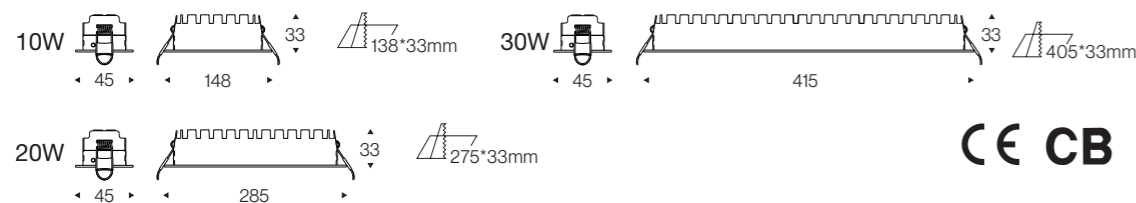

CE CB BIS


NB-783

Wattage: 6W/10W/20W
 Lumens: 80LM/W
 LED Type: Osram COB
 CCT: 3000K/4000K/6500K(Single color)
 Input Power: AC165-265V
 Material: Aluminum+PS
 Housing colour : White/Black



Professional Optical
 Accessories

18°/24°/36°

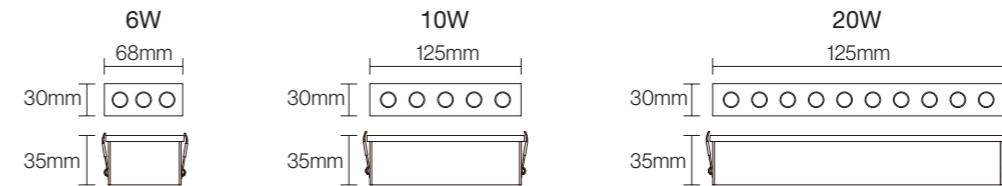

CE CB BIS