


OKELI<sup>®</sup>  
LIGHTING

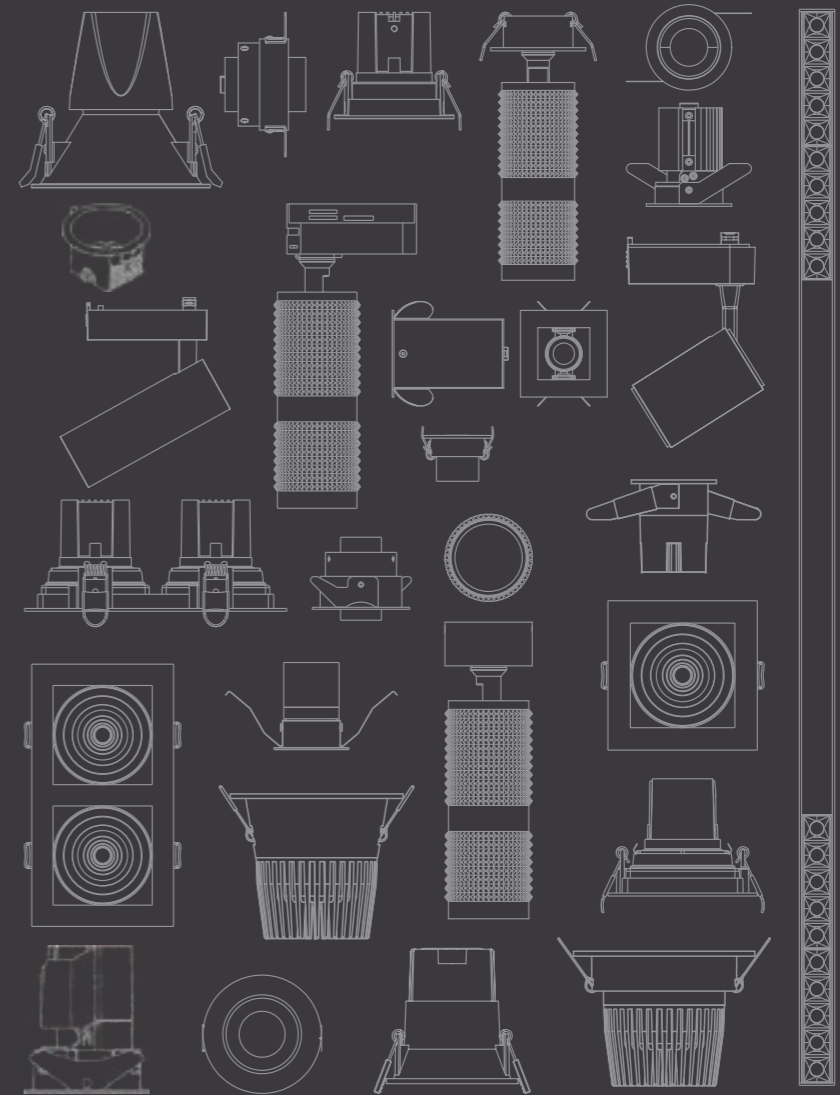

PRODUCT CATALOGUE 2024

OKELI<sup>®</sup>  
LIGHTING

## INDOOR TECHNICAL LIGHTS

中山市奥克莱灯饰有限公司  
OKELI LIGHTING CO.,LTD

Factory Address  
No.36 ChangAn North Road,Henglan Town,  
Zhongshan City,Guangdong,China

Website  
[www.okelilamp.com](http://www.okelilamp.com)

Mailbox  
[okeli@neworb.cn](mailto:okeli@neworb.cn)

Service Hotline  
0086-760-87619872



OKELI<sup>®</sup>  
LIGHTING

2024 | PRODUCT  
CATALOGUE

35000<sup>m<sup>2</sup></sup>  
Industrial Parks

5<sup>Years</sup>  
WARRANTY

13<sup>Years</sup>  
Lighting Product  
Production Experience

2600<sup>m<sup>2</sup></sup>  
Product Showroom

25<sup>Years</sup>  
Exclusive lighting sales  
and service

320000<sup>pcs</sup>  
Capacity per month

10<sup>lines</sup>  
Number of assembly line

500  
Number of total employee

105  
Product Series

## We are OKELI



*Modern*

*Innovation*

*Smart*

*Eco-friendly*

*Cost-effective*

OKELI Lighting Co.,Ltd., established in 2010, is one of the large lighting enterprises, integrated with design, research, manufacturing and marketing.



## *High quality dust-free production workshop*



## *In-house manufacturing*


Our manufacturing plant covers an area over 35000 m<sup>2</sup>, with the completed manufacturing chain from raw material to finished product. We have a high quality dust-free production workshop, strict control of product quality and production process. We've built up international top standard laboratory to assure technical study and innovation.

With continuously growing, our products are mostly appreciated by global buyers, and "OKELI" brand has been expanded rapidly all over the world.

## *LED technology*



LED aging line

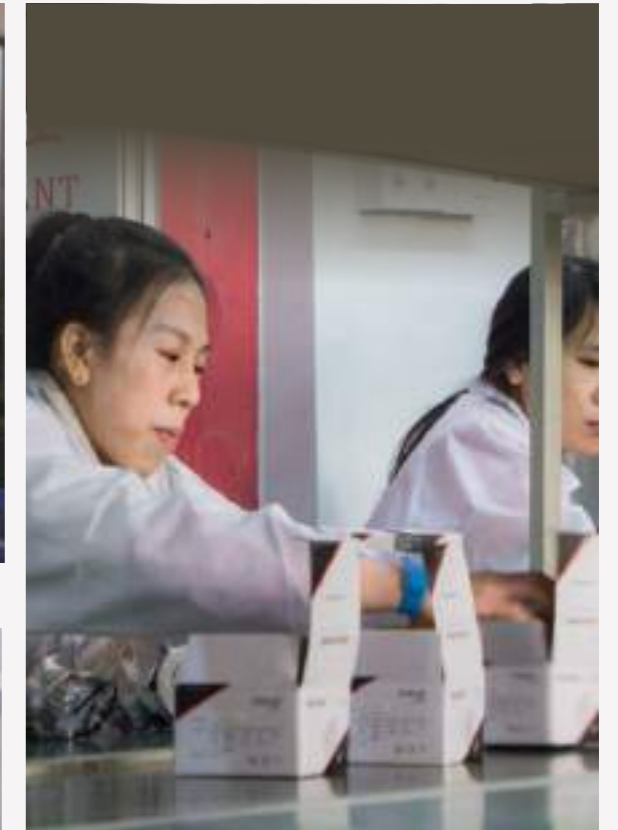

LED packaging line



The LED assembly line

Since 2010, OKELI has been a reliable supplier of LED luminaires, prioritizing top-notch production quality. The commitment to excellence starts with a meticulous spectroscopic analysis of incoming LED components. The production process utilizes optimized assembly lines for PCB assembly and high-end ESD assembling areas. Rigorous testing of the final product ensures the achievement of the highest manufacturing standards. OKELI is dedicated to delivering perfectly developed and flawlessly manufactured luminaires

# *Products*



*A wide range of led lighting products cover both residential and commercial lighting field.*



We are capable to provide big producing capacity; We are strictly following ISO9001 management system, and with strict ISO9001 quality control system and CE/CB/ROHS/SAA/VDE/BIS certified products, we can meet all clients' customization requirements. We've built up international top standard laboratory to assure technical study and innovation, and our global design team with strong technical capacity and rich experience are capable to fulfill both OEM and ODM requirement from our customers, and we've kept gaining many patents and intellectual property rights.

*One-on-one project tracking and full support*



*Customized solutions*

Even the most extensive product programs sometimes needs special requirements for specific projects. We have a number of experienced designers who are responsible for technical design solutions and will implement them quick. We offer one-on-one project tracking and full support to ensure exceptional service. Each project is assigned one consultant to ensure timely execution.



# Team service



LED  
TECHNICAL  
RANGE


## LED TRACK LIGHTS



**LD-01-748**  
PAGE.002



**LD-01-527**  
PAGE.003



**LD-01-500**  
PAGE.005



**LD-01-506**  
PAGE.007



**LD-01-525**  
PAGE.009




**LD-01-533**  
PAGE.011



**LD-01-583**  
PAGE.012



**LD-01-706**  
PAGE.013



**LD-01-626**  
PAGE.014




**LD-01-656**  
PAGE.015



**LD-01-801**  
PAGE.016

PRODUCT  
INDEX

# LED DOWNLIGHTS



**LD-03-215**  
PAGE.017



**LD-03-230**  
PAGE.018



**LD-03-343**  
PAGE.019



**LD-03-412**  
PAGE.020




**LD-03-413**  
PAGE.021




**LD-03-447**  
PAGE.022



**LD-03-453**  
PAGE.023



**LD-03-457**  
PAGE.025



**LD-03-569**  
PAGE.027




**LD-03-560**  
PAGE.029



**LD-03-582**  
PAGE.030



**LD-03-571**  
PAGE.031



**LD-03-572**  
PAGE.032



**LD-03-719**  
PAGE.033



**LD-03-729**  
PAGE.034



**LD-03-730**  
PAGE.035

# LED DOWNLIGHTS



**LD-03-731**  
PAGE.036



**LD-03-732**  
PAGE.037



**LD-03-733**  
PAGE.038



**LD-03-734**  
PAGE.039



**LD-03-736**  
PAGE.040



**LD-03-790**  
PAGE.041



**LD-03-791**  
PAGE.042




**LD-03-792**  
PAGE.043



**LD-03-793**  
PAGE.044



**LD-03-794**  
PAGE.045



**LD-03-795**  
PAGE.046



**LD-03-796**  
PAGE.047



**LD-03-797**  
PAGE.048



**LD-03-798**  
PAGE.049



**LD-03-799**  
PAGE.050



## LED FOOT LIGHTS



**LD-07-252**  
PAGE.052



**LD-07-446**  
PAGE.053



**LD-07-297**  
PAGE.054




**LD-07-152**  
PAGE.055


## LED CABINET LIGHTS



**LD-08-303**  
PAGE.057



**LD-08-304**  
PAGE.058




**LD-07-152**  
PAGE.091

## LED PANEL LIGHTS




**LD-09-574&575**  
PAGE.064



**LD-09-232&233**  
PAGE.065


## LED Spot Lights




**LD-10-458**  
PAGE.068



**LD-10-477**  
PAGE.069



**LD-10-479**  
PAGE.070



**LD-10-480**  
PAGE.071



**LD-10-482**  
PAGE.073



**LD-10-489**  
PAGE.074



**LD-10-488**  
PAGE.075



**LD-10-504**  
PAGE.077




**LD-10-512**  
PAGE.078



**LD-10-562**  
PAGE.079




**LD-10-573**  
PAGE.081



**LD-10-576**  
PAGE.085



**LD-10-584**  
PAGE.086



**LD-10-588**  
PAGE.087



**LD-10-614**  
PAGE.088




**LD-10-626**  
PAGE.089

## LED Spot Lights



**LD-10-645**  
PAGE.092



**LD-10-652**  
PAGE.093



**LD-10-685**  
PAGE.094



**LD-10-705**  
PAGE.095



**LD-10-697**  
PAGE.097



**LD-10-738**  
PAGE.098




**LD-10-740**  
PAGE.099



**LD-10-741**  
PAGE.0100



**LD-10-697**  
PAGE.101



**LD-10-738**  
PAGE.102



**LD-10-740**  
PAGE.103


## DECORATIVE SPOTLIGHTS




**KL-26-2746**  
PAGE.104



**KL-26-591**  
PAGE.105



**KL-26-595**  
PAGE.106



**KL-26-599**  
PAGE.107



**KL-26-599**  
PAGE.108



**KL-26-3235**  
PAGE.109



**KL-26-3327**  
PAGE.110

## LED SURFACE LIGHTS



**LD-11-453**  
PAGE.112



**LD-11-568**  
PAGE.113



**LD-11-524**  
PAGE.115



**LD-06-503**  
PAGE.117



**LD-11-443**  
PAGE.118



**LD-11-716**  
PAGE.119



**LD-11-454**  
PAGE.120



**LD-02-271**  
PAGE.121



## LED SURFACE LIGHTS



**LD-02-272**  
PAGE.122



**LD-11-682**  
PAGE.123



**LD-11-715**  
PAGE.124



**LD-11-563**  
PAGE.125



**LD-11-564**  
PAGE.126



**LD-02-267**  
PAGE.127



**LD-11-576**  
PAGE.128



**LD-11-800**  
PAGE.129



**LD-11-802**  
PAGE.130

## LED PENDANT LIGHTS



**LD-12-440**  
PAGE.132



**LD-12-525**  
PAGE.133



**LD-12-626**  
PAGE.135



**LD-12-719**  
PAGE.136



**LD-12-500**  
PAGE.137



**LD-12-251**  
PAGE.138



**LD-12-428**  
PAGE.139



**LD-12-610**  
PAGE.140



**KL-11-594**  
PAGE.141



**KL-12-594**  
PAGE.142



**LD-12-806**  
PAGE.143



**LD-12-807**  
PAGE.144



**LD-12-062**  
PAGE.145

## LED LINEAR LIGHTS



**LD-06-669&LD-06-670**  
PAGE.147



**LD-14-570**  
PAGE.149



**LD-14-612**  
PAGE.151




**LD-14-611**  
PAGE.153




**LD-06-641**  
PAGE.154

# MAGNETIC TRACK LIGHTING



**Magnetic Grille Light**  
PAGE.156




**Magnetic Linear Light**  
PAGE.157




**Magnetic Folding Light**  
PAGE.158




**Magnetic Pendant Light**  
PAGE.159




**Corner Connector**  
PAGE.166



**Corner Connector**  
PAGE.166



**Vertical Corner Connector**  
PAGE.166



**Vertical Corner Connector**  
PAGE.166



**Magnetic Spotlight**  
PAGE.160




**Concealed Mounted Magnetic Track**  
PAGE.161




**Plastering Flush Mounted Magnetic Track**  
PAGE.162



**Concealed Mounted Magnetic Track**  
PAGE.163



**Vertical Corner Connector**  
PAGE.166



**Surface Mounted Magnetic Track**  
PAGE.164



**Magnetic Power**  
PAGE.165



**Input power connector**  
PAGE.166



**Batten Standard(Lighting)**  
PAGE.166

# CURVE MAGNETIC TRACK LIGHTING



**LD-15-67702**  
PAGE.168



**LD-15-67701**  
PAGE.168



**LD-15-67801**  
PAGE.169



**LD-15-67802**  
PAGE.169




**Surface&Pendant Accessories**  
PAGE.166



**Surface mounted connecting piece**  
PAGE.166



**Concealed mounted connecting**  
PAGE.166



**Corner Connector**  
PAGE.166



**LD-15-68001**  
PAGE.169



**LD-15-67901**  
PAGE.170



**Magnetic Power**  
PAGE.171



**Input power connector**  
PAGE.172



# ULTRA THIN MAGNETIC TRACK LIGHTING



**Magnetic Linear Light**  
PAGE.174




**Magnetic Grille Light**  
PAGE.175



**Magnetic Anti-glare  
Function Grille Light**  
PAGE.176



**Magnetic Folding Light**  
PAGE.177



**Magnetic Track**  
PAGE.188



**Magnetic Track**  
PAGE.188



**Magnetic Power**  
PAGE.189



**Wire Box**  
PAGE.190



**Magnetic Folding Light**  
PAGE.178



**Magnetic Folding Light**  
PAGE.179



**Magnetic Spotlight**  
PAGE.180



**Magnetic Spotlight**  
PAGE.181



**Wire Box**  
PAGE.190



**Input power connector**  
PAGE.190



**Corner Connector**  
PAGE.190



**Corner Connector**  
PAGE.190




**Magnetic Spotlight**  
PAGE.182



**Magnetic Pendant Light**  
PAGE.183



**Magnetic Pendant Light**  
PAGE.184




**Magnetic Spotlight**  
PAGE.185




**Corner Connector**  
PAGE.190



**Curve Corner Connector**  
PAGE.190



**'T'ype Corner Connector**  
PAGE.190




**Vertical Corner Connector**  
PAGE.190



**Magnetic Wall Light**  
PAGE.186



**Magnetic Spotlight**  
PAGE.187



**Magnetic Track**  
PAGE.188



**Magnetic Track**  
PAGE.188

# BELT LAMP LIGHTING




**D28**  
PAGE.193




**LD-15-815**  
PAGE.196




**LD-15-814**  
PAGE.197




**LD-15-816**  
PAGE.200



**D28-Suspended End Cap**  
PAGE.206



**D28-Suspended Buckle**  
PAGE.206



**D28-Electric Connector**  
PAGE.206



**LD-15-821**  
PAGE.201



**LD-15-820**  
PAGE.202



**LD-15-822**  
PAGE.203



**LD-15-818**  
PAGE.204

# 5MM MAGNETIC TRACK LIGHTING




**LD-15-819**  
PAGE.204



**LD-15-817**  
PAGE.205



**D28-Round Power Box**  
PAGE.206



**D28-Linear Power Box**  
PAGE.206



**5mm Magnetic Grille Light**  
PAGE.208



**5mm Magnetic Linear Light**  
PAGE.209



**5mm Magnetic Spotlight**  
PAGE.210



**Magnetic Pendant Light**  
PAGE.211



**D28-Surface Terminal Box**  
PAGE.206



**D28-Recessed Terminal Box**  
PAGE.206



**D28-Belt Fixed Base**  
PAGE.206



**D28-Locating Rack**  
PAGE.206



**Magnetic Spotlight**  
PAGE.212



**5mm Magnetic Spotlight**  
PAGE.213



**5mm Magnetic Spotlight**  
PAGE.214



**5mm Mounted Magnetic Track**  
PAGE.215

# Round Tube Magnetic Track Light



**LD-15-780**  
PAGE.218



**LD-15-781**  
PAGE.219



**LD-15-782**  
PAGE.220



**LD-15-783**  
PAGE.221



**L shape connector joint-Left**  
PAGE.228



**L shape connector joint-Right**  
PAGE.228



**I shape connector joint**  
PAGE.228



**T shape connector joint**  
PAGE.228



**LD-15-784**  
PAGE.222



**LD-15-785**  
PAGE.223



**LD-15-786**  
PAGE.224



**LD-15-787**  
PAGE.225



**X shape connector joint**  
PAGE.228



**Fixed buckle**  
PAGE.228



**LD-15-788**  
PAGE.226



**Round Tube Magnetic Power01**  
PAGE.227



**Input connector**  
PAGE.228



**Fixed accessories**  
PAGE.228



**Universal joint**  
PAGE.228



**L shape connector joint-Wall to Ceiling**  
PAGE.228



**Input connector front jonit**  
PAGE.228



**Input connector end jonit**  
PAGE.228





**LED TRACK LIGHTS**

**Technical light**



**L0-01-748**

**DATA SHEET**

Wattage	10W/15W
Lumen Flux	500LM/750LM
Color Temperature	3000K/4000K/6000K
Beam angle	15°-50°
Product Color	Gold&Black
LED Light Source	SMD2835
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

**DETAILS**




CE CB RoHS BIS

Cooperative brand:





## EXPLORER SERIES

### LD-01-527

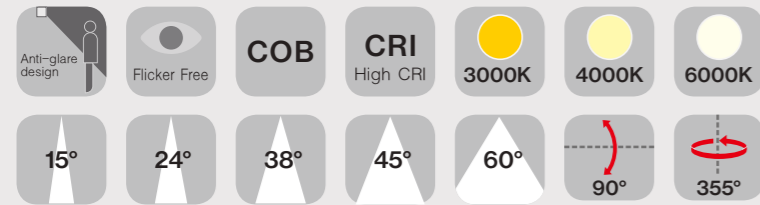

Explorer series features a distinctive telescope shape with a novel design, and a 180° adjustable track head to cater to various applications. Crafted from precision aluminum material, it enhances heat dissipation, ensuring stable and efficient lighting.

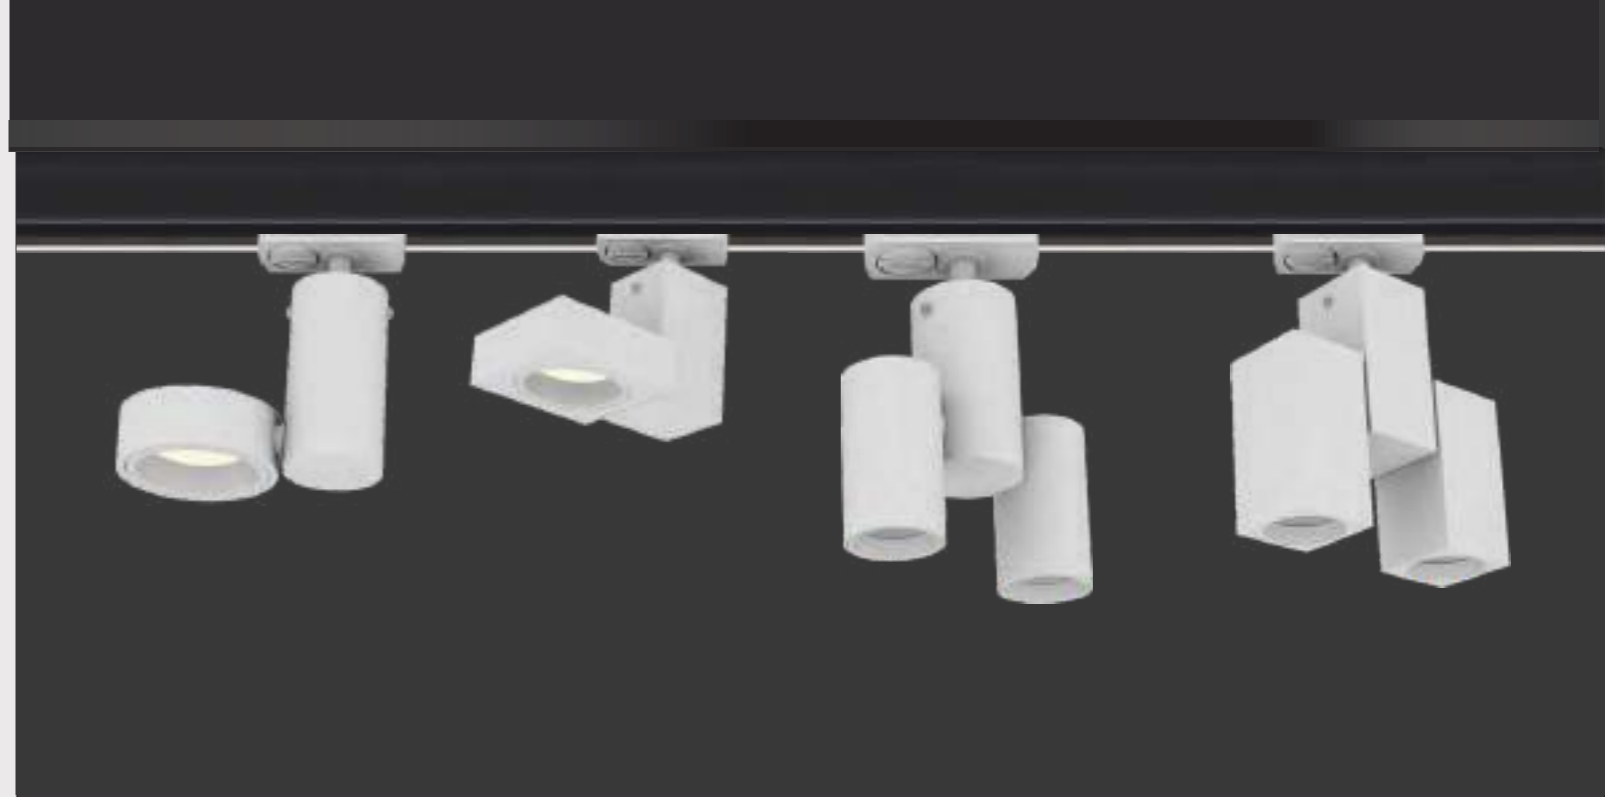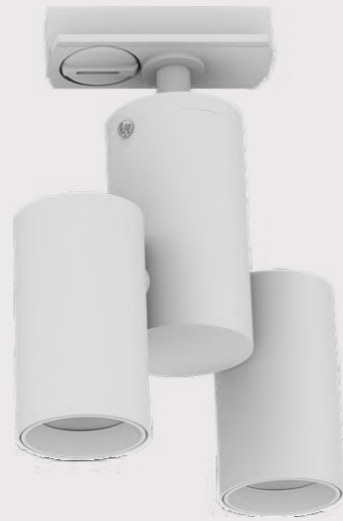

Housing Color



CE CB RoHS DVE SAA BIS




## DETAILS




### DATA SHEET

Wattage	7W/9W/14W/18W
Lumen Flux	80LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Store/Office/Hotel
Dimming Option	TRIAC/0-10V/DALI2


LD-01-52701




LD-01-52821

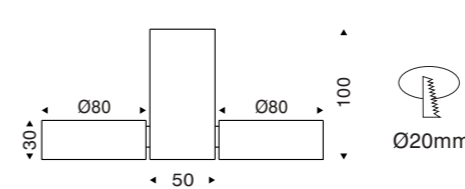


LD-01-52731




LD-11-52731

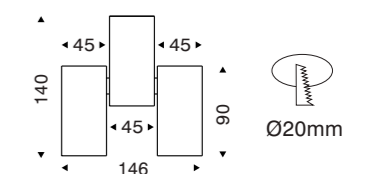

### Luminous Intensity Distribution Curve

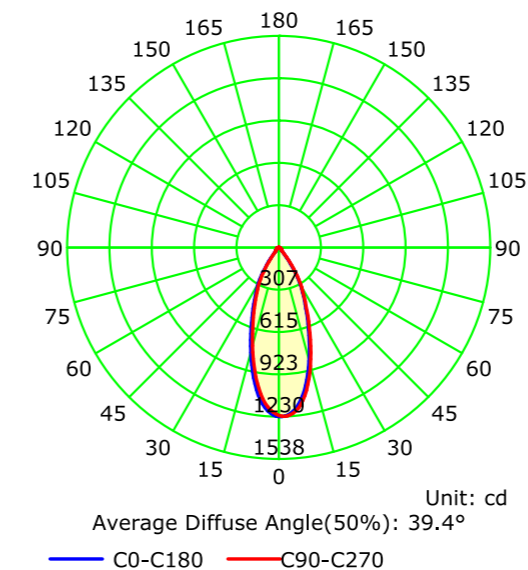


### Illuminance at a Distance

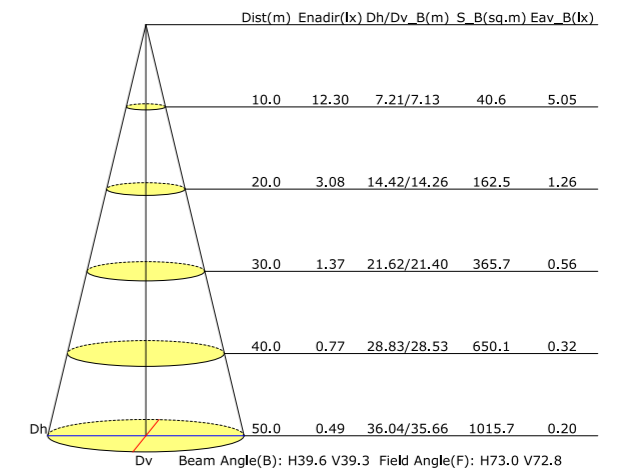

## SIREN SERIES

### LD-01-500

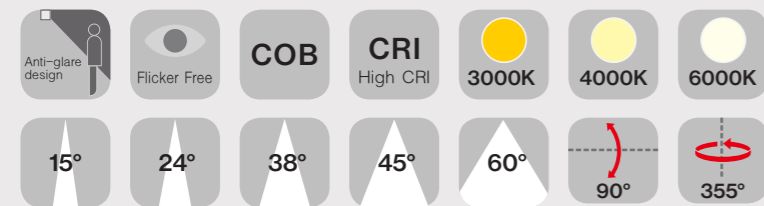


Solid forged aluminum creates a durable texture with deep paint on the lamp body. Effective focusing angle specially designed for background wall lighting

Housing Color

WHITE
  BLACK
  GOLD

CE CB RoHS BIS

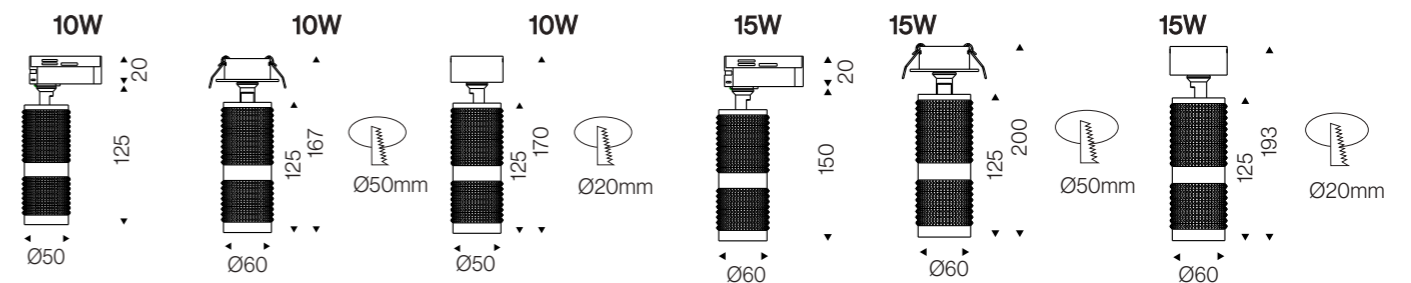


## DETAILS




### DATA SHEET

Wattage	10W/15W
Lumen Flux	70LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### Luminous Intensity Distribution Curve

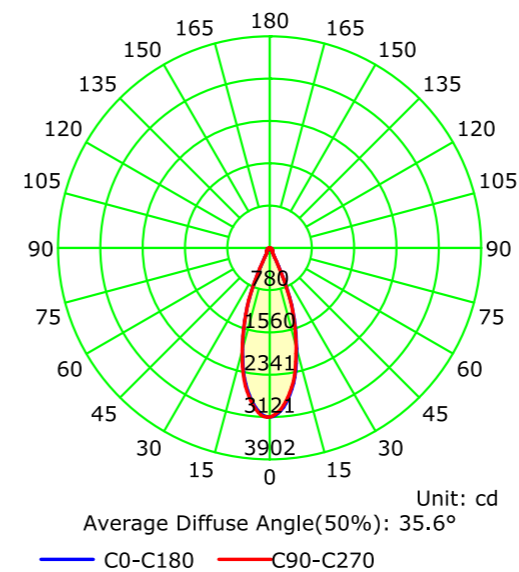


### Illuminance at a Distance

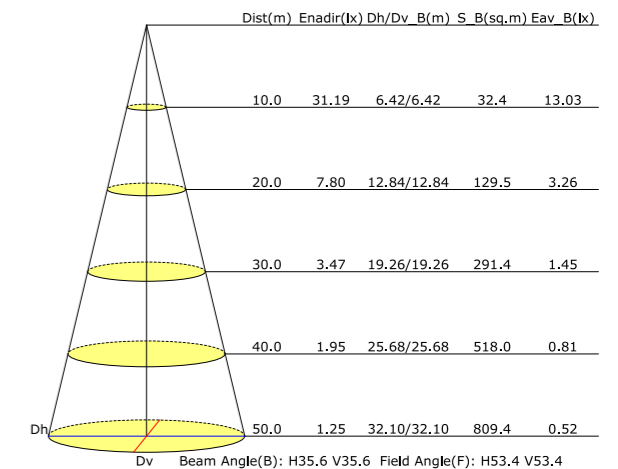



# LED TRACK LIGHTS

## LD-01-506

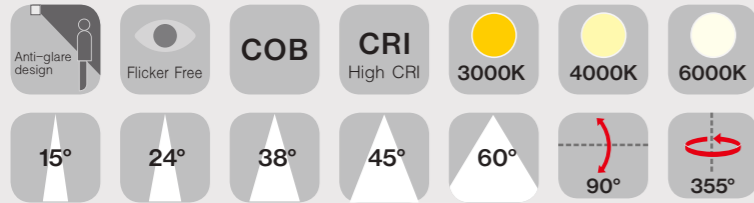

A simplified choice in the wide world of lighting, this is guaranteed to meet all of your essential lighting needs, while delivering a complete package in design, performance and value.



- Housing Color:  WHITE  BLACK
- Inner rings color:  WHITE  BLACK




CE CB RoHS BIS

### DETAILS




#### DATA SHEET


Wattage	7W/12W/18W/30W/32W
Lumen Flux	85LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

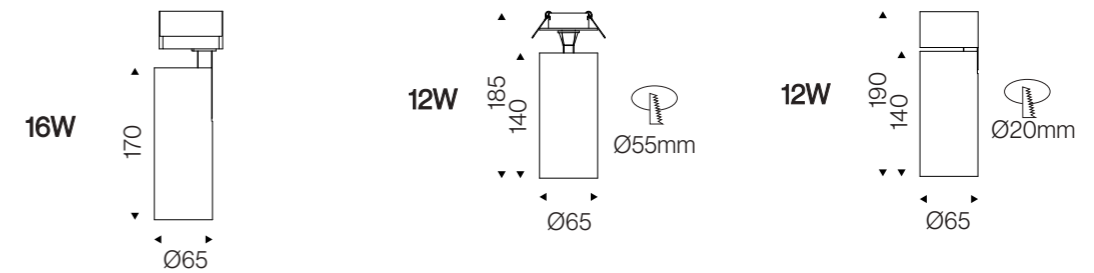

#### Luminous Intensity Distribution Curve

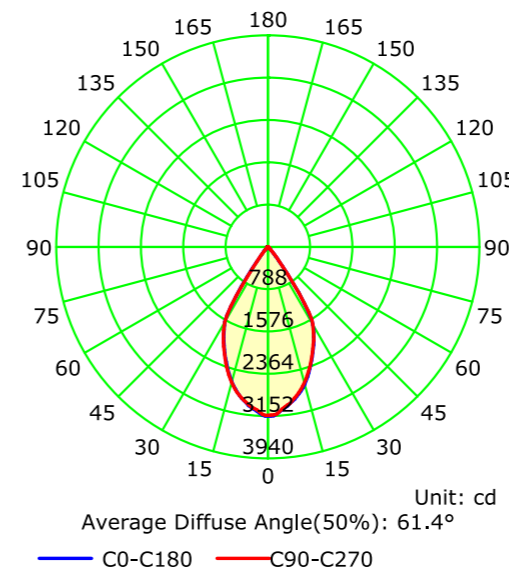


#### Illuminance at a Distance

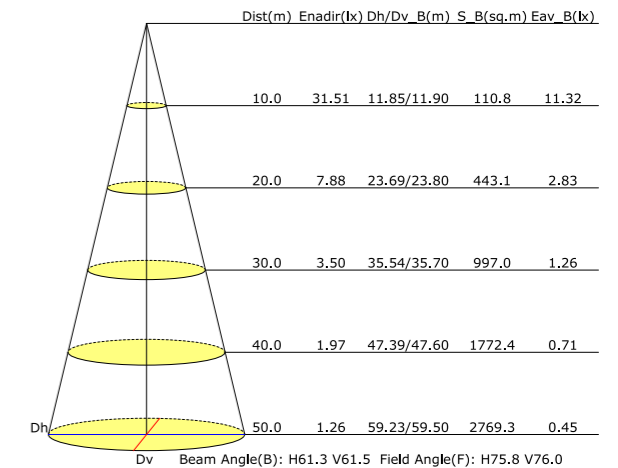

## LED TRACK LIGHTS

### LD-01-525

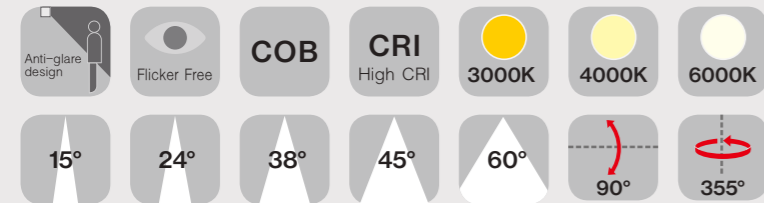

Utilizing a unique focusing method with telescopic zoom, this lighting solution employs Fresnel lens optics, ensuring a superior light-gathering effect. The spot effect is soft, and the transition between spots is even.

Housing Color  WHITE  BLACK

CE CB RoHS BIS



## DETAILS




### DATA SHEET


Wattage	12W/20W/30W/40W
Lumen Flux	85LM/W
Housing Color	White/Black
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2




LD-01-52501

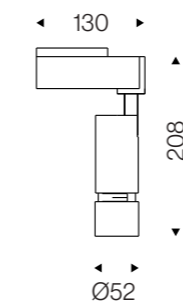


LD-01-52502

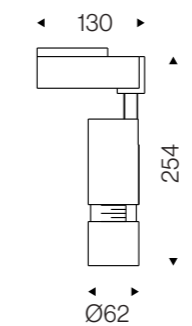


LD-01-52503

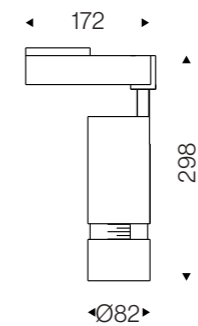


LD-01-52504

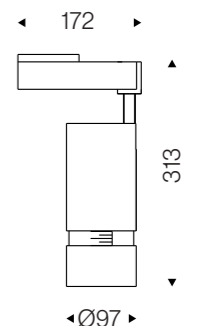

### Luminous Intensity Distribution Curve

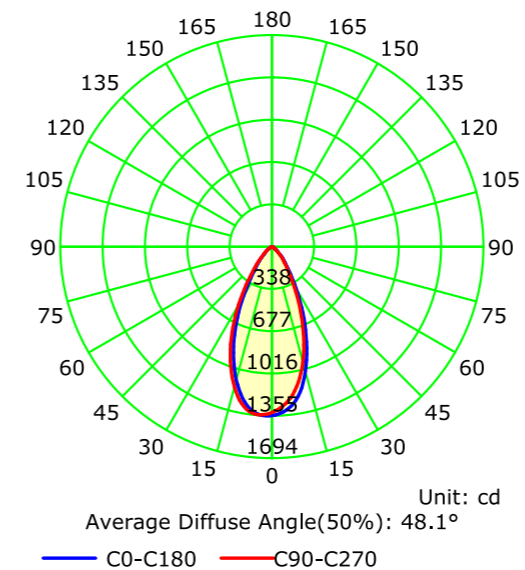

### Illuminance at a Distance

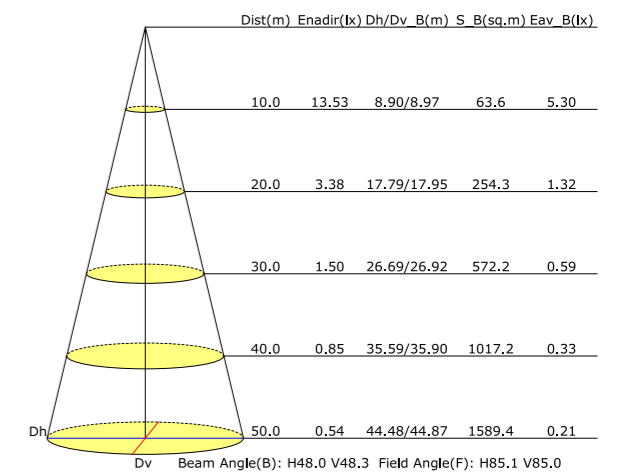



## LD-01-533





### DATA SHEET

Wattage	7W/12W/18W/30W
Lumen Flux	95LM/W
Color Temperature	3000K/4000K/6000K
Beam angle	15-60°
Product Color	White/Black
LED Light Source	Bicolor COB
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS   BIS



## LD-01-583




### DATA SHEET

Wattage	8W/15W/25W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam angle	15-60°
Product Color	White/Black
LED Light Source	Bicolor COB
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS   BIS

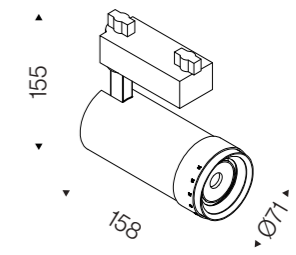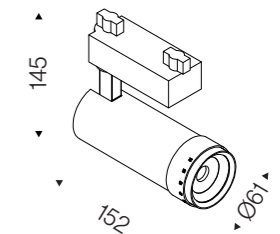





## LD-01-706




### DATA SHEET

Wattage	10W/20W/30W
Lumen Flux	80LM/W
Color Temperature	3000K-4200K-6000K
Beam angle	15°/24°/36°
Product Color	White/Black
LED Light Source	COB
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

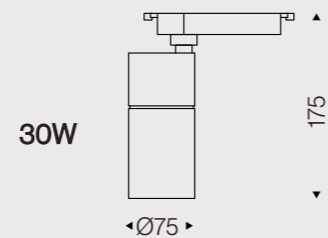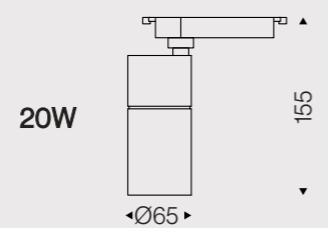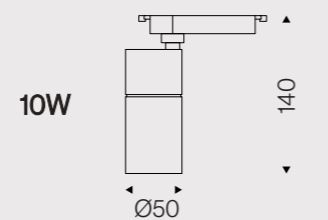

## LD-01-626



### DATA SHEET

Wattage	10W/18W
Lumen Flux	95LM/W
Color Temperature	3000K/4000K/6000K
Beam angle	24°/38°/45°/60°
Product Color	White/Black
LED Light Source	COB
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

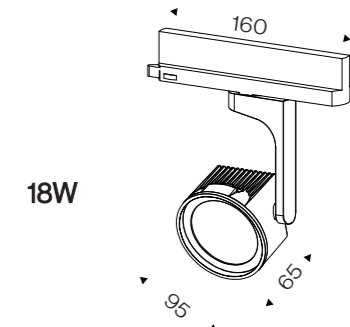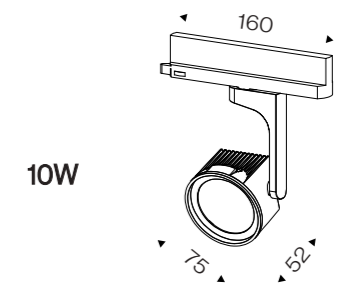



## LD-01-656


### DATA SHEET

Wattage	18W
Lumen Flux	1480LM
Color Temperature	3000K/4000K/6000K
Beam angle	20°/30°
Product Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

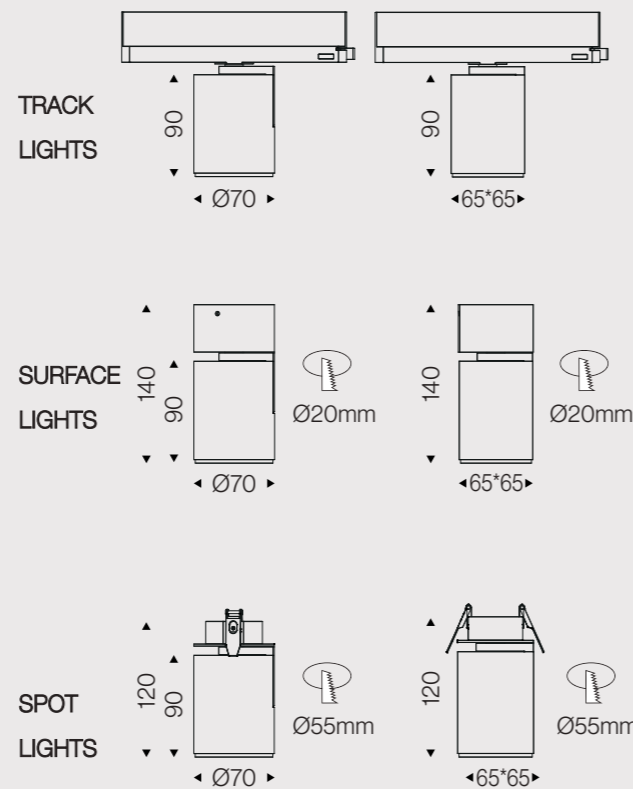

## LD-01-801


### DATA SHEET

Wattage	25W/30W/35W
Lumen Flux	75LM/W
Color Temperature	3000K/4000K/6000K
Beam angle	15°/23°/38°/45°/60°
Product Color	White/Black
LED Light Source	Bicolor COB
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

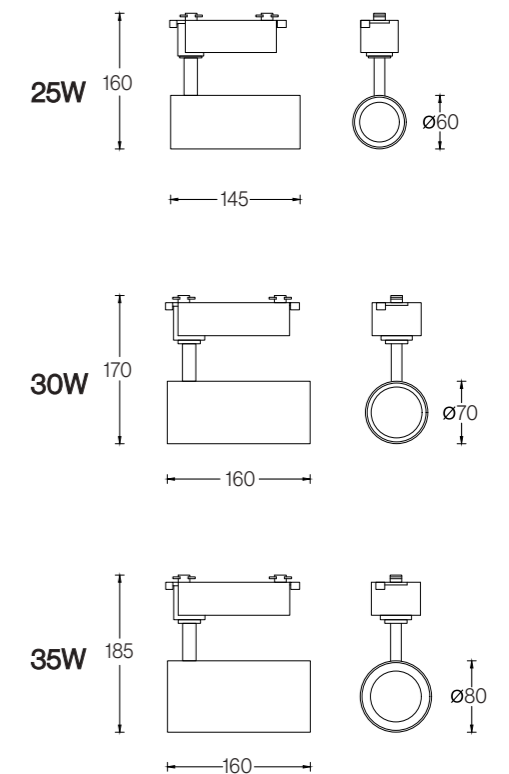



**LED DOWNLIGHT**

**Technical light**



Cooperative brand:





## LD-03-215






### DATA SHEET

Wattage	10W/15W/20W
Lumen Flux	88LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White&Black/White&Grey
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

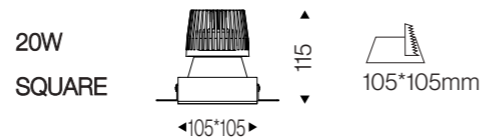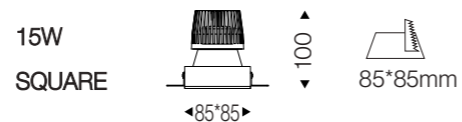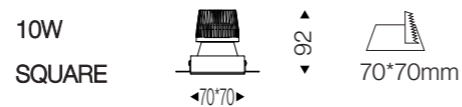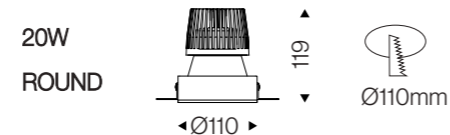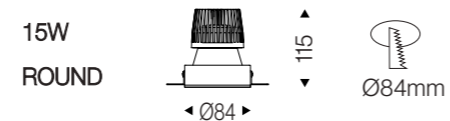

## LD-03-230




### DATA SHEET

Wattage	5W/10W/15W
Lumen Flux	85LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

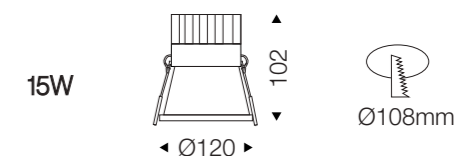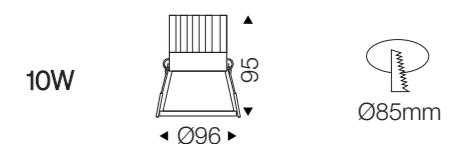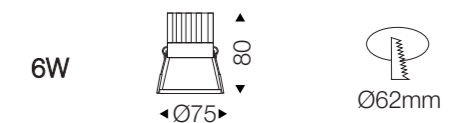



## LD-03-343




### DATA SHEET

Wattage	5W/10W/15W
Lumen Flux	87LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/23°/38°
Housing Color	White/Black
Inner Ring Color	Black/Gold
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

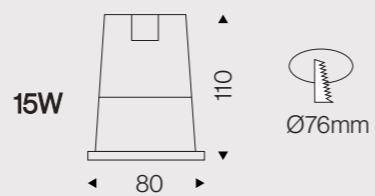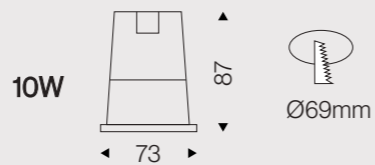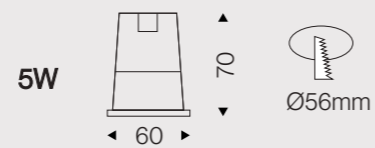

## LD-03-412





### DATA SHEET

Wattage	7W/12W/18W/24W
Lumen Flux	90LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	110°
Housing Color	White
LED Light Source	SMD
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

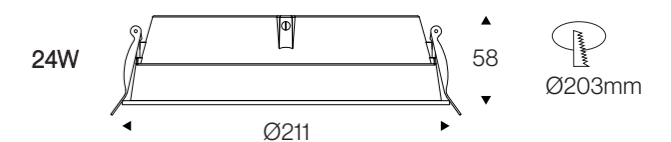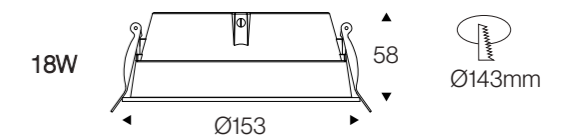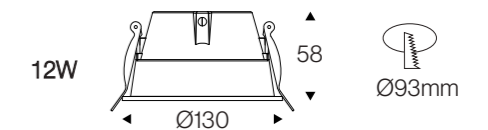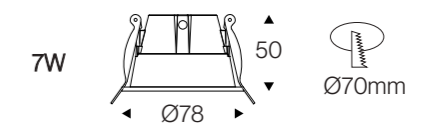






## LD-03-413




### DATA SHEET

Wattage	6W/12W/18W/24W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

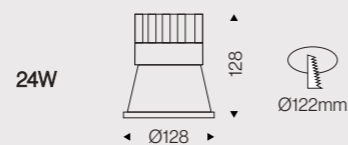

## LD-03-447




### DATA SHEET

Wattage	12W/18W/24W
Lumen Flux	85LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	38°
Housing Color	White/Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS




CE CB RoHS BIS

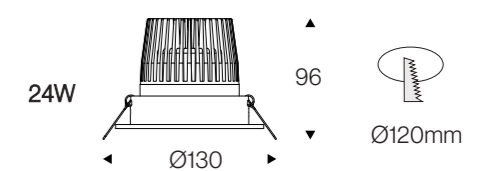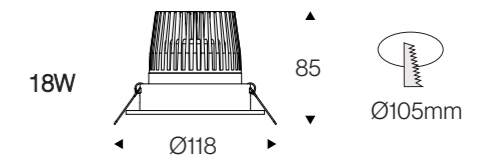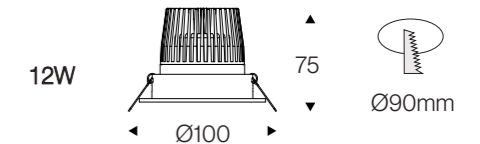



## LED DOWNLIGHT

### LD-03-453

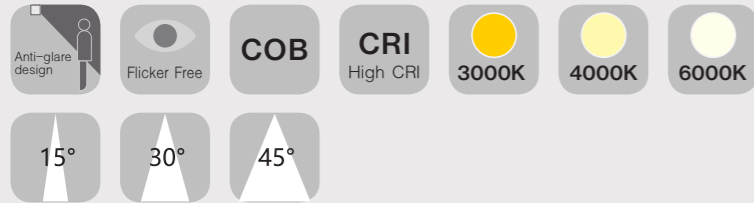

Recessed luminaire is specifically designed to meet the dynamic specifications of commercial spaces and high-end residential areas., features a deep concave design that effectively reduces anti-glare values, ensuring optimal efficiency, and providing maximum visual comfort for various settings.

CE CB RoHS BIS




## DETAILS




### DATA SHEET


Wattage	7W/12W/18W
Lumen Flux	70LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Bedroom/Office/Living room
Dimming Option	TRIAC/0-10V/DALI2

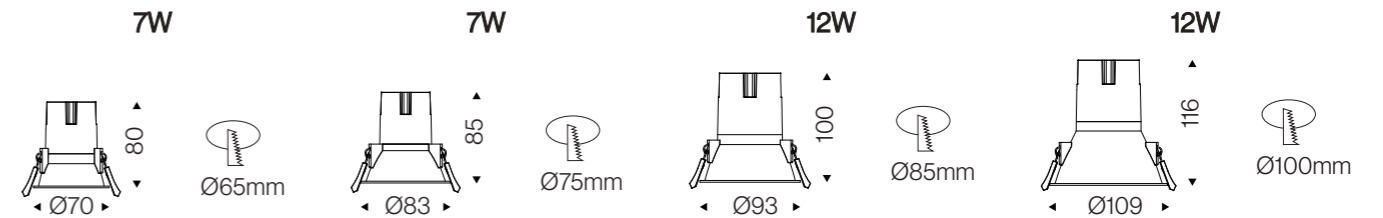

### Luminous Intensity Distribution Curve

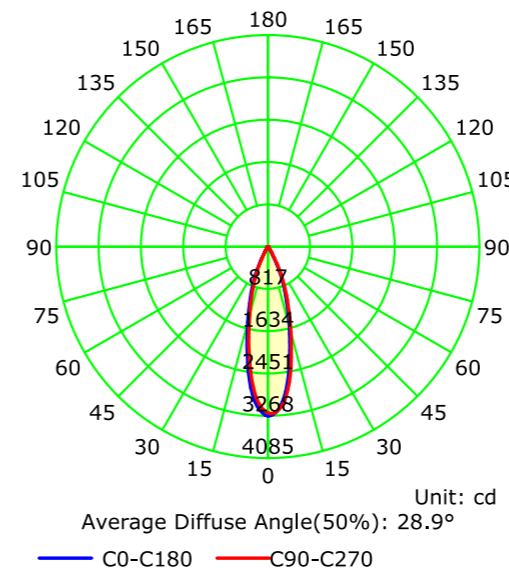


### Illuminance at a Distance

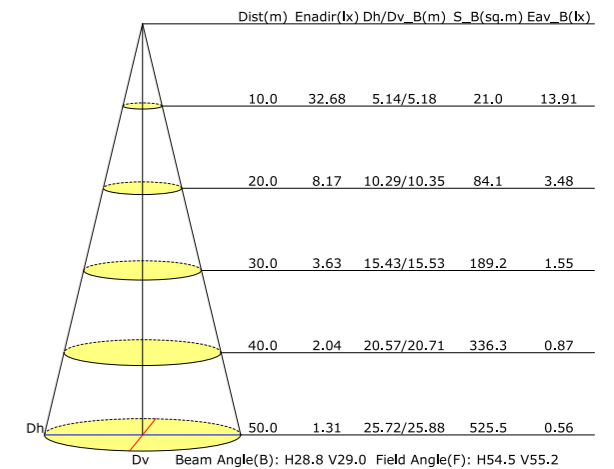

## LED DOWNLIGHT

### LD-03-457

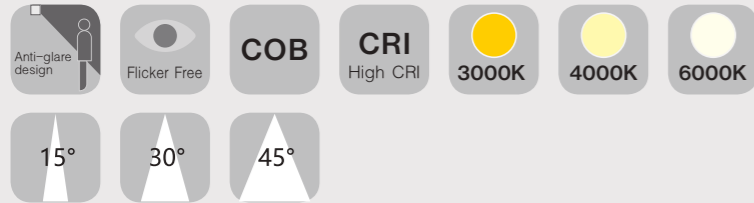

Easy to install and replaced the reflective cups, and the pin-type heat sink provides efficient heat dissipation performance. Available in a variety of size and power options, provides optimal efficiency and maximum visual comfort to meet the needs of different occasions.

Housing Color



Inner rings color:



CE CB RoHS BIS




## DETAILS




### DATA SHEET

Wattage	7W/15W/20W/30W
Lumen Flux	90LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Store/Office/Hotel
Dimming Option	TRIAC/0-10V/DALI2

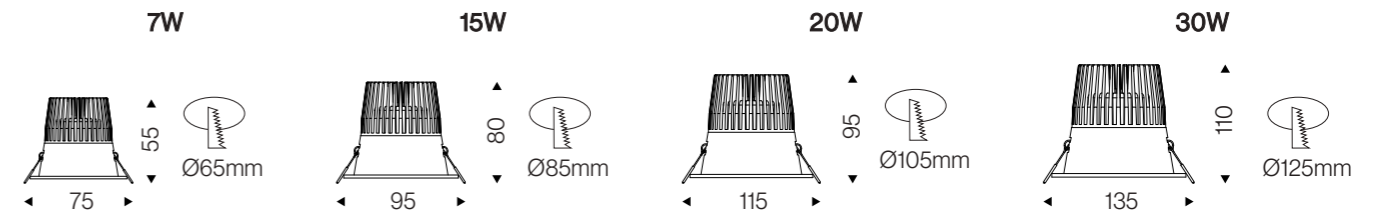

### Luminous Intensity Distribution Curve

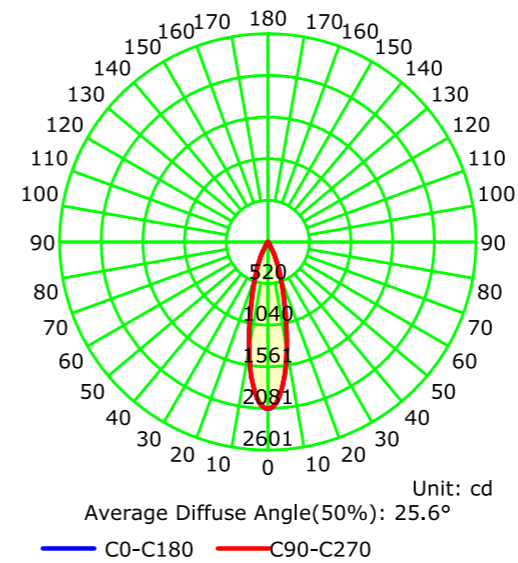



### Illuminance at a Distance

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(lx)
1.0	2081.54	0.45/0.45	0.2	997.87
2.0	520.39	0.91/0.91	0.7	249.47
3.0	231.28	1.36/1.36	1.5	110.87
4.0	130.10	1.82/1.82	2.6	62.37
5.0	83.26	2.27/2.27	4.1	39.91
6.0	57.82	2.73/2.73	5.9	27.72
7.0	42.48	3.18/3.18	8.0	20.36
8.0	32.52	3.64/3.64	10.4	15.59
9.0	25.70	4.09/4.09	13.2	12.32
10.0	20.82	4.55/4.55	16.3	9.98

Dv Beam Angle(B): H25.6 V25.6 Field Angle(F): H52.4 V52.4

## LED DOWNLIGHT

### LD-03-569

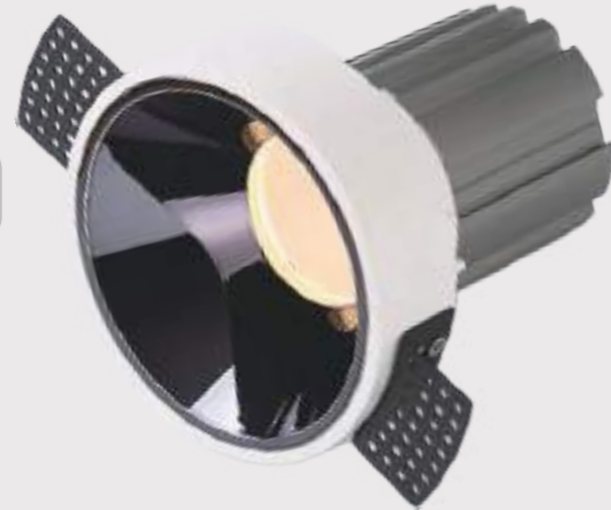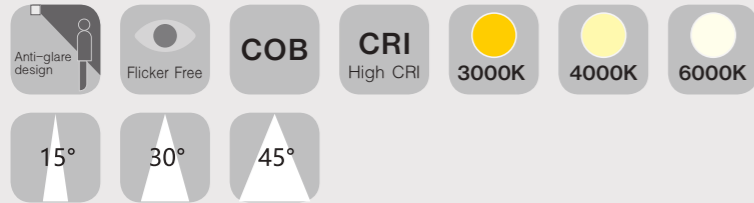

Experience cutting-edge design, outstanding heat dissipation, and adaptable anti-glare features with the Trimess LED Downlight, setting a new standard in versatile and high-performance lighting solutions.

CE CB RoHS BIS

Housing Color: WHITE BLACK

Inner rings color: WHITE BLACK GOLD CHROME



## DETAILS




### DATA SHEET

Wattage	10W/15W
Lumen Flux	80LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Bedroom/Office/Living room
Dimming Option	TRIAC/0-10V/DALI2



### Luminous Intensity Distribution Curve

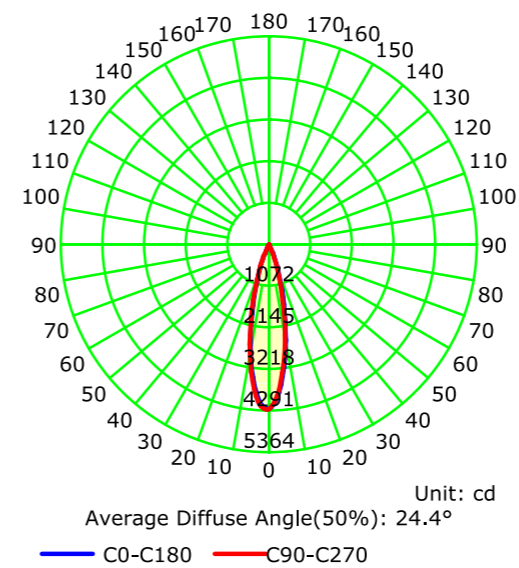

### Illuminance at a Distance

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	4244.66	0.43/0.43	0.1	2153.02
2.0	1061.17	0.87/0.86	0.6	538.25
3.0	471.63	1.30/1.29	1.3	239.22
4.0	265.29	1.74/1.72	2.4	134.56
5.0	169.79	2.17/2.15	3.7	86.12
6.0	117.91	2.60/2.58	5.3	59.81
7.0	86.63	3.04/3.01	7.2	43.94
8.0	66.32	3.47/3.44	9.5	33.64
9.0	52.40	3.91/3.87	12.0	26.58
10.0	42.45	4.34/4.30	14.8	21.53

Dv Beam Angle(B): H24.5 V24.3 Field Angle(F): H45.9 V45.4






## LD-03-560


### DATA SHEET

Wattage	9W/15W/24W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	110°
Housing Color	White
LED Light Source	SMD
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

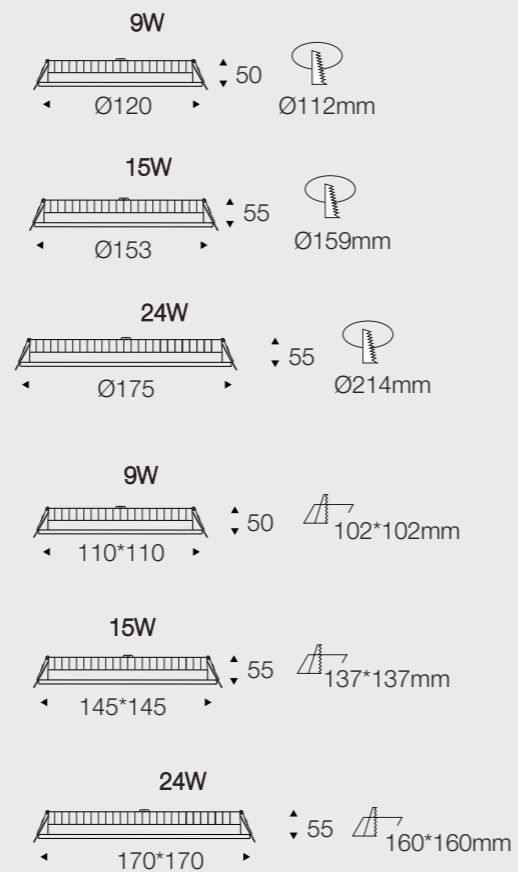

## LD-03-582


### DATA SHEET

Wattage	8W/15W/24W/35W/45W
Lumen Flux	97LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24/55°
Housing Color	White/Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

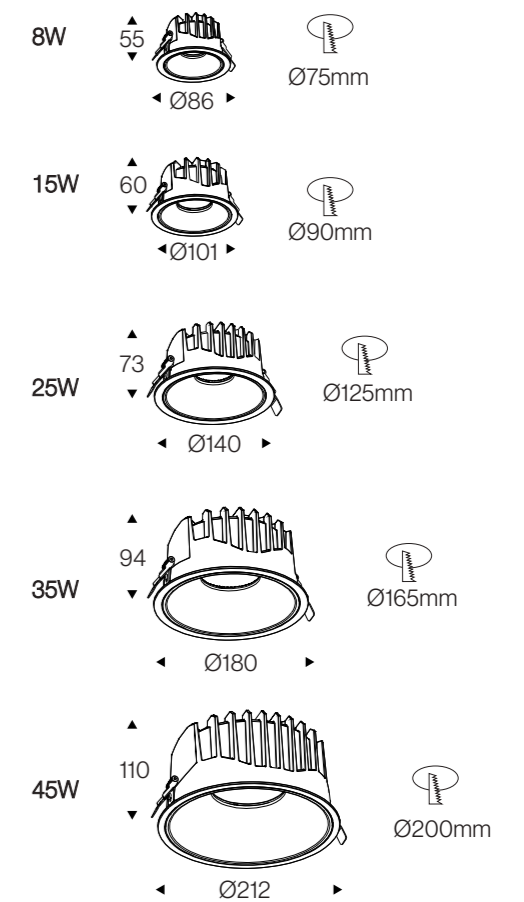



## LD-03-571


### DATA SHEET

Wattage	12W/18W/24W
Lumen Flux	85LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	38°
Housing Color	White/Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

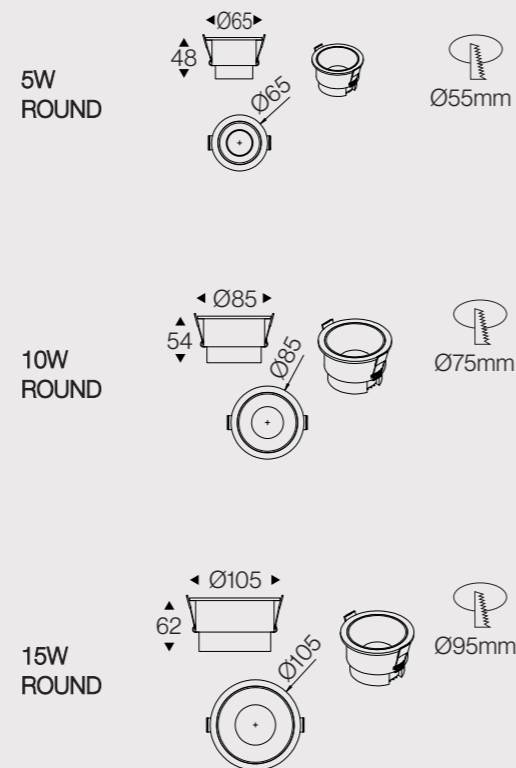

## LD-03-572


### DATA SHEET

Wattage	10W/15W/20W
Lumen Flux	88LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White&Black/White&Grey
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

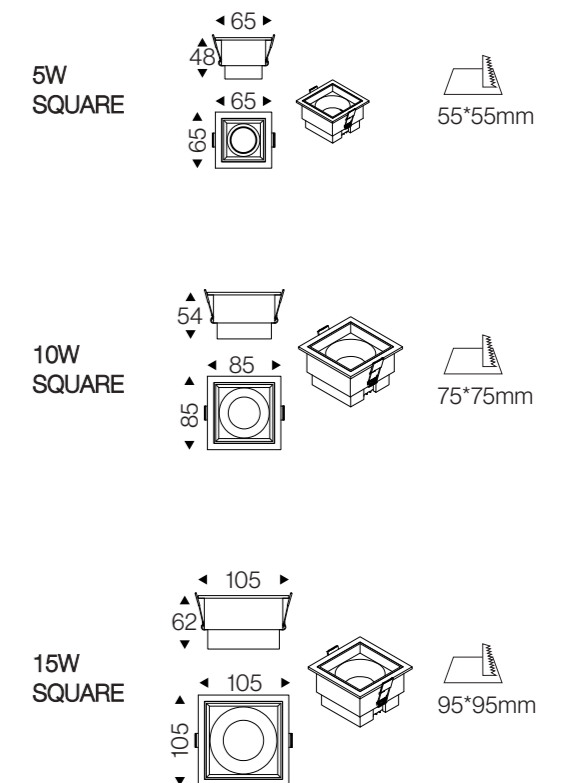



## LD-03-719



### DATA SHEET

Wattage	12W/18W/24W
Lumen Flux	85LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	38°
Housing Color	White/Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

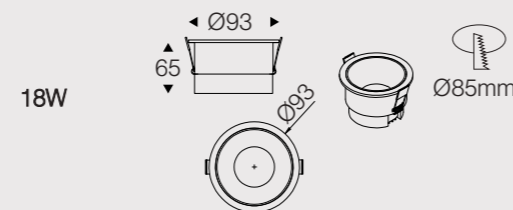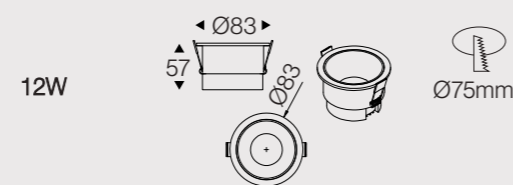

## LD-03-729




### DATA SHEET

Wattage	7W/15W/20W
Lumen Flux	75LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

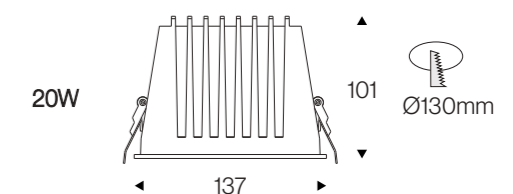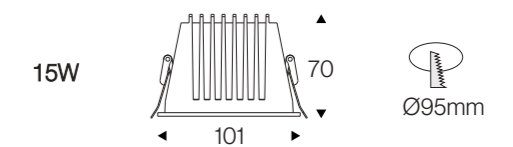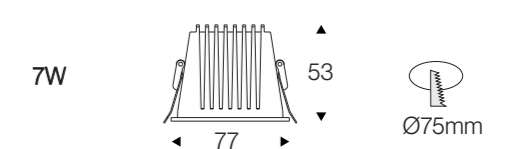






## LD-03-730

CE CB RoHS BIS

### DATA SHEET

Wattage	7W/15W/20W
Lumen Flux	75LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

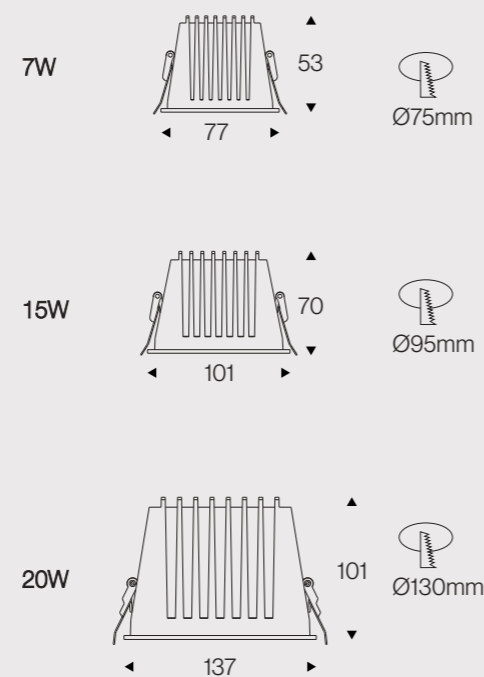


## LD-03-731

CE CB RoHS BIS

### DATA SHEET

Wattage	7W/12W/18W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

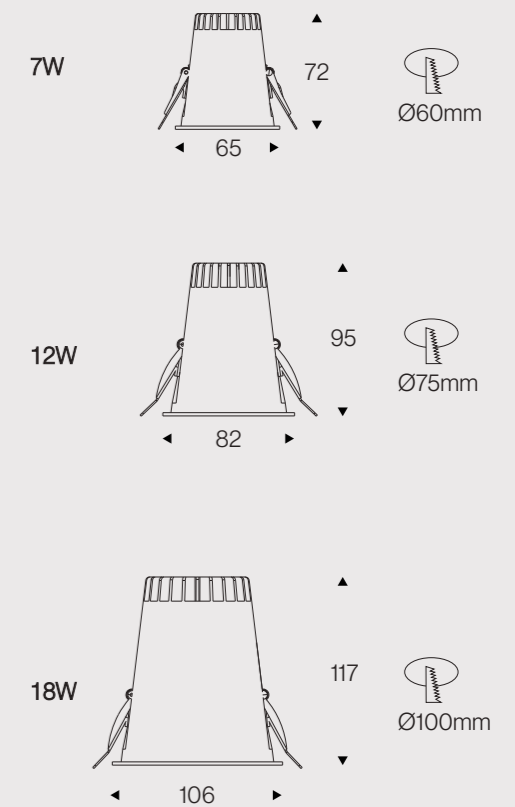



## LD-03-732




### DATA SHEET

Wattage	5W/10W/15W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	Gun Black
LED Light Source	COB
Application	Bedroom/Living room/Office
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS   BIS

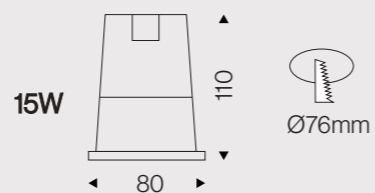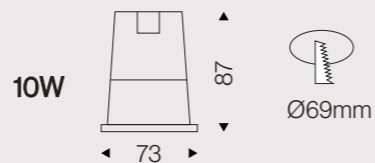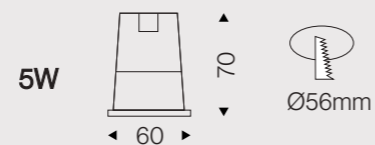

## LD-03-733



### DATA SHEET

Wattage	10W/15W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	Gun Black
LED Light Source	COB
Application	Bedroom/Living room/Office
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS   BIS

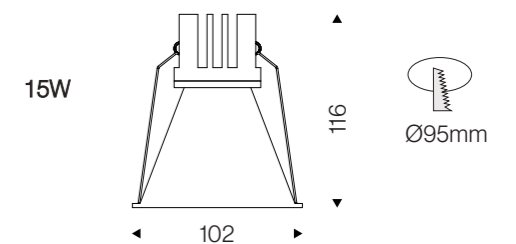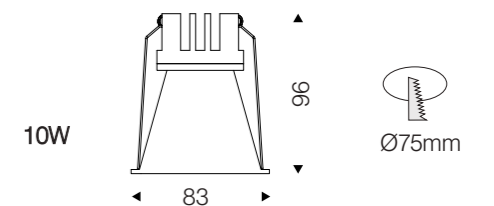



## LD-03-734


### DATA SHEET

Wattage	5W/10W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°
Housing Color	White
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

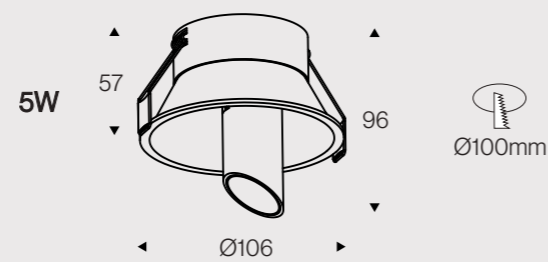

## LD-03-736


### DATA SHEET

Wattage	10W
Lumen Flux	75LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	White&Grey
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

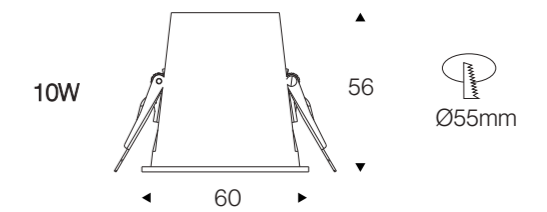





## LD-03-790



### DATA SHEET

Wattage	5W/7W/12W
Lumen Flux	40LM/W
Color Temperature	3000K/4000K
Beam Angel	110°
Housing Color	White
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

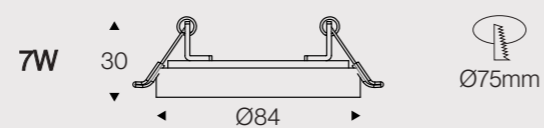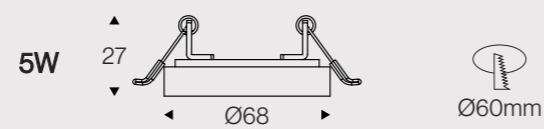

## LD-03-791




### DATA SHEET

Wattage	5W/7W/12W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

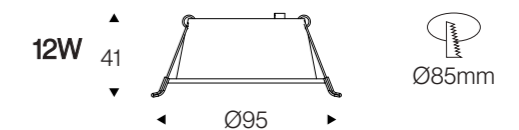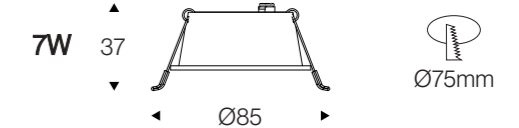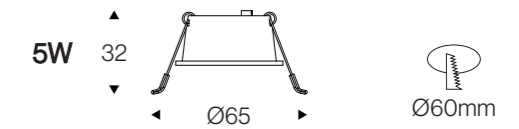



## LD-03-792



### DATA SHEET

Wattage	7W/12W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K
Beam Angel	24°/36°
Housing Color	White
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS


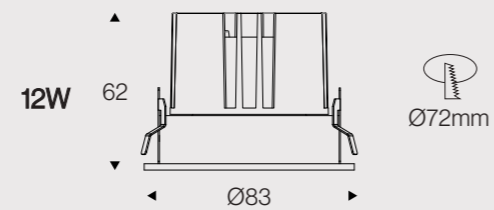
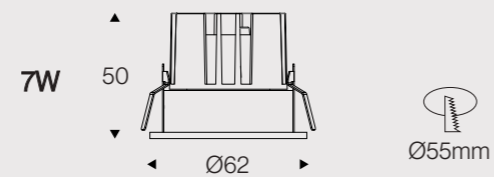


## LD-03-793



### DATA SHEET

Wattage	7W/12W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K
Beam Angel	24°/36°
Housing Color	White&Glod
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

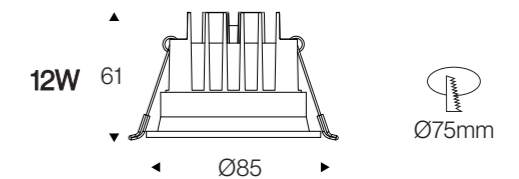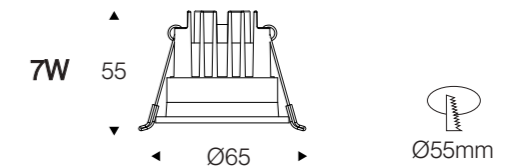






## LD-03-794

CE CB RoHS   BIS

### DATA SHEET

Wattage	5W/7W/12W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K
Beam Angel	24°/36°
Housing Color	White
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

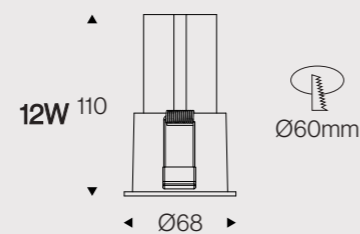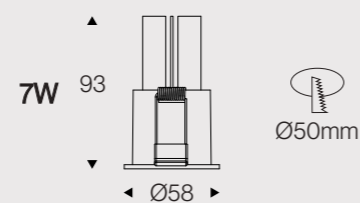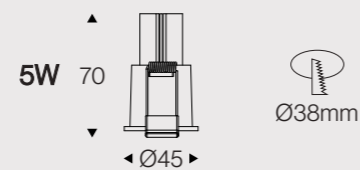



CE CB RoHS   BIS

## LD-03-795

### DATA SHEET

Wattage	7W/12W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K
Beam Angel	24°/36°
Housing Color	Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

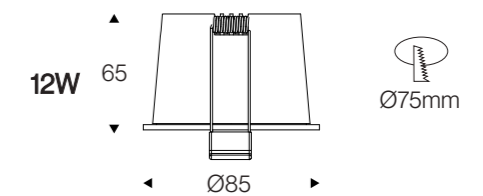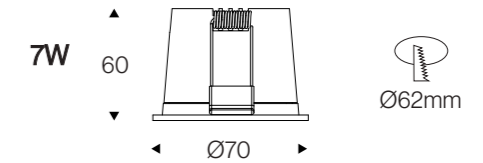






## LD-03-796

CE CB RoHS BIS

### DATA SHEET

Wattage	7W/12W/18W
Lumen Flux	40LM/W
Color Temperature	3000K/4000K
Beam Angel	110°
Housing Color	White
LED Light Source	SMD
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

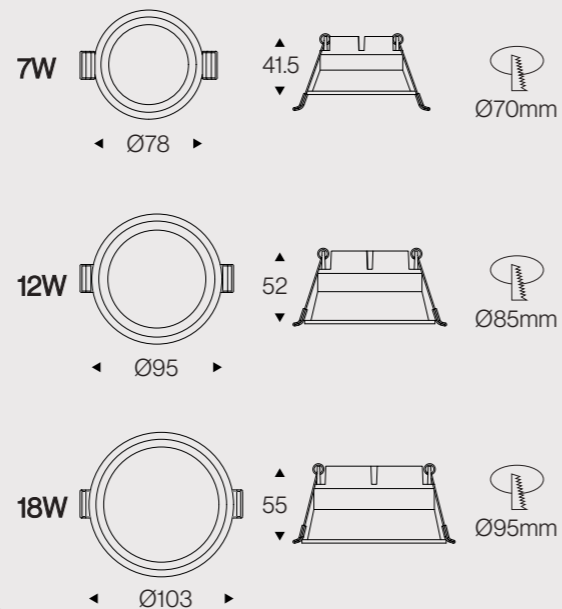


## LD-03-797

CE CB RoHS BIS

### DATA SHEET

Wattage	5W/7W/12W/18W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K
Beam Angel	110°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

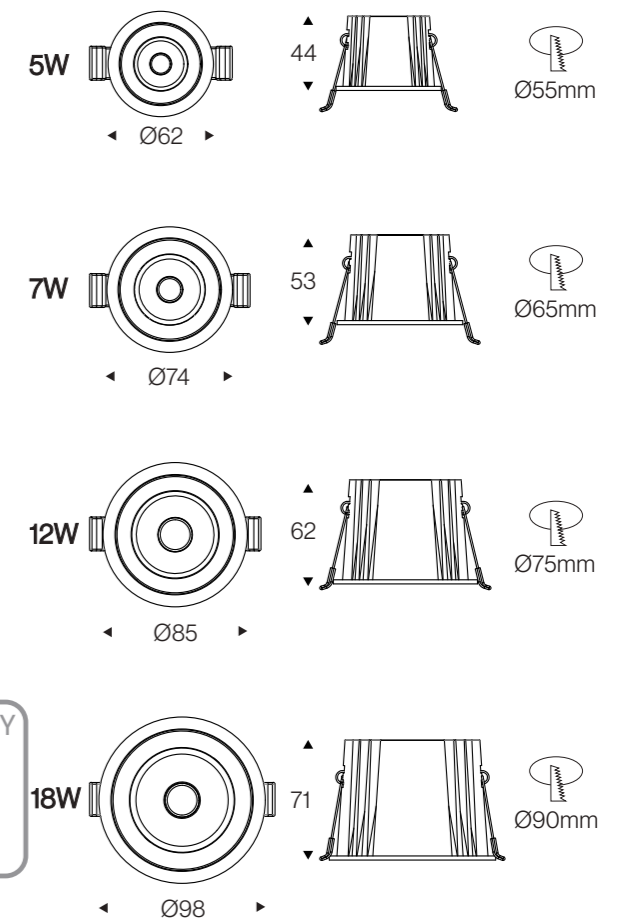





## LD-03-798

CE CB RoHS BIS

### DATA SHEET

Wattage	7W/12W
Lumen Flux	40LM/W
Color Temperature	3000K/4000K
Beam Angel	24°/36°
Housing Color	Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

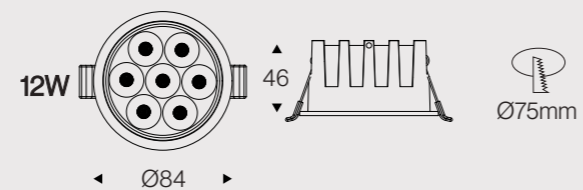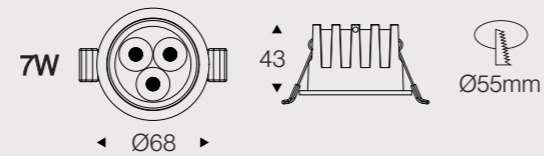

### DETAILS






## LD-03-799


CE CB RoHS BIS

### DATA SHEET

Wattage	5W/7W/12W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K
Beam Angel	24°/36°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

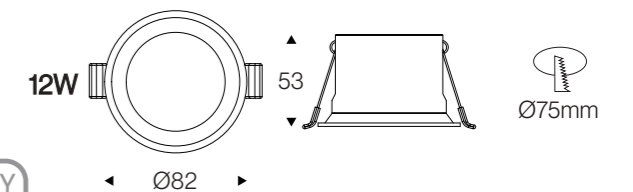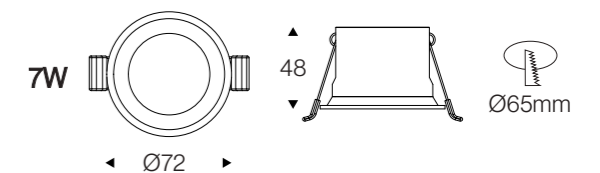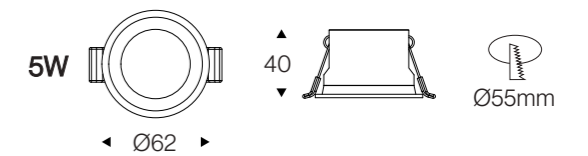

### DETAILS

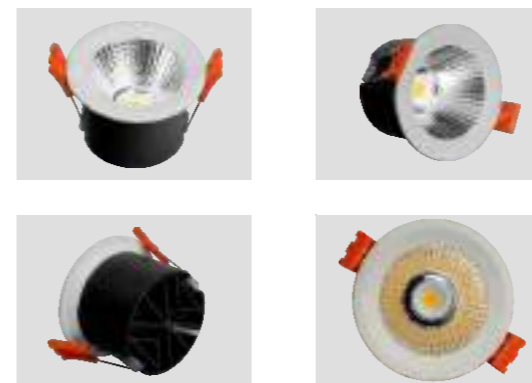



**LED FOOT LIGHTS**

**Technical light**




CE CB RoHS BIS

**LD-07-252**

**DATA SHEET**

Wattage	1W/3W/5W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	30°/50°/60°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel

**DETAILS**

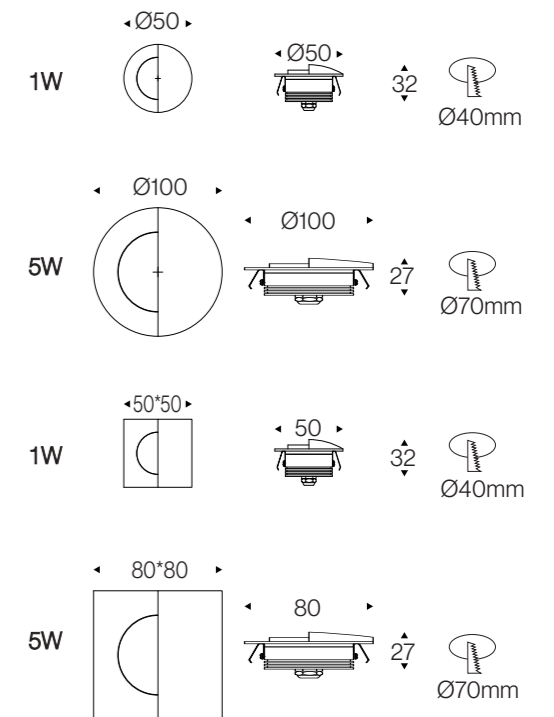

Cooperative brand:







## LD-07-297


### DATA SHEET

Wattage	1W/3W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	30°/60°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel

### DETAILS



CE CB RoHS BIS

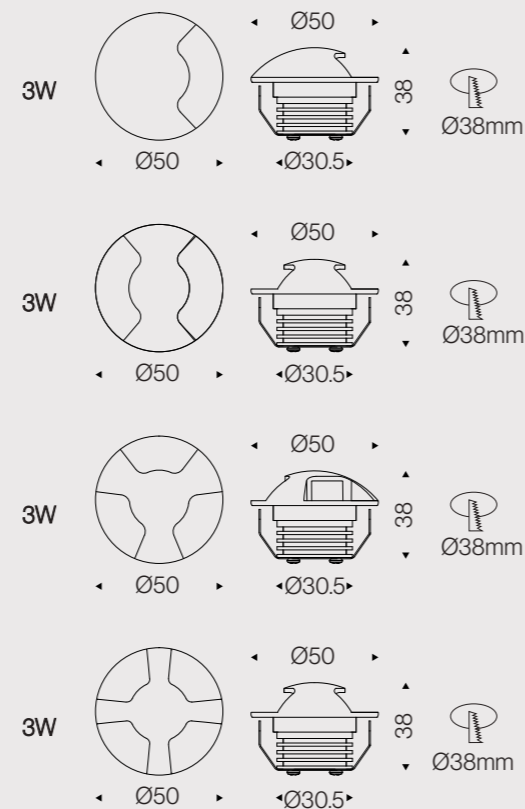

## LD-07-446


### DATA SHEET

Wattage	1W
Lumen Flux	35LM
Color Temperature	3000K/4000K/6000K
Beam Angel	90°
Housing Color	Black/White/Satin nickel
LED Light Source	SMD2835
Application	Home/Office/Store/Hotel

### DETAILS



CE CB RoHS BIS

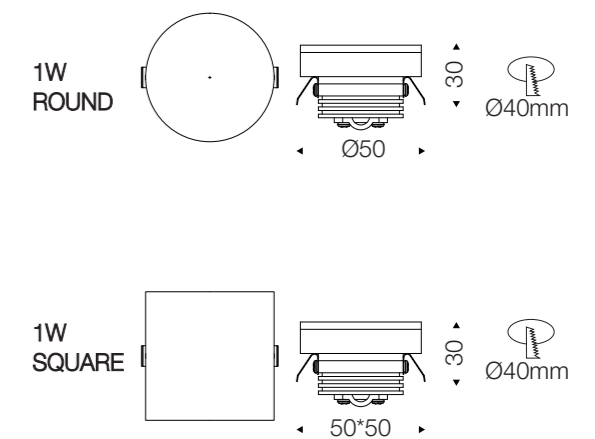





**LED CABINET LIGHTS**

**Technical light**




**LD-07-152**


CE CB RoHS   BIS

**DATA SHEET**

Wattage	1W/3W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	30°/60°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel

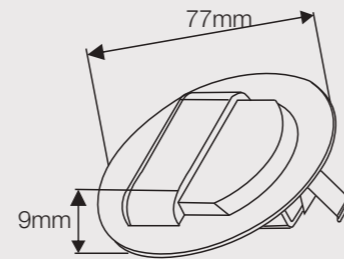

**DETAILS**

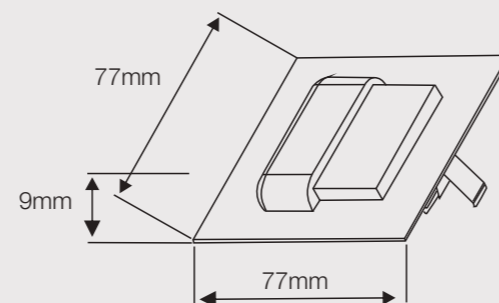

Cooperative brand:






## LD-08-303

CE CB RoHS BIS

### DATA SHEET

Wattage	1W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	30°/60°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel



### DETAILS




## LD-08-304

CE CB RoHS BIS

### DATA SHEET

Wattage	1W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	30°/50°/60°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel

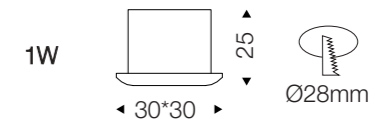

### DETAILS








## LD-08-303


CE CB RoHS   BIS

### DATA SHEET

Wattage	3W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	30°/60°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel

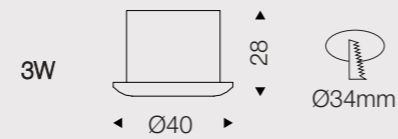

### DETAILS

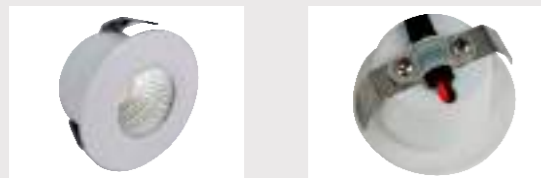


## LD-08-304

CE CB RoHS   BIS

### DATA SHEET

Wattage	3W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	30°/50°/60°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel

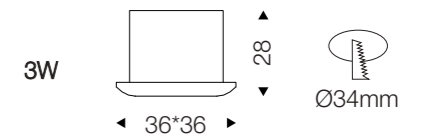

### DETAILS



# LED CABINET LIGHT

## LD-08-674

- Anti-glare design
- Flicker Free
- COB
- CRI High CRI
- 3000K
- 4000K
- 6000K
- 18°
- 60°

OKELI Cabinet Light is meticulously designed to accurately focus light on every corner of your jewelry, making each gem sparkle brilliantly. Utilizing advanced LED technology, it ensures even and natural lighting, enhancing the colors of your jewelry and capturing every intricate detail.



CE CB RoHS BIS

Housing Color: BLACK




### DETAILS




### DATA SHEET

Wattage	2W/2W*2
Lumen Flux	25LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Jewelry Shop/Museum/Exhibition hall

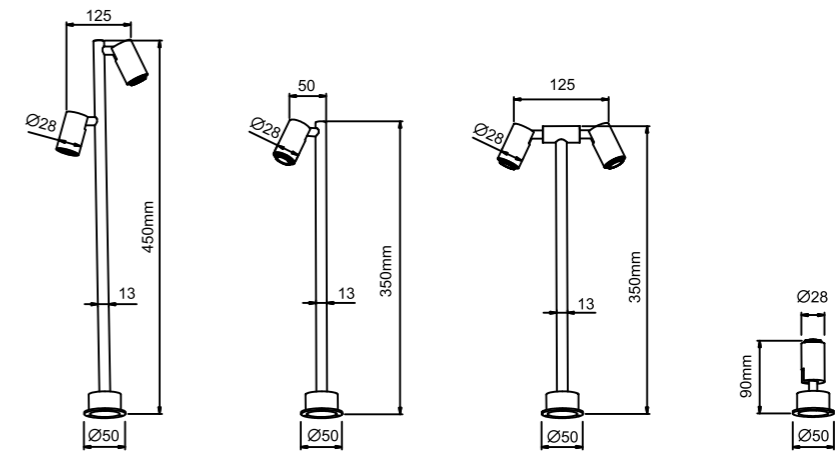

### Luminous Intensity Distribution Curve

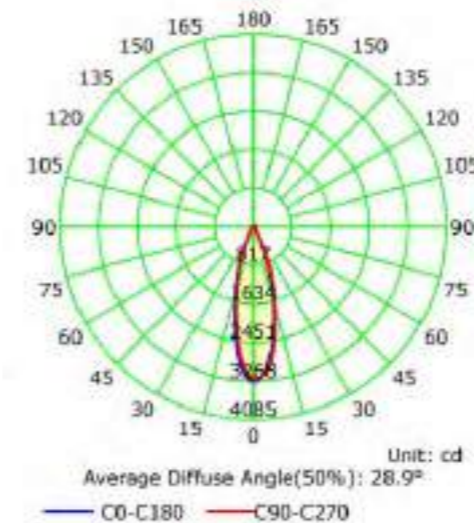

### Illuminance at a Distance





**LED PANEL LIGHTS**

**Technical light**



Cooperative brand:




CE CB RoHS BIS

**LD-09-574&575**

**DATA SHEET**

Wattage	8W/15W/20W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	110°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel


**DETAILS**

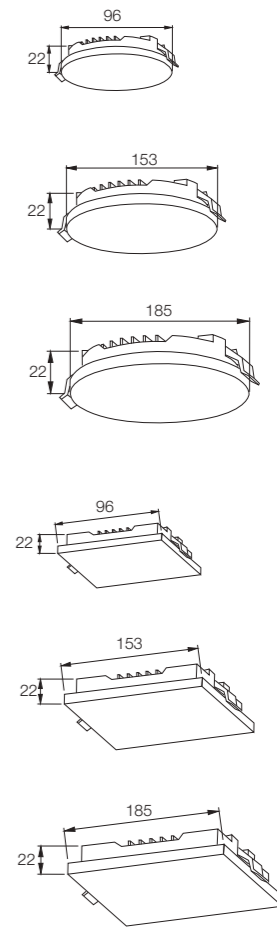



# LED PANEL LIGHTS

## LD-09-232&233

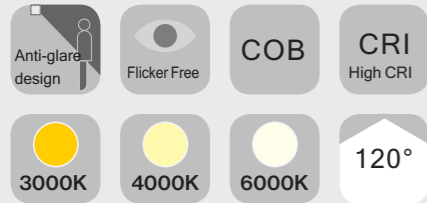

CE CB RoHS BIS




Experience uniform brightness that eliminates shadows, providing a well-lit and comfortable atmosphere in every corner. Whether it's your home, office, or commercial space, the easy installation process ensures a seamless integration of our panel lights into any setting.

### DETAILS




### DATA SHEET


Wattage	8W/12W/22W
Lumen Flux	80LM/W
Housing Color	White&&Grey
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Store/Office/Hotel

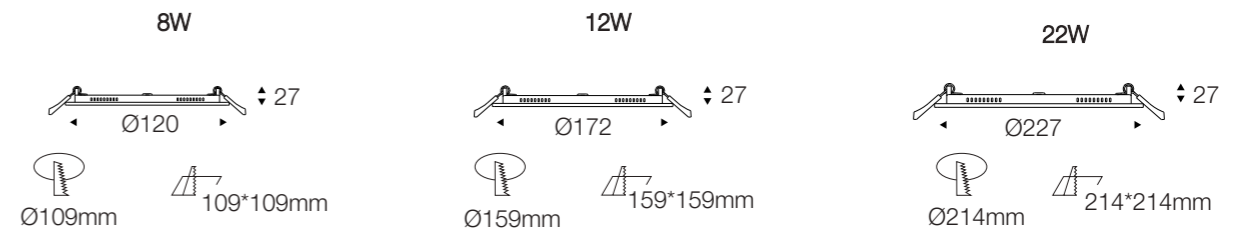

### Luminous Intensity Distribution Curve

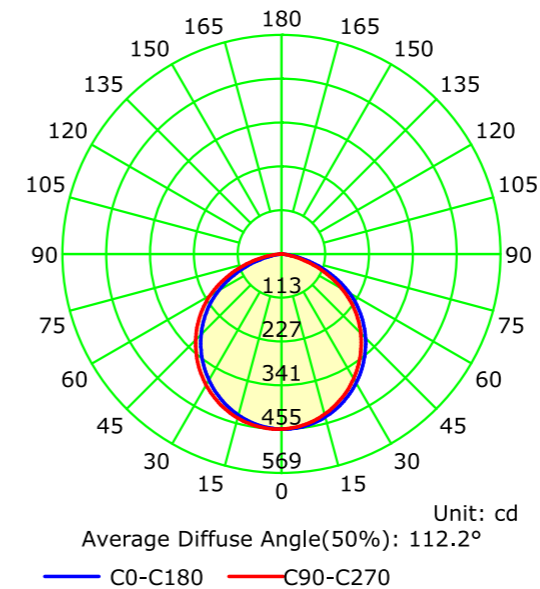

### Illuminance at a Distance

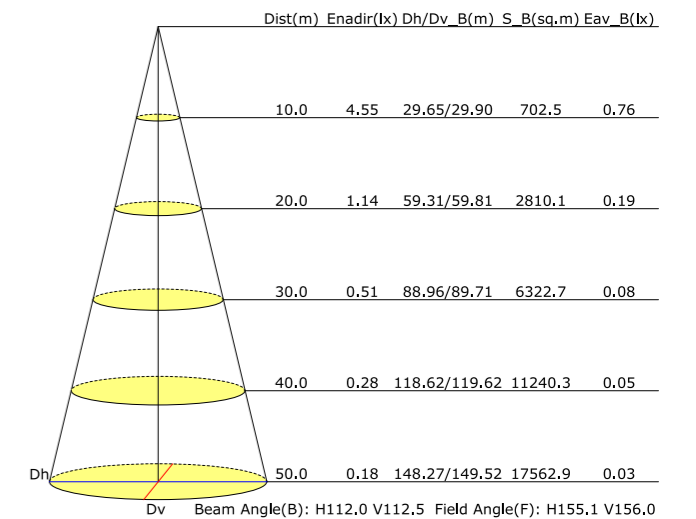




**LED SPOT LIGHTS**

**Technical light**



Cooperative brand:

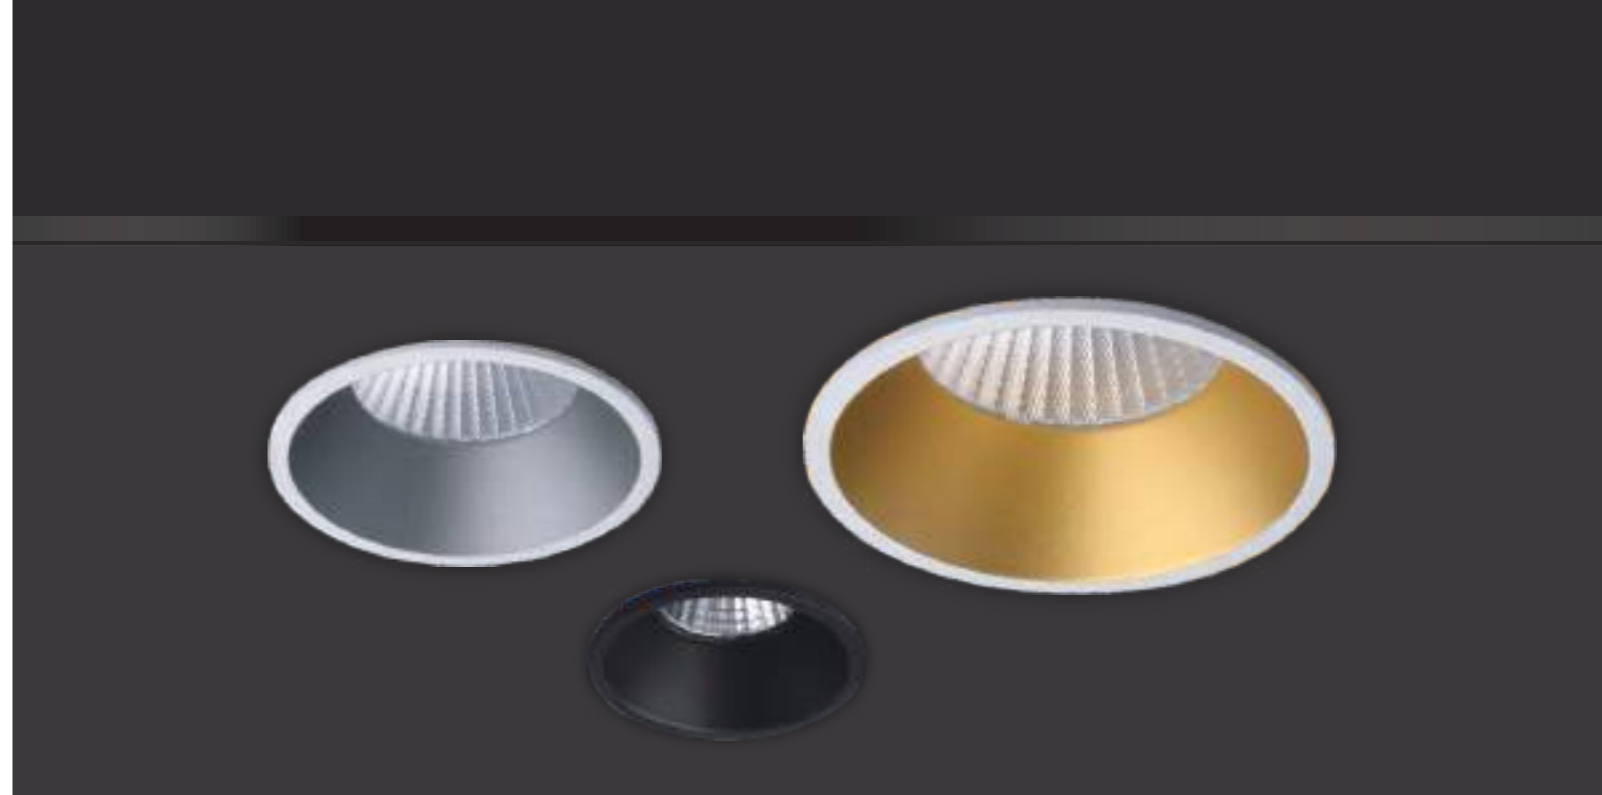


CE CB RoHS BIS

**LD-10-458**

**DATA SHEET**

Wattage	3W/7W/12W/18W
Lumen Flux	110LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15/24/36°
Housing Color	White/Black
Inner Ring Color	White/Black/Gold/Silver
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

**DETAILS**

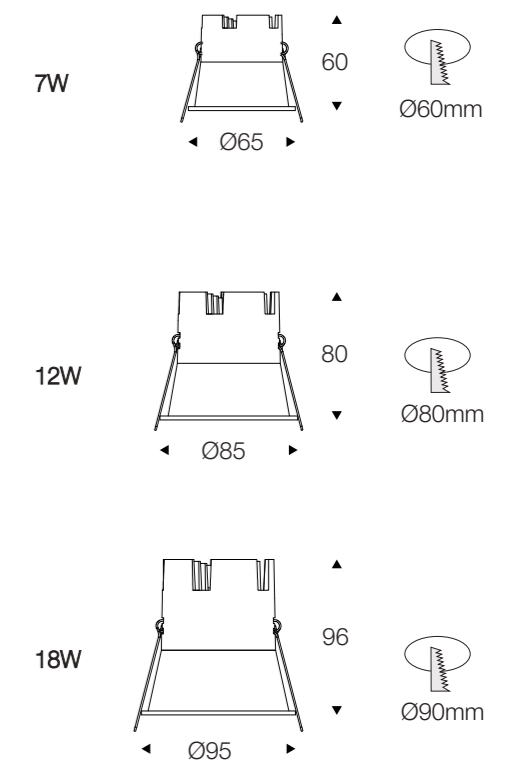



## LD-10-477




### DATA SHEET

Wattage	3W/5W/7W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15/23/38°/45/60°
Housing Color	White&Grey
Inner Ring Color	White/Black/Gold/Silver
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

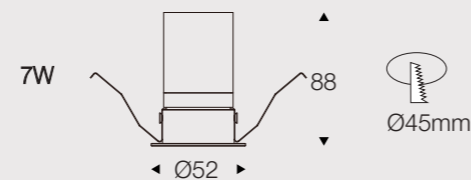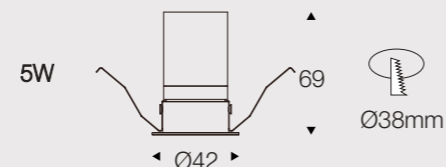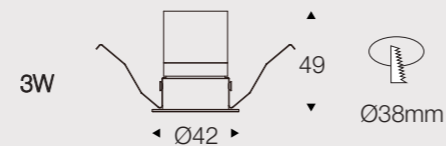

## LD-10-479







### DATA SHEET

Wattage	3W/5W/7W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15/23/38°/45/60°
Housing Color	White
Inner Ring Color	White/Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS




CE CB RoHS BIS

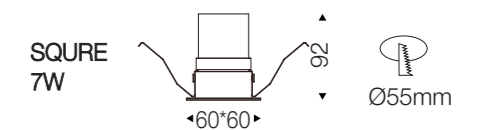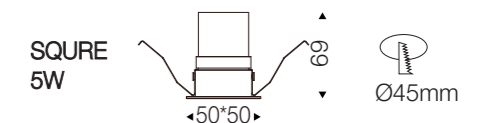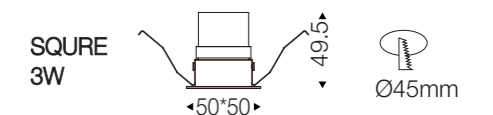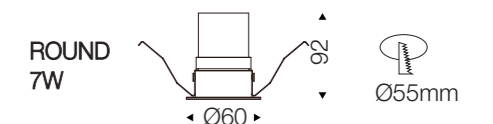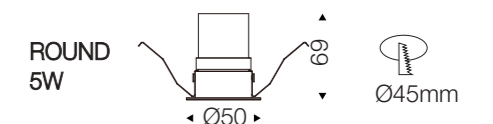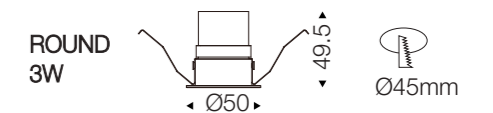



# LED RECESSED SPOT LIGHTS

## LD-10-480

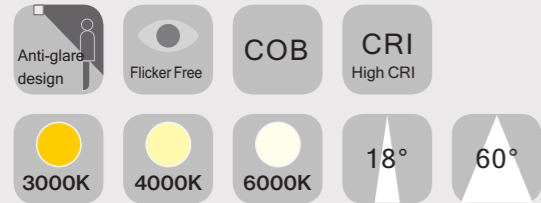

The perfect choice for accentuating specific areas and products in your sales area. With their adjustable heads, you can easily direct the light exactly where you need it, ensuring optimal visibility and emphasizing the key features of your merchandise.

CE CB RoHS BIS

Housing Color: WHITE&BLACK WHITE&GREY

Inner Ring Color: BLACK GOLD




### DETAILS




### DATA SHEET


Wattage	5W/7W/12W/5W*2
Lumen Flux	80LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

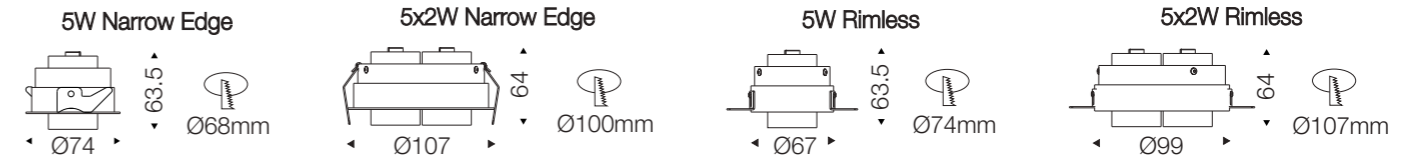

### Luminous Intensity Distribution Curve

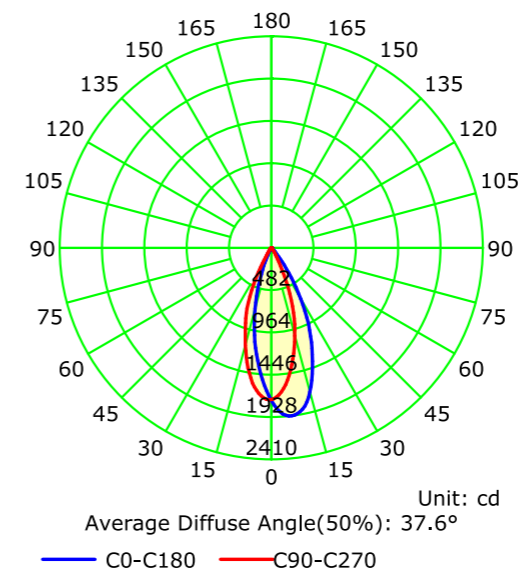

### Illuminance at a Distance

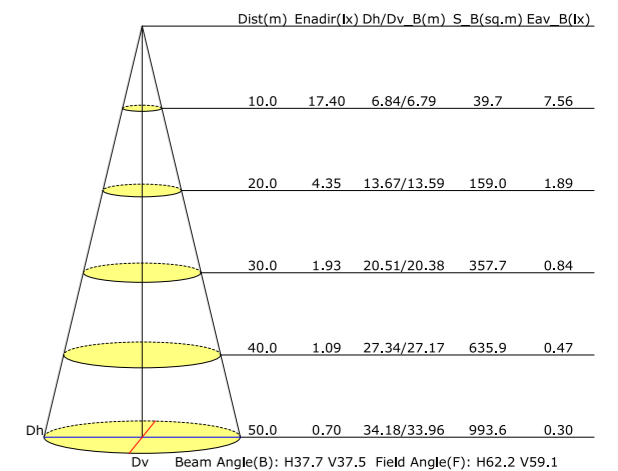



## LD-10-482


### DATA SHEET

Wattage	3W/5W/7W
Lumen Flux	57LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°
Housing Color	White
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

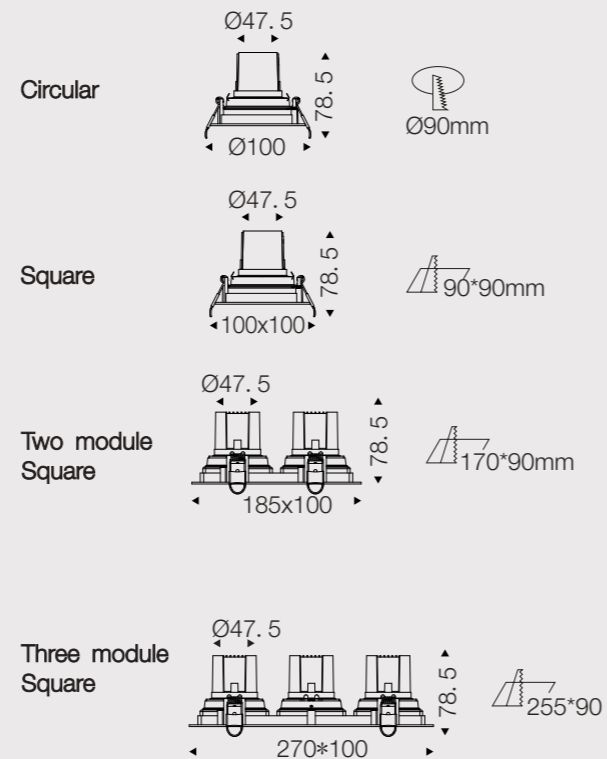

## LD-10-489


### DATA SHEET

Wattage	5W/7W/5W*2/7W*2
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	Black&White
Inner Ring Color	Black/Gold
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS




CE CB RoHS BIS

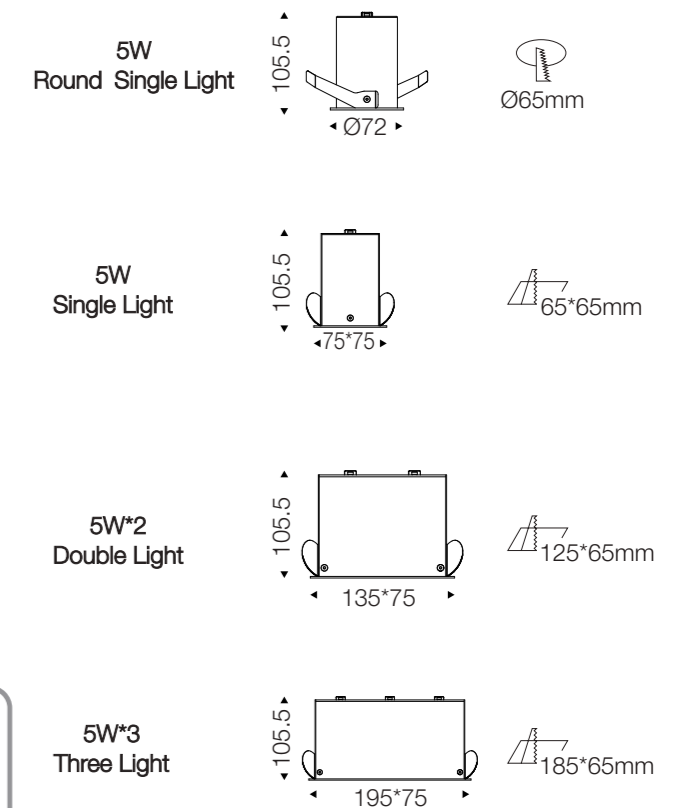

# LED RECESSED SPOT LIGHTS

## LD-10-488

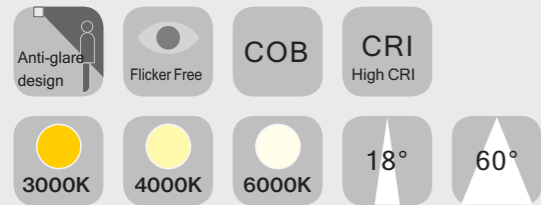

The perfect choice for accentuating specific areas and products in your sales area. With their adjustable heads, you can easily direct the light exactly where you need it, ensuring optimal visibility and emphasizing the key features of your merchandise.

CE CB RoHS BIS




### DETAILS




#### DATA SHEET


Wattage	5W/7W/12W/5W*2
Lumen Flux	80LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

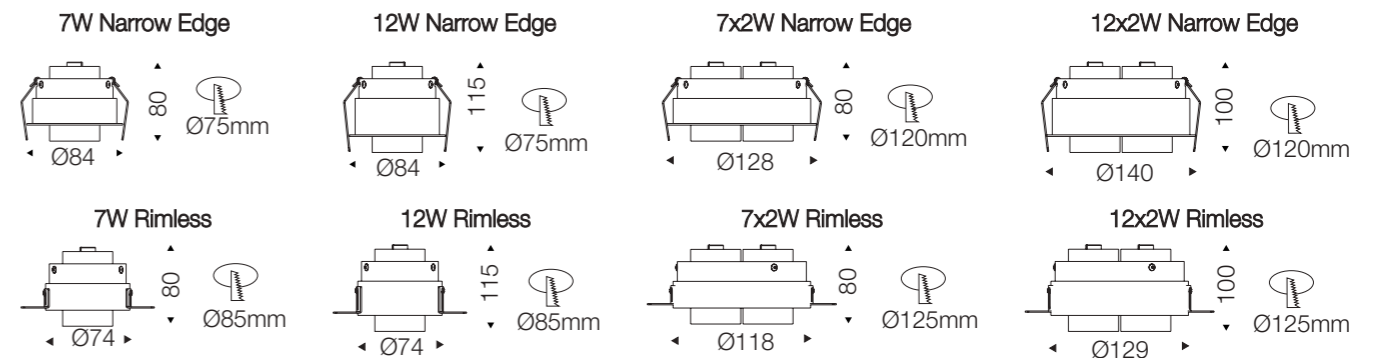

#### Luminous Intensity Distribution Curve

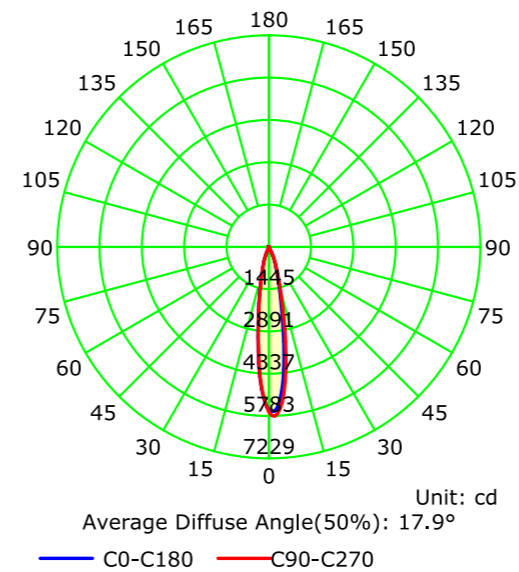

#### Illuminance at a Distance

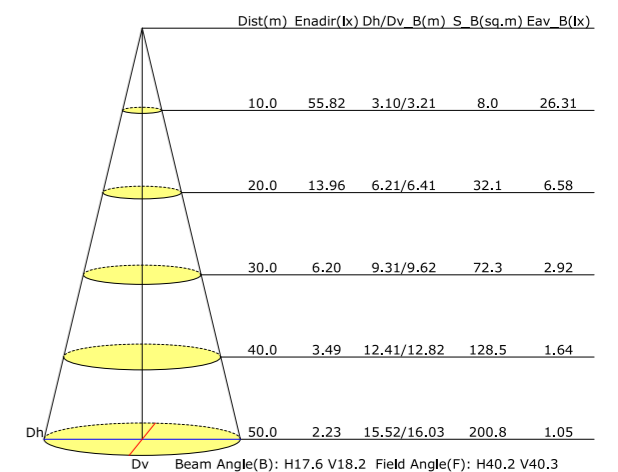





## LD-10-504

### DATA SHEET

Wattage	8W/15W
Lumen Flux	90LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	19°/24°/36°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2


### DETAILS



Positive light



Cant shine





wall lamp



CE CB RoHS BIS

Front rings:

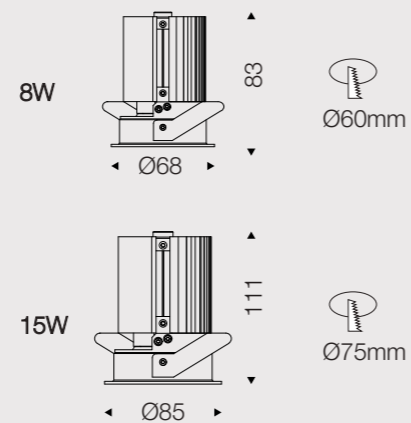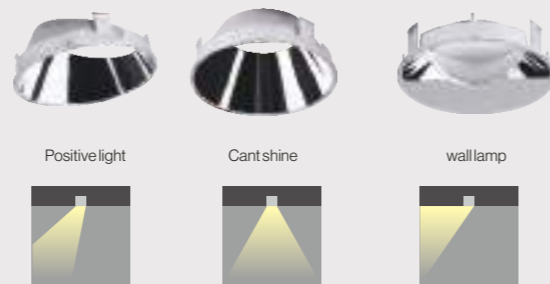

## LD-10-512


### DATA SHEET

Wattage	7W/12W
Lumen Flux	400LM
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°/60°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS




CE CB RoHS BIS

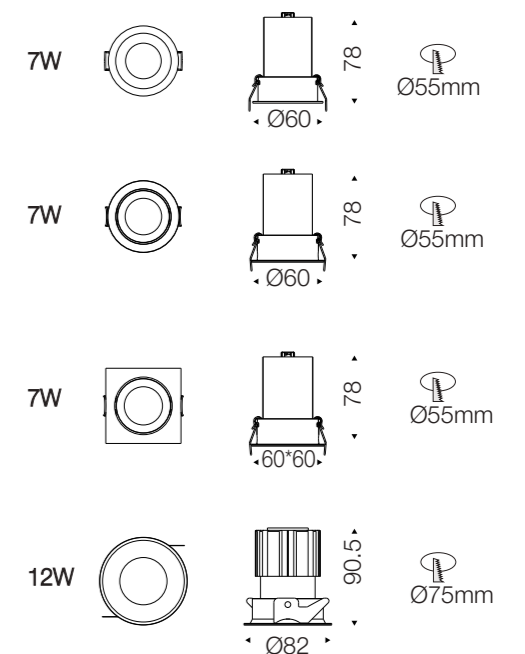

# LED SPOTLIGHT

## LD-10-562

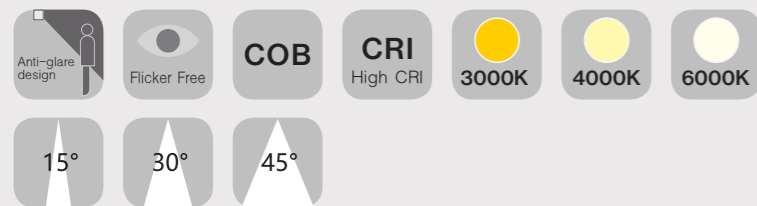

CE CB RoHS BIS

The LD-10-562 boasts an IP65 protection rating, providing robust defense against dust and water ingress. This makes it exceptionally well-suited for deployment in humid conditions or outdoor settings. With a 20° adjustable feature, users have the freedom to fine-tune the angle, allowing for optimal wall washing and accent lighting functions.

Housing Color  WHITE  BLACK




### DETAILS




### DATA SHEET


Wattage	10W
Lumen Flux	860LM/W
Housing Color	White&Black
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Office/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

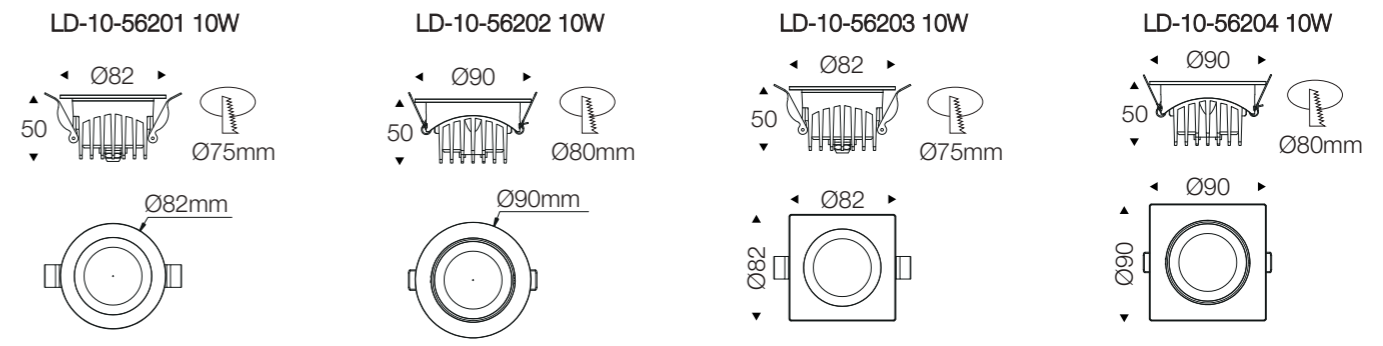

### Luminous Intensity Distribution Curve

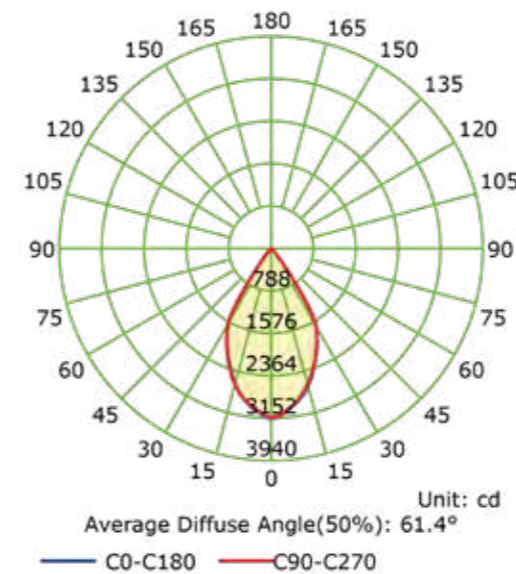


### Illuminance at a Distance

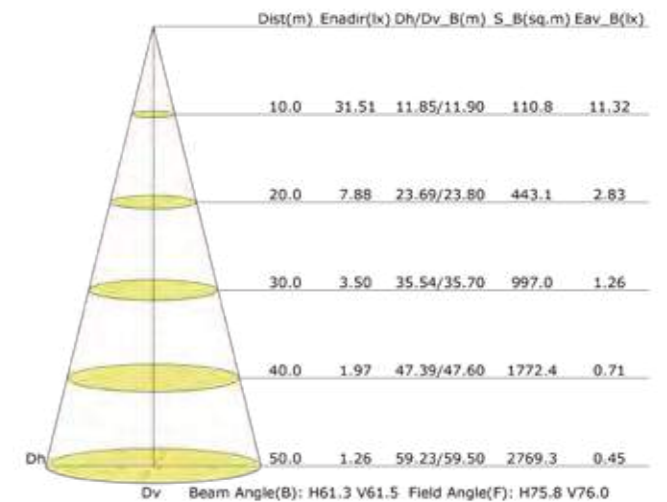

# LED SPOT LIGHT

## LD-10-573

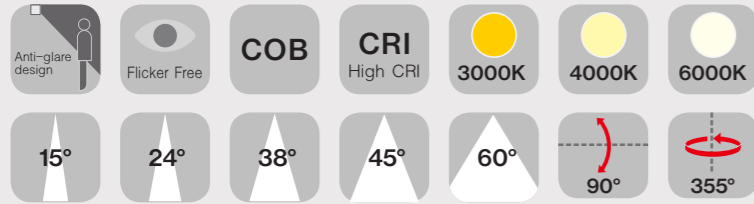

Ideal for retail stores and supermarkets, the Metris Series offers a range of options for shaping and combining, allowing you to create unique lighting configurations tailored to your space. The dynamic and adjustable lighting is essential for showcasing products and creating an inviting atmosphere.




CE CB RoHS BIS

Housing Color: WHITE&BLACK



### Luminous Intensity Distribution Curve

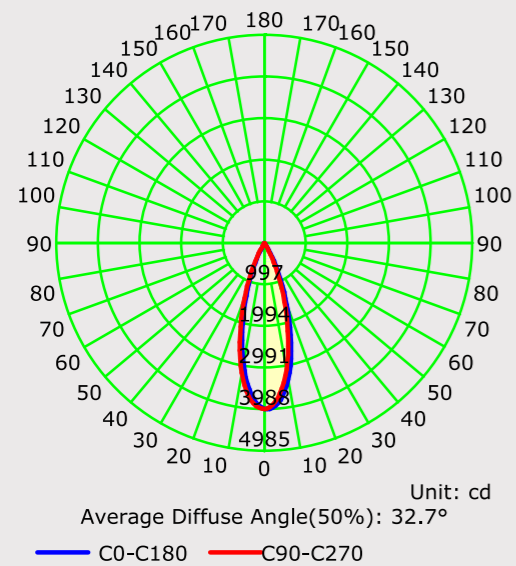

### Illuminance at a Distance

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3980.77	0.59/0.59	0.3	1683.46
2.0	995.19	1.18/1.17	1.1	420.87
3.0	442.31	1.77/1.76	2.4	187.05
4.0	248.80	2.36/2.34	4.3	105.22
5.0	159.23	2.94/2.93	6.8	67.34
6.0	110.58	3.53/3.51	9.8	46.76
7.0	81.24	4.12/4.10	13.3	34.36
8.0	62.20	4.71/4.69	17.4	26.30
9.0	49.15	5.30/5.27	22.0	20.78
10.0	39.81	5.89/5.86	27.2	16.83

Dv Beam Angle(B): H32.8 V32.6 Field Angle(F): H55.3 V55.0


CE CB RoHS BIS

## LD-10-57301-04 (Grille light with spring clips)



### DATA SHEET

Wattage	8W/15W/20W/30W
Lumen Flux	85LM/W
Housing Color	White&Black
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Size	Φ80*35 mm/Φ128*35 mm/Φ173*35 mm/Φ218*35mm
Dimming Option	TRIAC/0-10V/DALI2

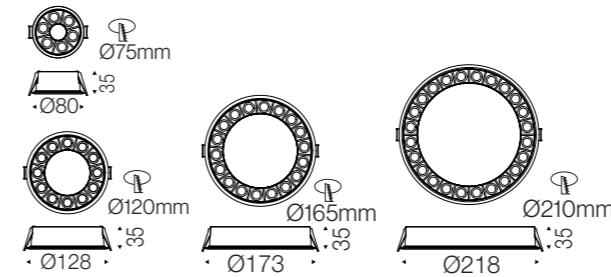


## LD-10-57305-07 (Grille light)



### DATA SHEET

Wattage	8W/15W/20W
Lumen Flux	85LM/W
Housing Color	White&Black
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Size	Φ70*35 mm/Φ115*35 mm/Φ160*35 mm
Dimming Option	TRIAC/0-10V/DALI2

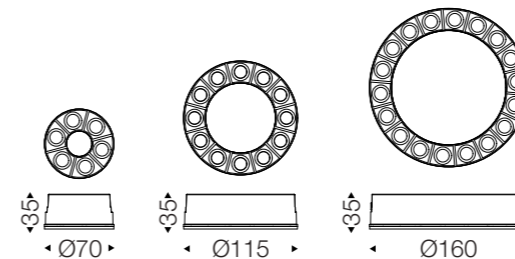






**LD-10-57308-10**  
**(Spotlight)**

**DATA SHEET**


Wattage	7W/12W/20W
Lumen Flux	85LM/W
Housing Color	White&Black
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Size	Φ70*56 mm/Φ115*77 mm/Φ160*102 mm
Dimming Option	TRIAC/0-10V/DALI2

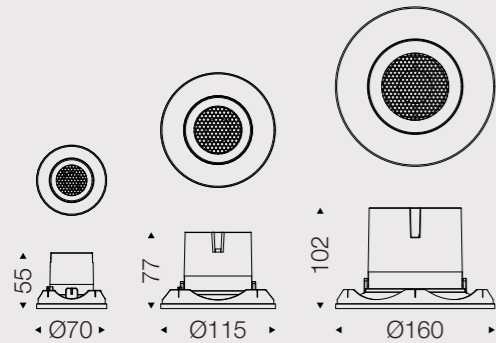

**LD-10-57311-13**  
**(Spotlight)**

**DATA SHEET**


Wattage	7W/10W/18W
Lumen Flux	84LM/W
Housing Color	White&Black
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Size	Φ70*42 mm/Φ115*46 mm/Φ160*48 mm
Dimming Option	TRIAC/0-10V/DALI2

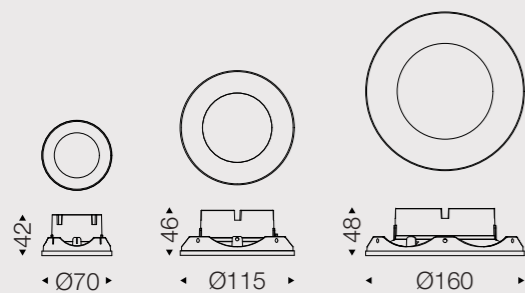

**LD-10-57314-16**  
**(Spotlight)**

**DATA SHEET**


Wattage	5W/8W/15W
Lumen Flux	70LM/W
Housing Color	White&Black
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Size	Φ70*19mm/Φ115*19 mm/Φ160*19 mm
Dimming Option	TRIAC/0-10V/DALI2

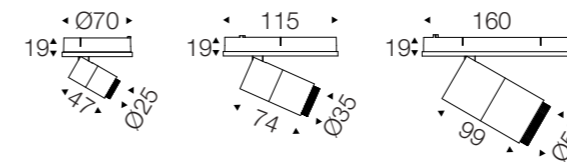

**LD-10-57317-19**  
**(Plastic panel)**

**DATA SHEET**

Housing Color	White
Material	PC
Size	Φ70*17mm/Φ115*17 mm/Φ160*17 mm
Dimming Option	TRIAC/0-10V/DALI2

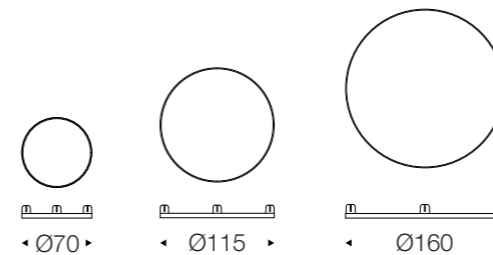



## LD-10-576


### DATA SHEET

Wattage	5W/10W//18W
Lumen Flux	65LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

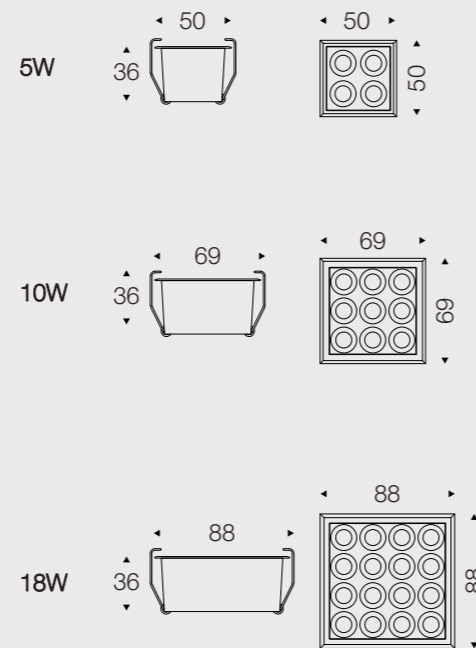

## LD-10-584


### DATA SHEET

Wattage	10W/15W
Lumen Flux	85LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

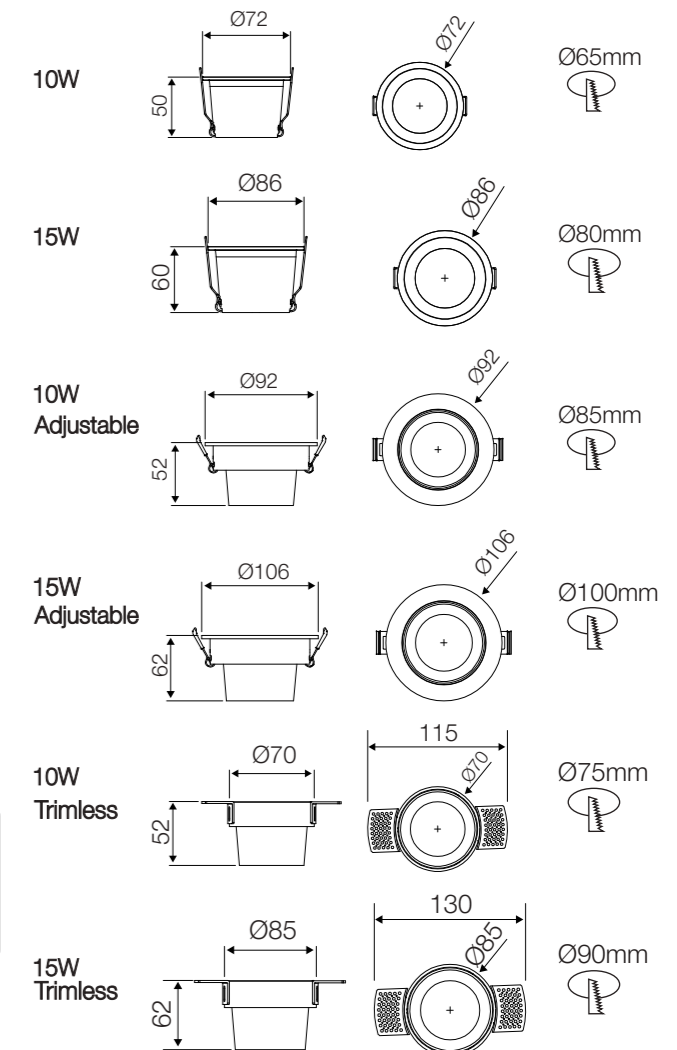



## LD-10-588


### DATA SHEET

Wattage	3W/7W/12W/18W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/38°/60°
Housing Color	White&Black
LED Light Source	COB
Application	Store/Gallery/Exhibition hall
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

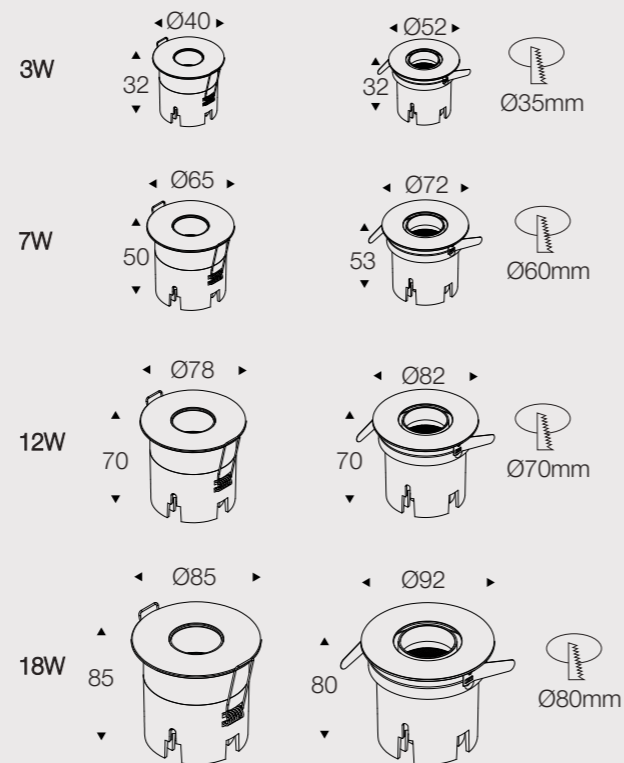

## LD-10-614


### DATA SHEET

Wattage	5W/10W/18W
Lumen Flux	75LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS




CE CB RoHS BIS

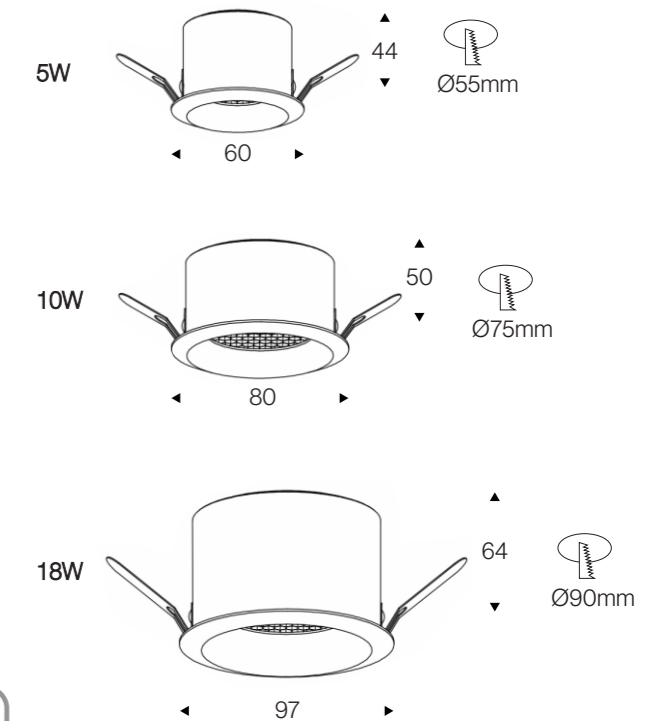



## LED SPOTLIGHT

### LD-10-626

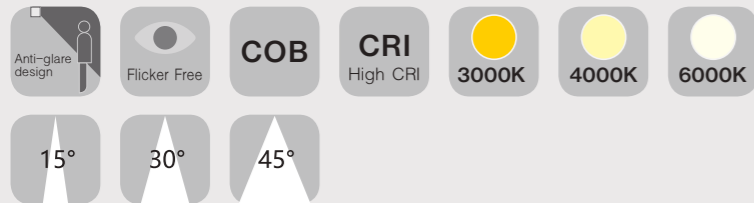

LD-10-626 features an IP65 protection rating, effectively preventing dust and water ingress, making it suitable for use in humid or outdoor environments. Constructed from aluminum alloy, it excels in heat dissipation: the high-quality aluminum construction enhances thermal performance, contributing to prolonged lifespan and efficiency of the downlight.

CE CB RoHS BIS

Housing Color WHITE BLACK



## DETAILS




### DATA SHEET

Wattage	10W/18W
Lumen Flux	85LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2



### Luminous Intensity Distribution Curve

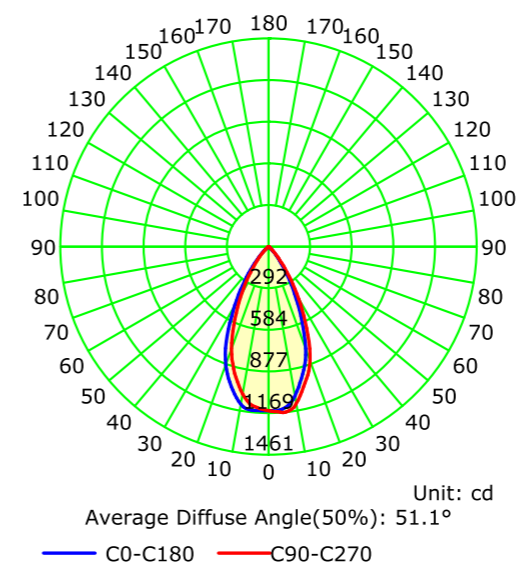

### Illuminance at a Distance

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1151.62	0.97/0.94	0.7	447.87
2.0	287.90	1.93/1.89	2.9	111.97
3.0	127.96	2.90/2.83	6.5	49.76
4.0	71.98	3.87/3.77	11.6	27.99
5.0	46.06	4.84/4.72	18.1	17.91
6.0	31.99	5.80/5.66	26.0	12.44
7.0	23.50	6.77/6.60	35.4	9.14
8.0	17.99	7.74/7.55	46.2	7.00
9.0	14.22	8.70/8.49	58.5	5.53
10.0	11.52	9.67/9.43	72.3	4.48

Dh Beam Angle(B): H51.6 V50.5 Field Angle(F): H80.8 V80.8



## LD-10-626


### DATA SHEET

Wattage	10W/18W
Lumen Flux	85LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

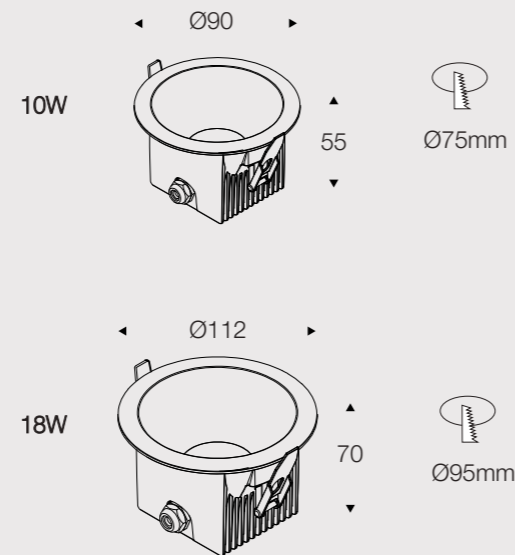

## LD-10-645


### DATA SHEET

Wattage	6W/6W*2/6W*3
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

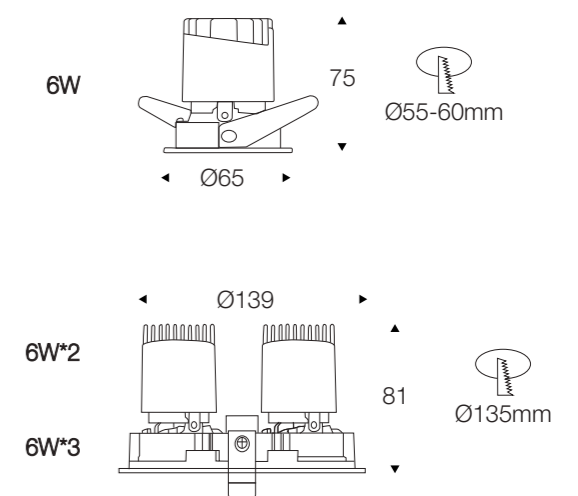



## LD-10-652


### DATA SHEET

Wattage	10W/15W
Lumen Flux	90LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

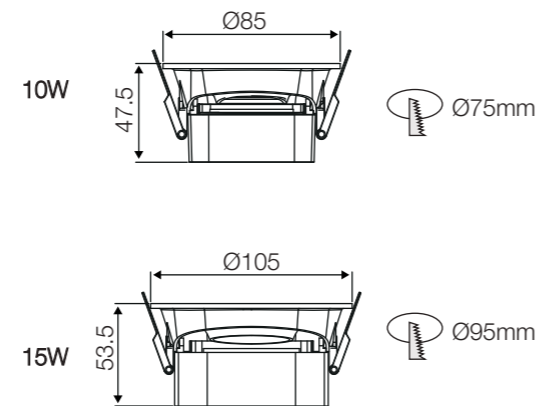

## LD-10-685


### DATA SHEET

Wattage	3W/5W/7W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	5°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS




CE CB RoHS BIS

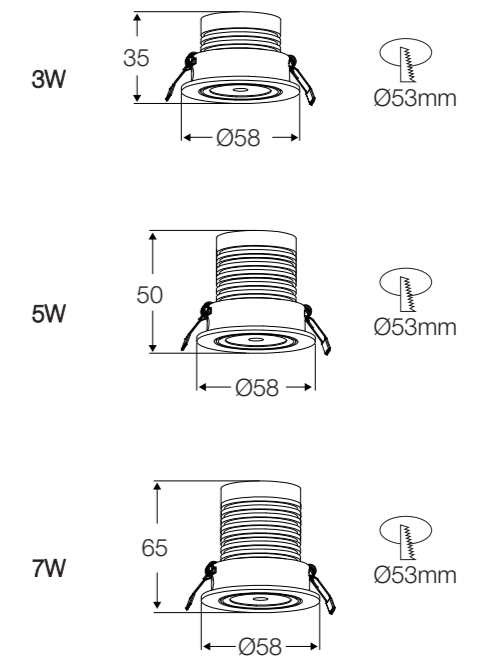



## LED SPOTLIGHT

### LD-10-705

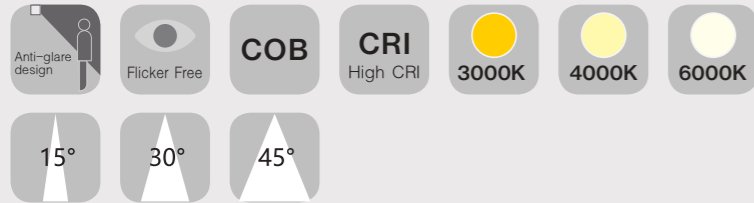

20° adjustable angle, with wall washing function, meeting the needs of different occasions such as home, store, and office, and museum. Unique aluminum heat sink design provides good heat dissipation performance and extends lamp bead life

CE CB RoHS BIS

Housing Color  Matte white  Grey




## DETAILS




### DATA SHEET

Wattage	3W/7W/12W/18W/24W/30W/50W
Lumen Flux	80LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Store/Office/Museum
Dimming Option	TRIAC/0-10V/DALI2

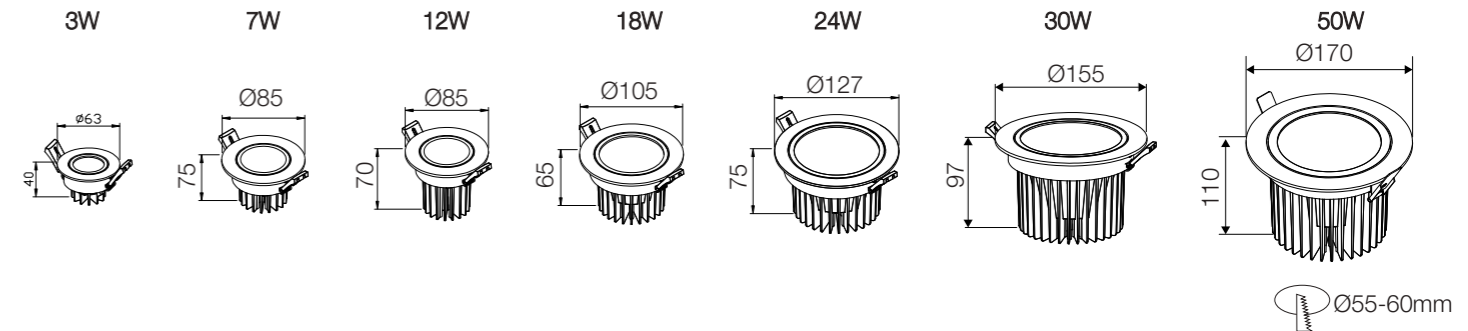


### Luminous Intensity Distribution Curve

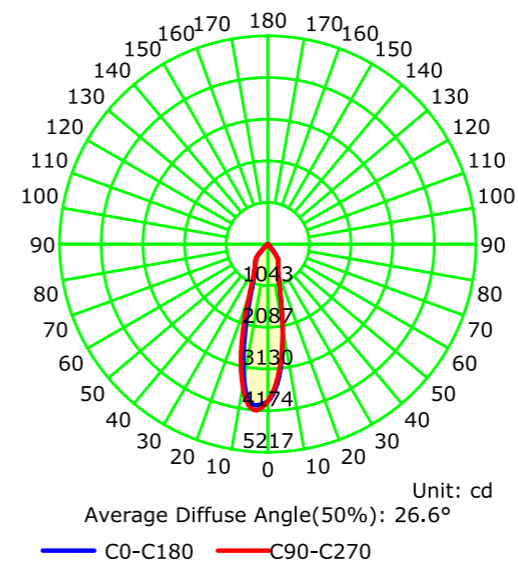

### Illuminance at a Distance

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq,m)	Eav_B(lx)
1.0	3934.98	0.46/0.48	0.2	1780.39
2.0	983.74	0.93/0.97	0.7	445.10
3.0	437.22	1.39/1.45	1.7	197.82
4.0	245.94	1.85/1.94	3.0	111.27
5.0	157.40	2.31/2.42	4.7	71.22
6.0	109.31	2.78/2.90	6.7	49.46
7.0	80.31	3.24/3.39	9.1	36.33
8.0	61.48	3.70/3.87	11.9	27.82
9.0	48.58	4.17/4.36	15.1	21.98
10.0	39.35	4.63/4.84	18.6	17.80

Dh Beam Angle(B): H26.1 V27.2 Field Angle(F): H76.2 V76.8





## LD-10-697

CE CB RoHS BIS

### DATA SHEET

Wattage	3W/7W
Lumen Flux	120LM/455LM
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/36°
Housing Color	White&Grey
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

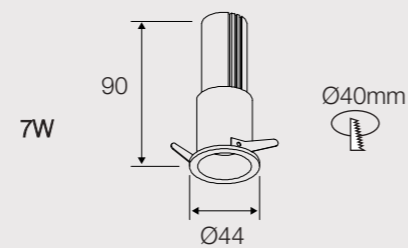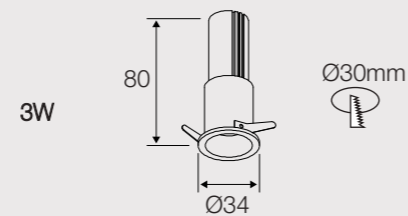

### DETAILS




## LD-10-738

CE CB RoHS BIS

### DATA SHEET

Wattage	8W
Lumen Flux	400LM
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

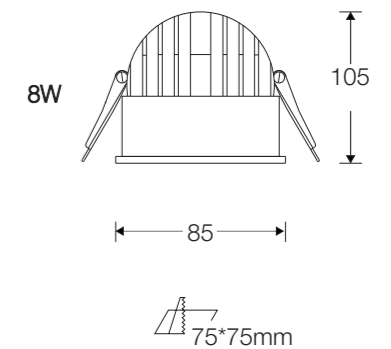

### DETAILS






## LD-10-740

CE CB RoHS   BIS

### DATA SHEET

Wattage	8W
Lumen Flux	400LM
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/23°/38°
Housing Color	Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

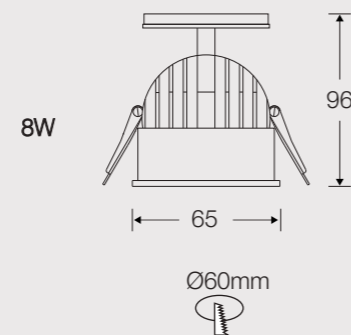

### DETAILS




## LD-10-741

CE CB RoHS   BIS

### DATA SHEET


Wattage	7W/12W
Lumen Flux	400LM
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°/60°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

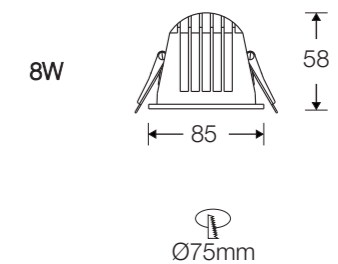

### DETAILS





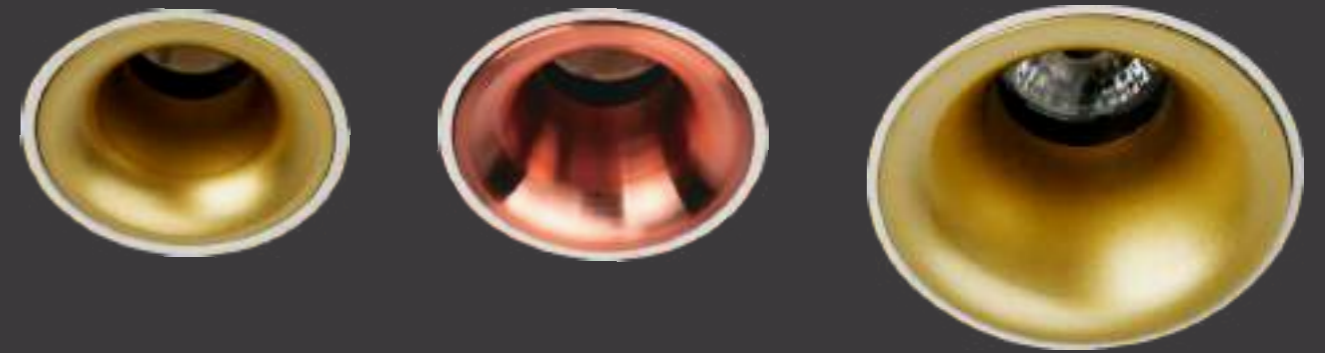

## LD-10-803


### DATA SHEET

Wattage	5W/7W/10W/15W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/36°
Housing Color	White/Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

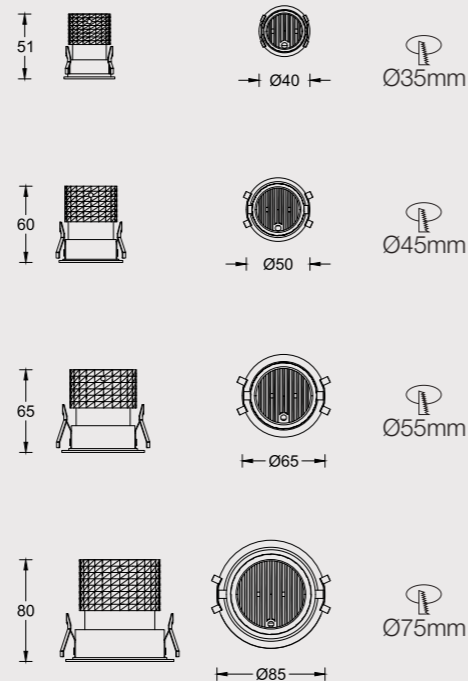


## LD-10-804


### DATA SHEET

Wattage	7W/10W/15W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/36°
Housing Color	White/Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

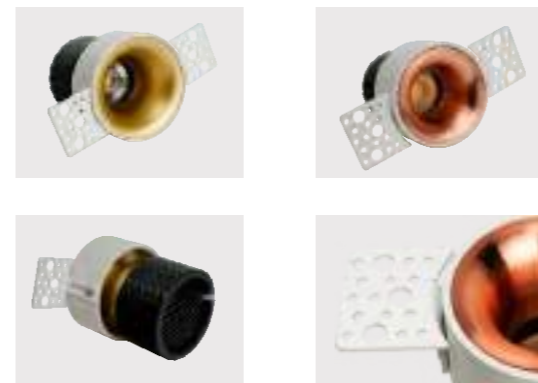

CE CB RoHS BIS

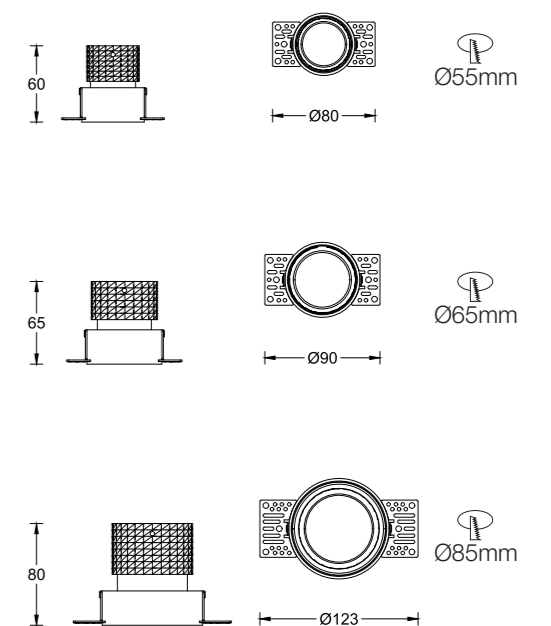



**DECORATIVE SPOTLIGHTS**

**Technical light**



Cooperative brand:



**KL-26-2746**

**DATA SHEET**

Wattage	6W
Lumen Flux	450LM
Color Temperature	3000K/4000K/6000K
Beam Angel	100°
Housing Color	Chrome
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel

**DETAILS**



CE CB RoHS BIS

5W			
9W			
15W			
5W			
10W			
15W			



## KL-26-591


### DATA SHEET

Wattage	5W
Lumen Flux	355LM
Color Temperature	3000K/4000K/6000K
Beam Angel	100°
Housing Color	Matte Black
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel

### DETAILS



CE CB RoHS BIS

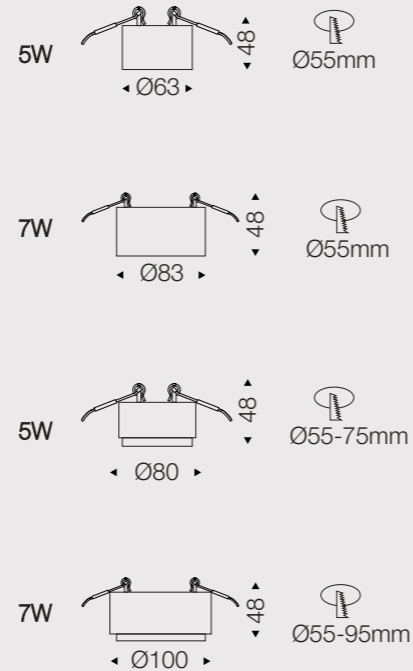

## KL-26-595


### DATA SHEET

Wattage	6W
Lumen Flux	450LM
Color Temperature	3000K/4000K/6000K
Beam Angel	100°
Housing Color	Chrome
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel

### DETAILS



CE CB RoHS BIS

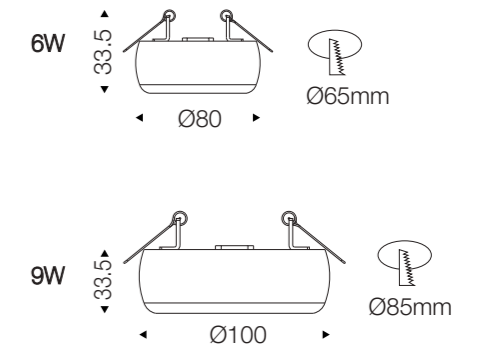







## KL-26-599

CE CB RoHS BIS

### DATA SHEET

Wattage	5W
Lumen Flux	355LM
Color Temperature	3000K/4000K/6000K
Beam Angel	100°
Housing Color	Matte Black
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel

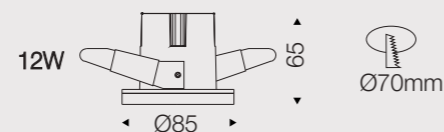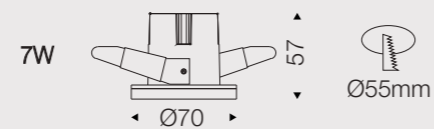

### DETAILS






## KL-26-3321

CE CB RoHS BIS

### DATA SHEET

Wattage	1W/3W/5W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/50°
Housing Color	Chrome
LED Light Source	COB
Application	Home/Office/Store/Hotel

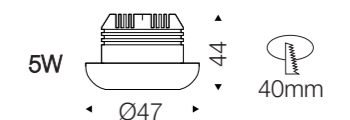

### DETAILS





## KL-26-3235


### DATA SHEET

Wattage	5W
Lumen Flux	355LM
Color Temperature	3000K/4000K/6000K
Beam Angel	100°
Housing Color	Matte Black
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel

### DETAILS



CE CB RoHS BIS

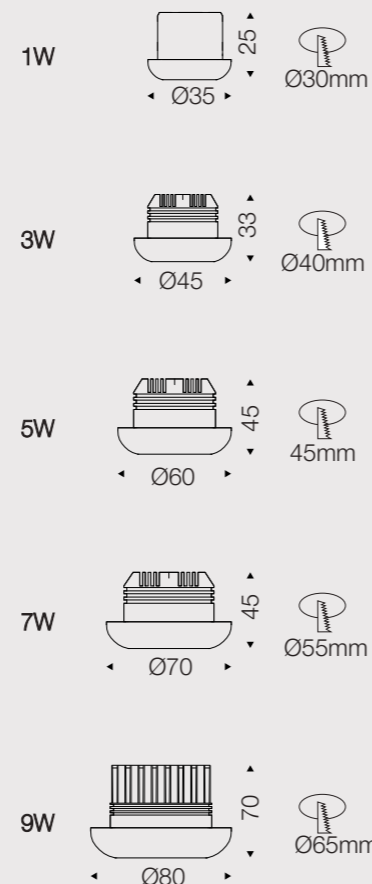

## KL-26-3327


### DATA SHEET

Wattage	6W
Lumen Flux	450LM
Color Temperature	3000K/4000K/6000K
Beam Angel	100°
Housing Color	Chrome
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel

### DETAILS




CE CB RoHS BIS

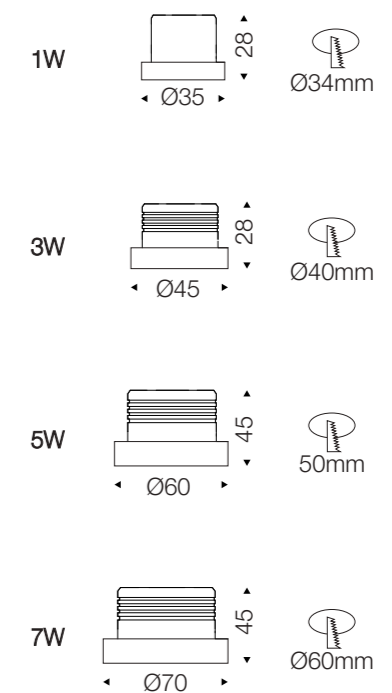



**LED SURFACE LIGHT**  
**Technical light**

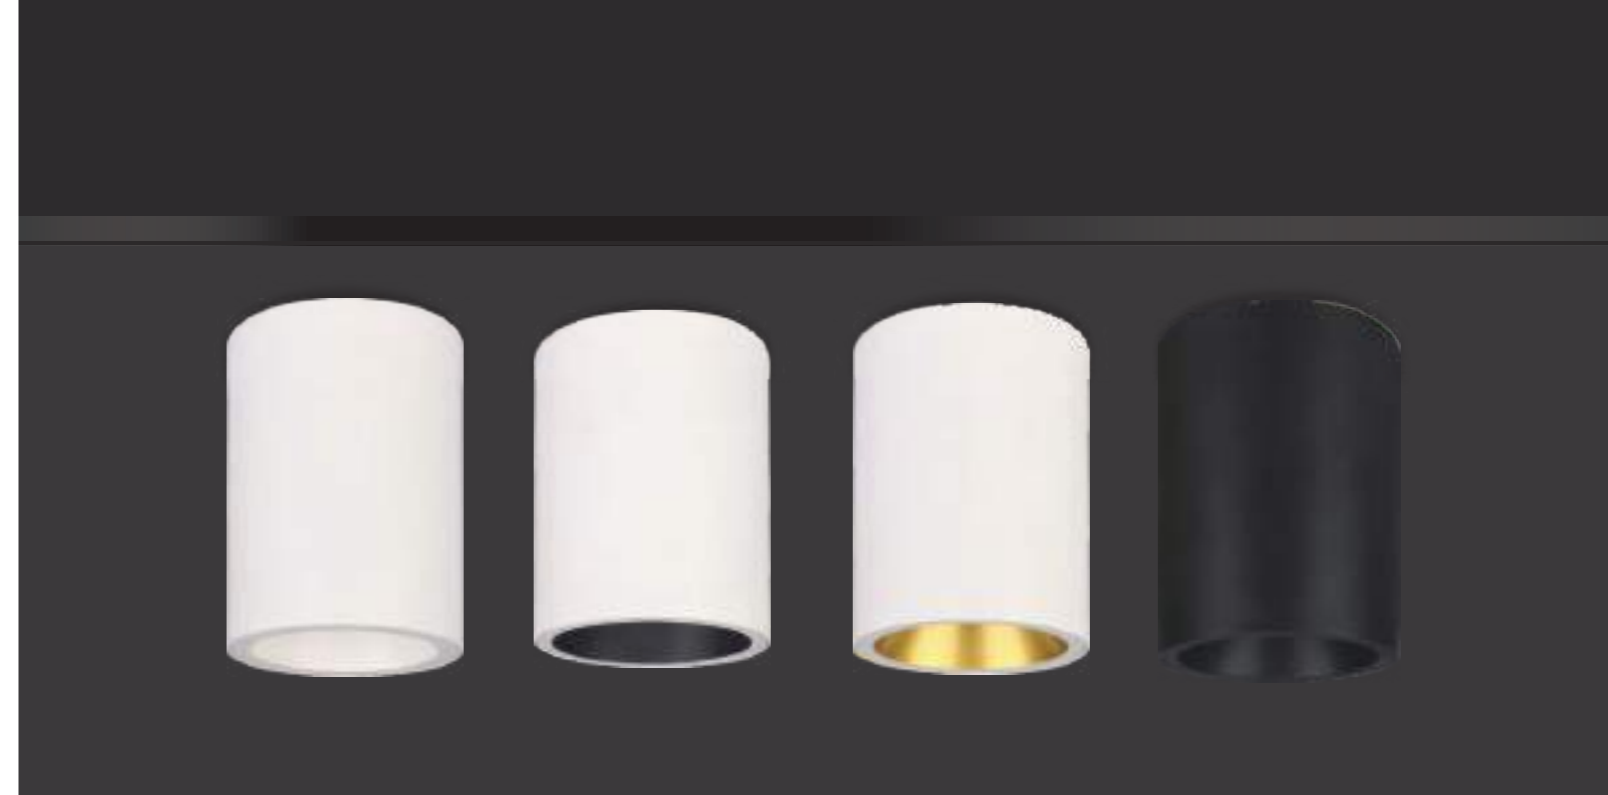

**LD-11-453**


**DATA SHEET**

Wattage	7W/12W/18W/24W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/36°
Housing Color	White/Black
Inner Ring Color	White/Black/Gold
LED Light Source	COB
Application	Home/Office/Store/Hotel

**DETAILS**



CE CB RoHS BIS

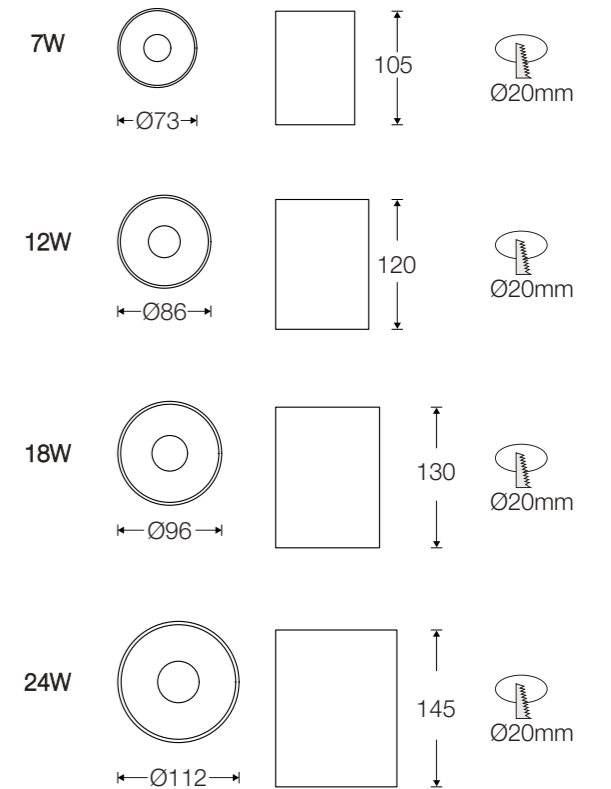


Cooperative brand:





# LED SURFACE LIGHT

## LD-11-568

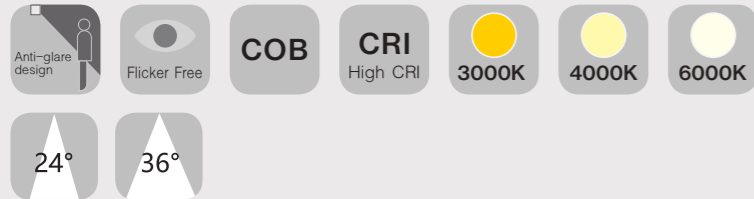

LD-11-568 carries an IP65 rating, providing effective protection against dust and water ingress. It can be effortlessly installed, saving time and effort while maintaining a secure fit. Crafted from high-quality aluminum, this downlight not only ensures durability but also excels in heat dissipation contributing to the longevity and efficiency of the fixture.

Housing Color:  WHITE  BLACK






### DETAILS




### DATA SHEET


Wattage	10W/18W/25W
Lumen Flux	92LM/W
Cover	Transparent/Frosted
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Bedroom/Office/Living room
Dimming Option	TRIAC/0-10V/DALI2

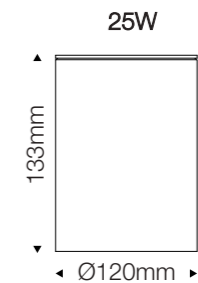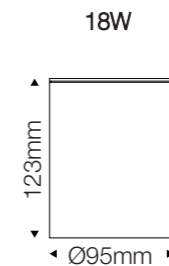

### Luminous Intensity Distribution Curve

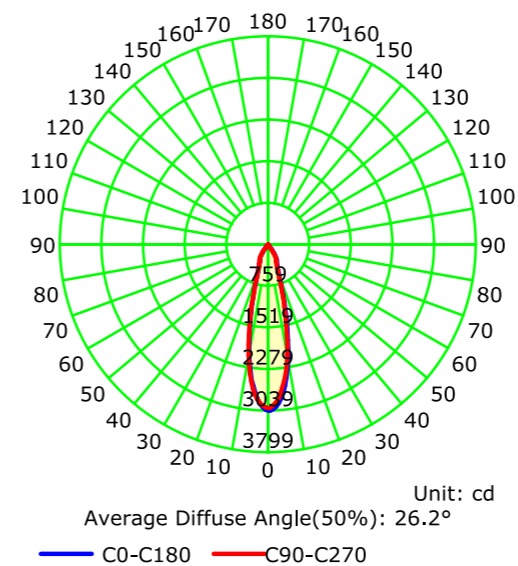


### Illuminance at a Distance

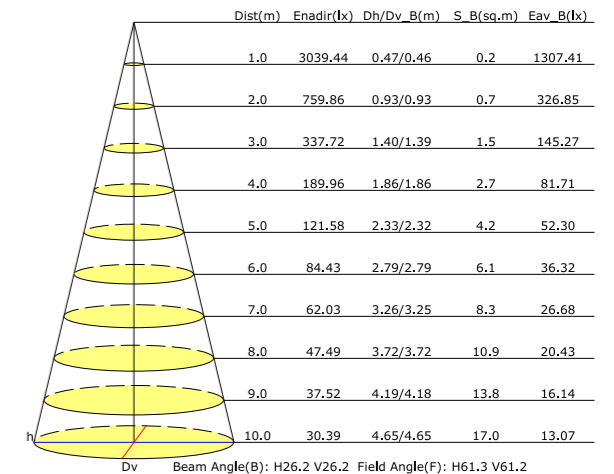

## TONDO SERIES

### LD-11-524

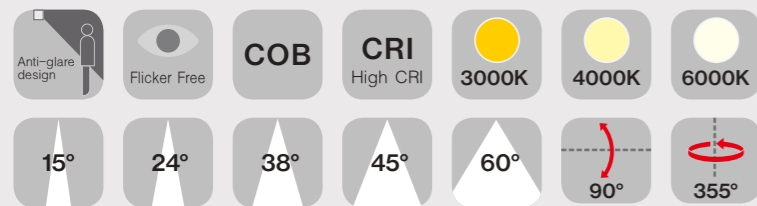

Designed with a focus on modern aesthetics and functionality, these fixtures seamlessly blend into any interior while offering customizable lighting solutions. Ideal for accentuating artwork, highlighting architectural features, or creating ambient lighting, these multi-head spotlights are versatile enough to suit various applications.

Housing Color  WHITE  
 Inner Ring Color  GOLD

CE CB RoHS BIS




## DETAILS




### DATA SHEET


Wattage	10W/10W*2/10W*3
Lumen Flux	80LM/W
Housing Color	White&Gold
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Home/Gallery/Museum/Store
Dimming Option	TRIAC/0-10V/DALI2

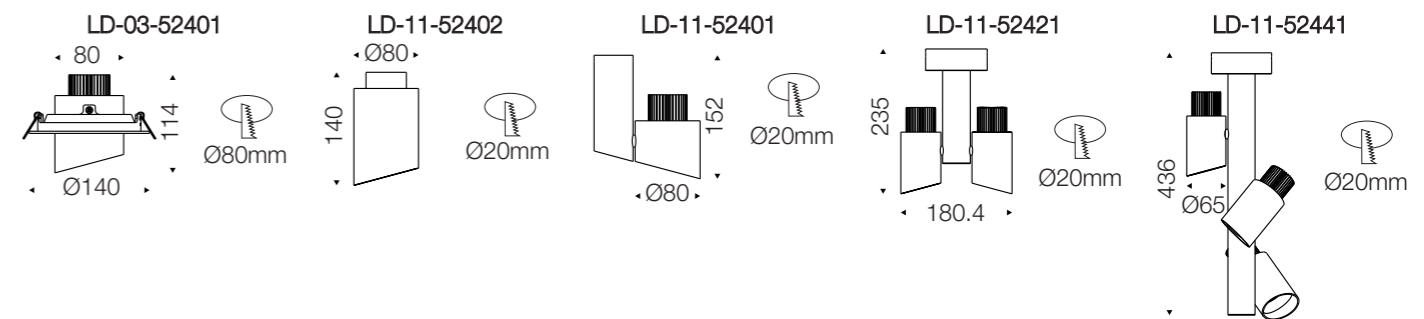

### Luminous Intensity Distribution Curve

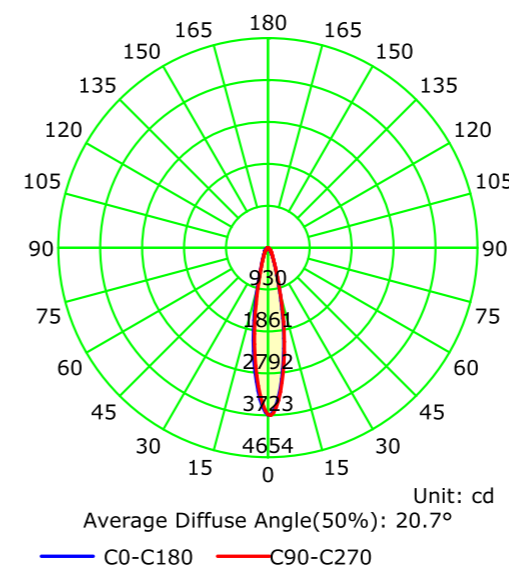

### Illuminance at a Distance

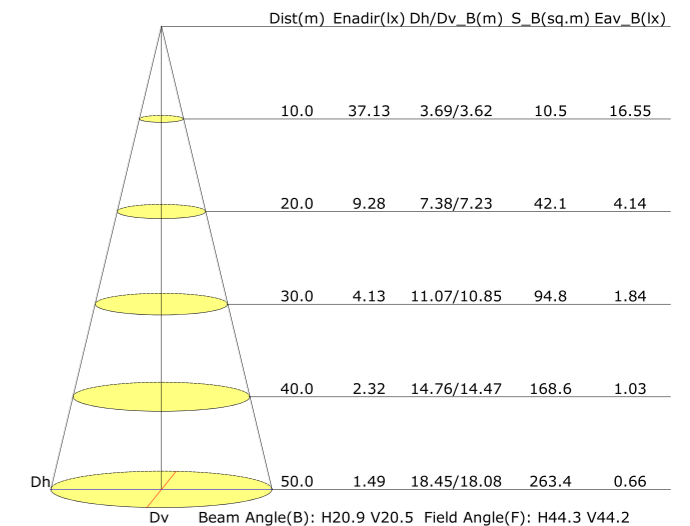



## LD-06-503

### DATA SHEET


Wattage	10W/2*10W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/36°
Housing Color	White/Black
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS




CE CB RoHS BIS

10W



2\*10W



## LD-11-443

### DATA SHEET


Wattage	7W/12W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White
Inner Ring Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS




CE CB RoHS BIS


1W

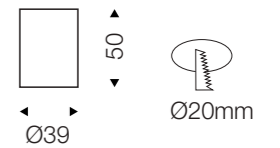


3W



5W

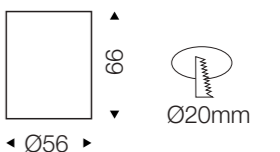



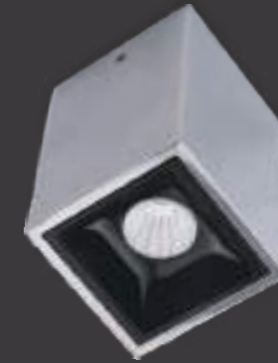

## LD-11-716



### DATA SHEET

Wattage	7W/12W/18W
Lumen Flux	85LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15/30/45°
Housing Color	White/Black
Inner Ring Color	White/Black/Chrome
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

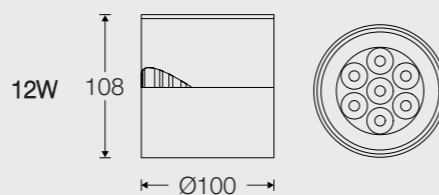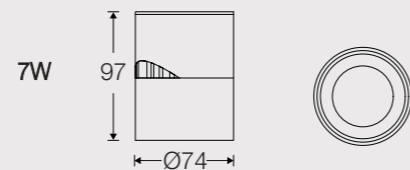

## LD-11-454







### DATA SHEET

Wattage	7W/12W/18W
Lumen Flux	85LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15/30/45°
Housing Color	Chrome/Copper/Sand nickel/Matt white/Matt black
Inner Ring Color	White/Black/Chrome
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

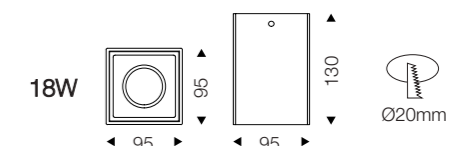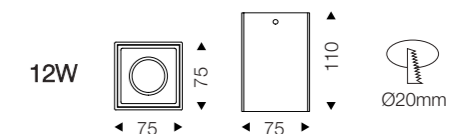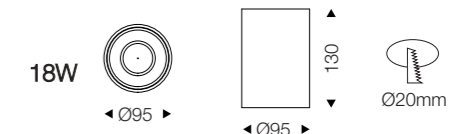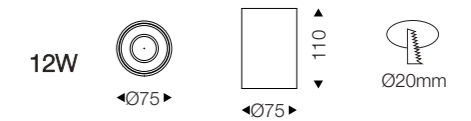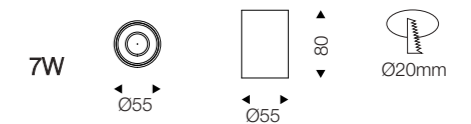



## LD-02-271



### DATA SHEET

Wattage	5W/2*5W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°
Housing Color	White/Black
LED Light Source	COB
Application	Store/Museum/Gallery/Coffee shop
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS   BIS

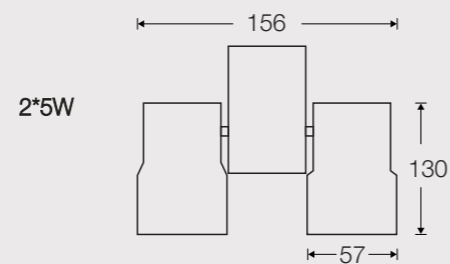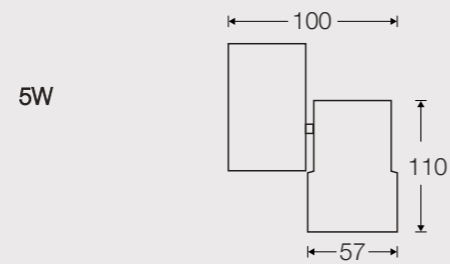

## LD-02-272



### DATA SHEET

Wattage	5W/2*5W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°
Housing Color	White/Black
LED Light Source	COB
Application	Store/Museum/Gallery/Coffee shop
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS   BIS

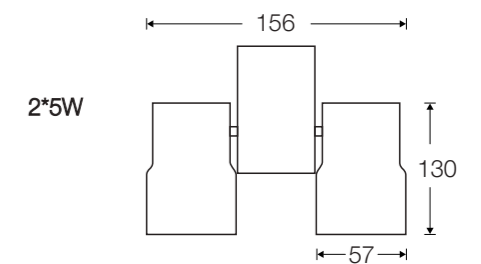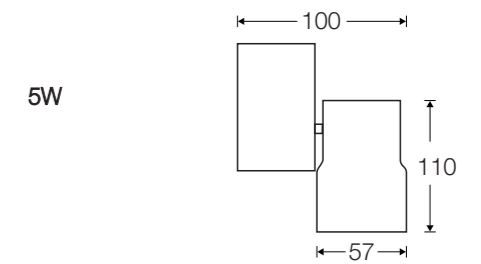



## LD-11-682


### DATA SHEET

Wattage	8W/15W/24W
Lumen Flux	98LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Office/Sore/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

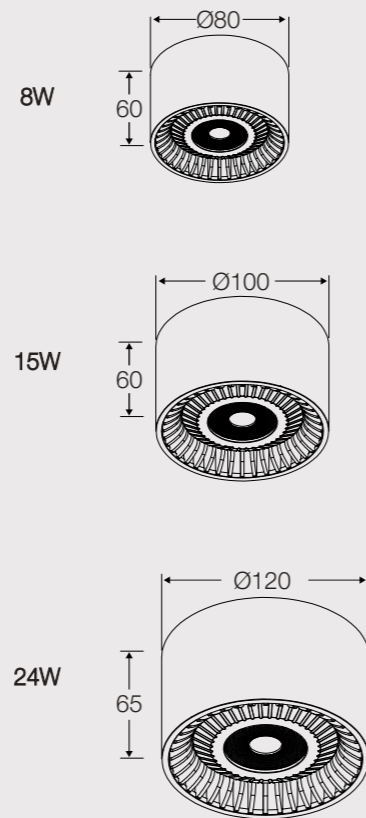


## LD-11-715

### DATA SHEET

Wattage	15W
Lumen Flux	1200LM
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White&Gold
LED Light Source	COB
Application	Bedroom/Restaurant/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS





## L0-11-563


### DATA SHEET

Wattage	10W/20W/30W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	120°
Housing Color	White
LED Light Source	SMD2835
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

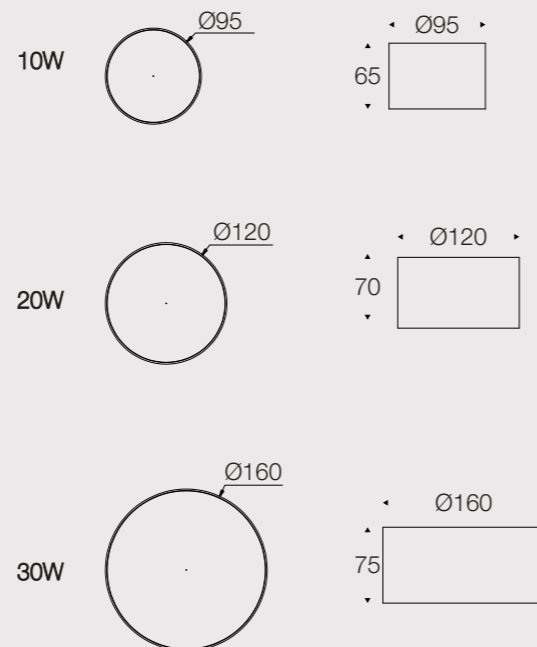

## LD-11-564


### DATA SHEET

Wattage	10W
Lumen Flux	739LM
Color Temperature	3000K/4000K/6000K
Beam Angel	120°
Housing Color	White&Satin nickel
LED Light Source	SMD2835
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

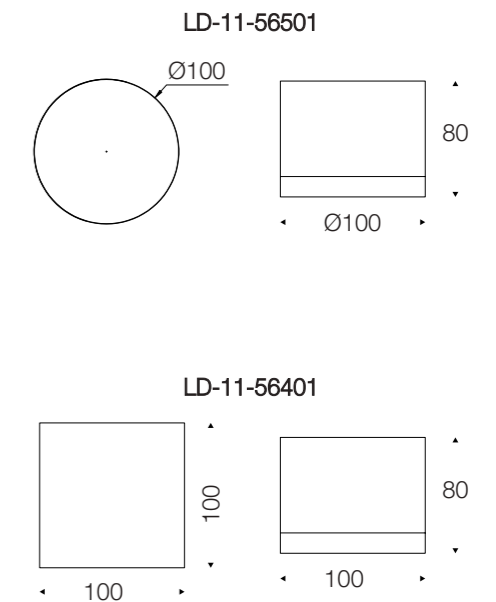



## LD-02-267


### DATA SHEET

Wattage	5W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°
Housing Color	White/Black/Silver
LED Light Source	COB
Application	Store/Museum/Gallery/Coffee shop
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

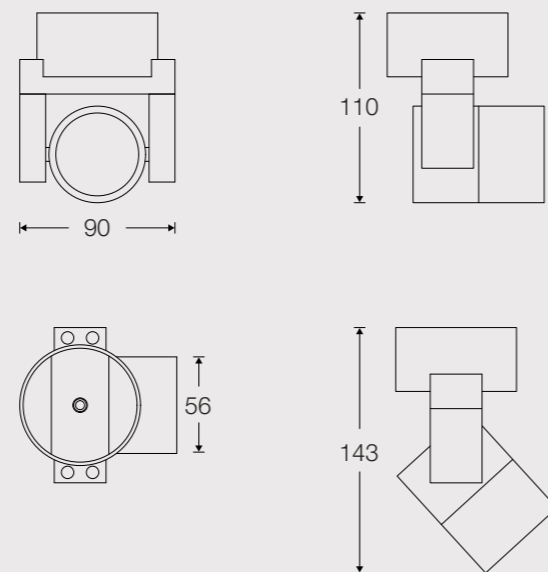


## LD-11-576


### DATA SHEET

Wattage	5W/10W/18W
Lumen Flux	62.5LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/ 24°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

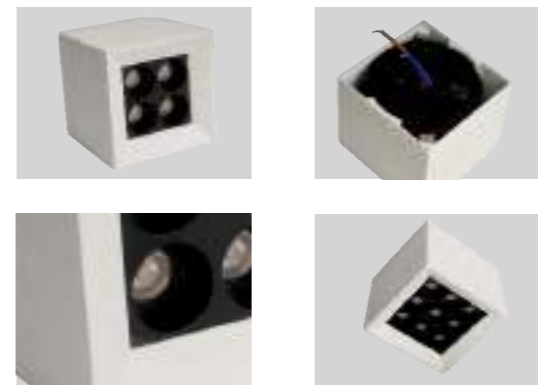

CE CB RoHS BIS

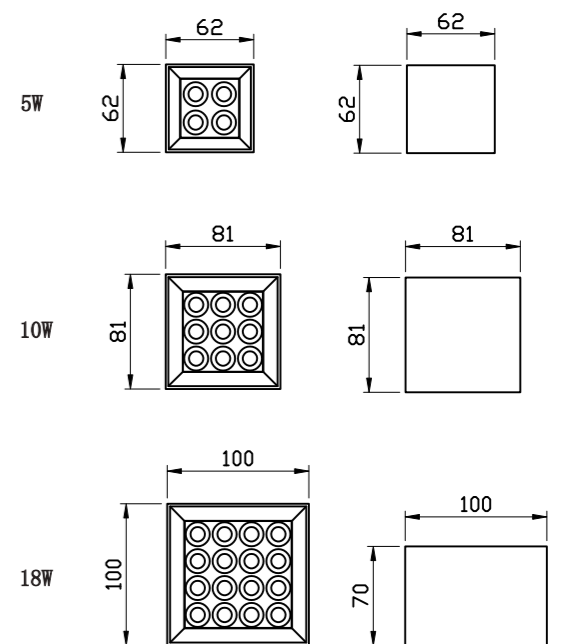





## LD-11-800

CE CB RoHS BIS

### DATA SHEET

Wattage	7W/12W/18W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/36°
Housing Color	White/Black/Silver
LED Light Source	COB
Application	Store/Museum/Gallery/Coffee shop
Dimming Option	TRIAC/0-10V/DALI2

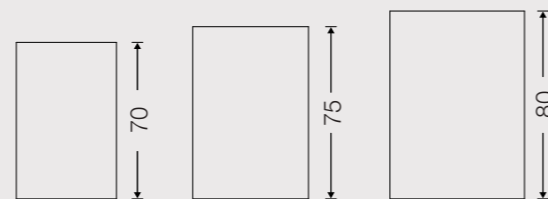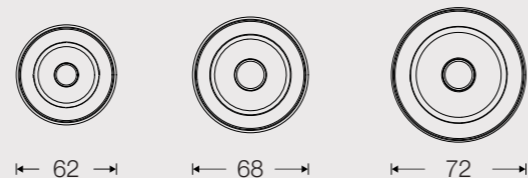

### DETAILS





## LD-11-802


CE CB RoHS BIS

### DATA SHEET

Wattage	7W/12W/18W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	45-50°
Housing Color	White/Black/Silver
LED Light Source	SMD
Application	Store/Museum/Gallery/Coffee shop
Dimming Option	TRIAC/0-10V/DALI2

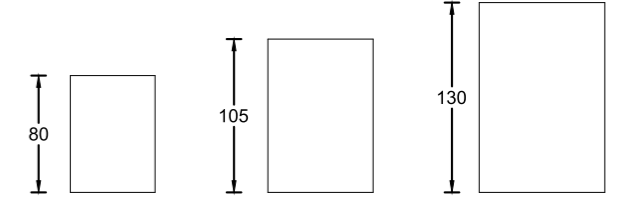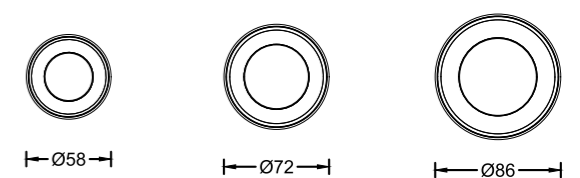

### DETAILS

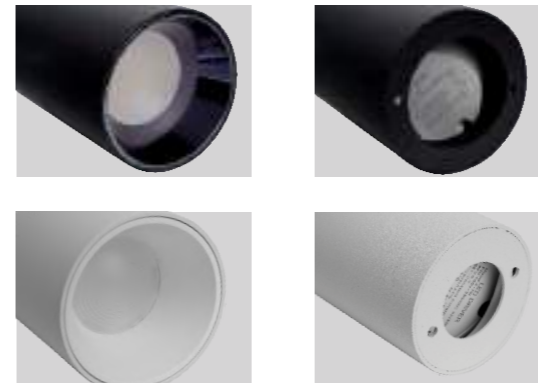





**LED PENDANT LIGHTS**

**Technical light**



Cooperative brand:




**LD-12-440**

**DATA SHEET**

Wattage	5W
Lumen Flux	355LM
Color Temperature	3000K/4000K/6000K
Beam Angel	100°
Housing Color	Matte Black
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

**DETAILS**

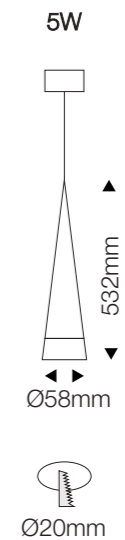


# LED PENDANT LIGHTS

## LD-12-525



Modern Pendant Light Fixtures with the Simple yet Elegant design gives you a fashionable home atmosphere. Luminous angle can be adjusted from 60 degrees to 18 degrees, the wide-to-narrow beam zoom. Pendant Light Fixture is adjustable from 4''-50'' in length to meet your different home style needs.

Housing Color  WHITE  BLACK

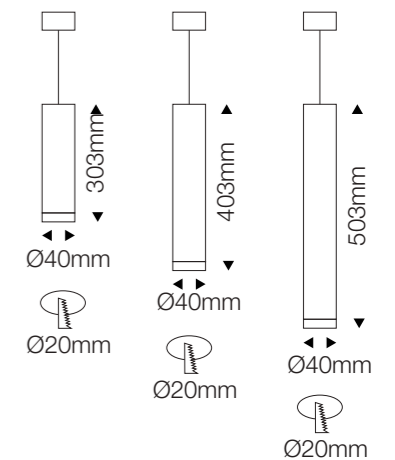


### DETAILS




### DATA SHEET

Wattage	12W/20W
Lumen Flux	85LM/W
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Kitchen/Bedroom/Restaurant
Dimming Option	TRIAC/0-10V/DALI2

### Luminous Intensity Distribution Curve

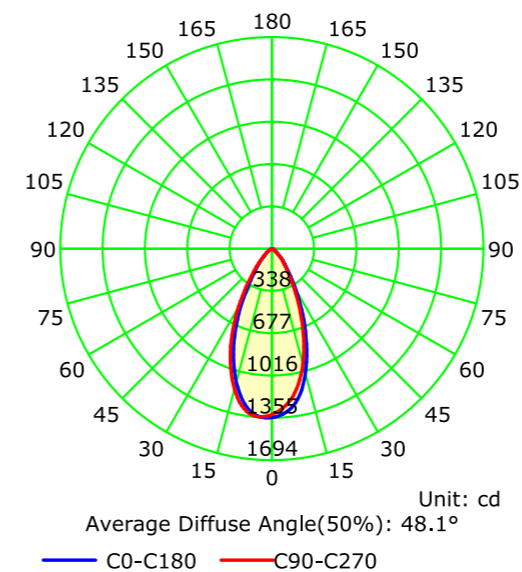

### Illuminance at a Distance

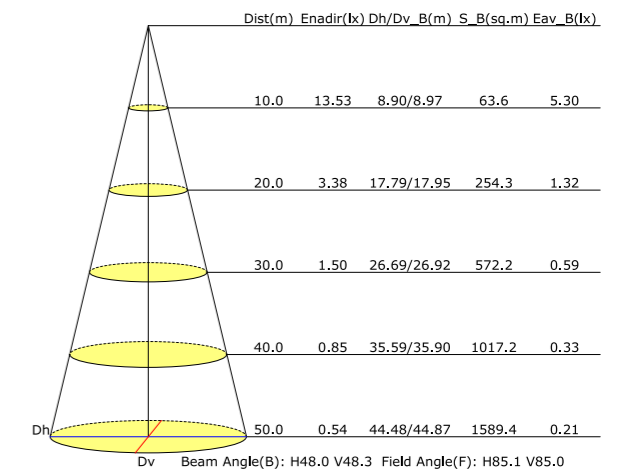




## LD-12-626


### DATA SHEET

Wattage	5W/10W
Lumen Flux	85LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/36°
Housing Color	Black
Inner Ring Color	Gold
LED Light Source	COB
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

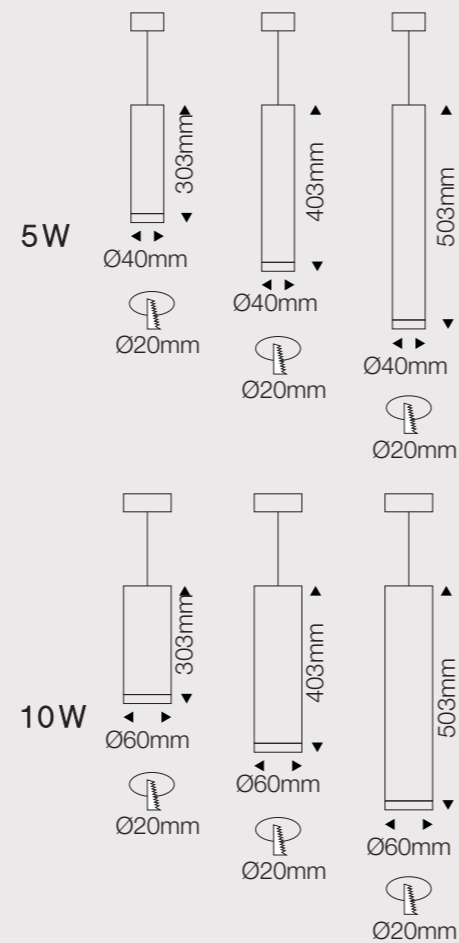

## LD-12-719


### DATA SHEET

Wattage	10W
Lumen Flux	1700LM
Color Temperature	3000K/4000K/6000K
Beam angle	18°-60°
Product Color	White
LED Light Source	COB
Application	Kitchen/Bedroom/Dining Room
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

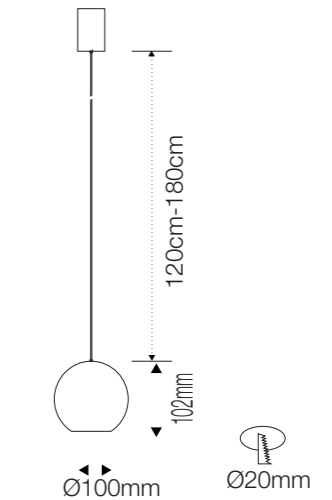






## LD-12-500

### DATA SHEET

Wattage	10W/15W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White/Black/Gold
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

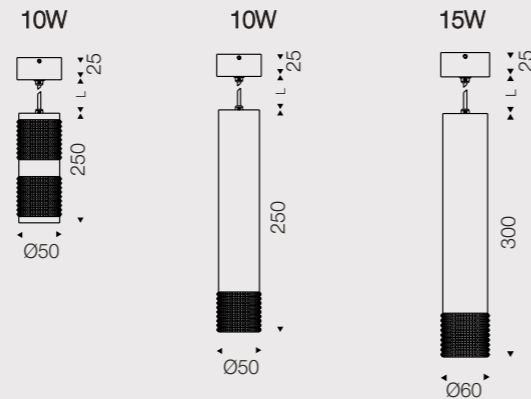

CE CB RoHS BIS




## LD-11-251&LD-12-251


### DATA SHEET

Wattage	5W/10W/15W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/20°/30°
Housing Color	White
LED Light Source	COB
Application	Home/Office/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

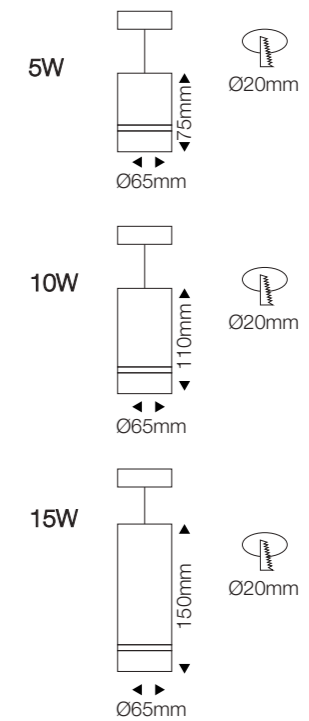

CE CB RoHS BIS


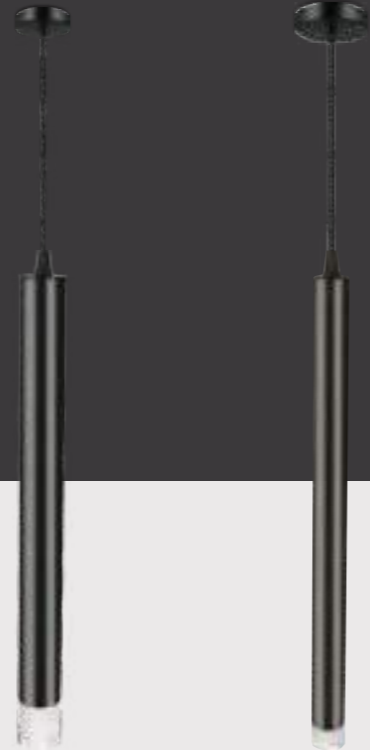


## LD-12-428

### DATA SHEET

Wattage	3W/5W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	110°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Office/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

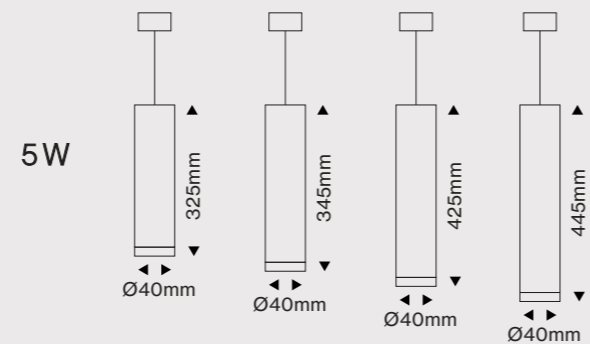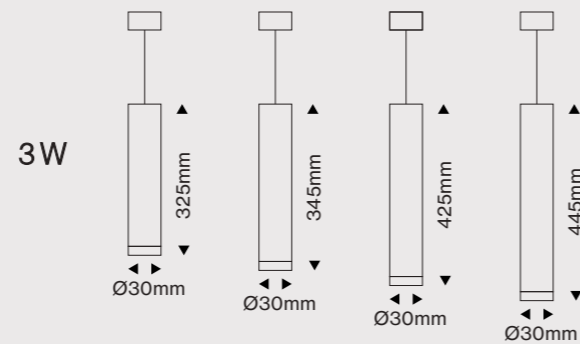


CE CB RoHS BIS

## LD-12-610


### DATA SHEET

Wattage	6W
Lumen Flux	450LM
Color Temperature	3000K/4000K/6000K
Beam Angel	100°
Housing Color	Chrome
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

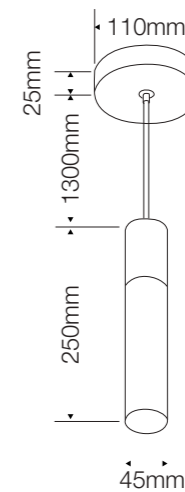

CE CB RoHS BIS

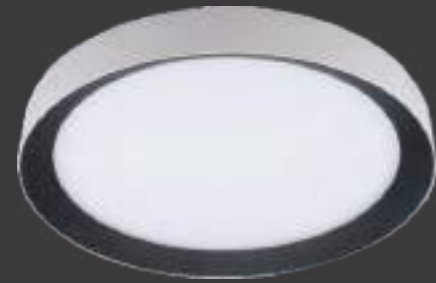


## KL-11-594/KL-12-594

### DATA SHEET

Wattage	12W/18W/24W/
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	110°
Housing Color	White
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

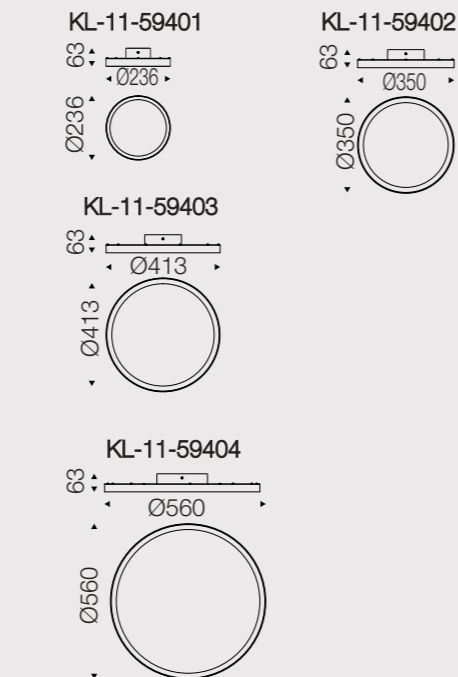




CE CB RoHS BIS

## KL-11-594/KL-12-594



### DATA SHEET

Wattage	3W/5W
Lumen Flux	70LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	110°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Office/Hotel
Dimming Option	TRIAC/0-10V/DALI2


### DETAILS



KL-11-59412



KL-11-59411



CE CB RoHS BIS




## LD-12-806

### DATA SHEET

Wattage	15W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	12°/20°/34°/48°
Housing Color	White
LED Light Source	SMD
Application	Home/Store/Office/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

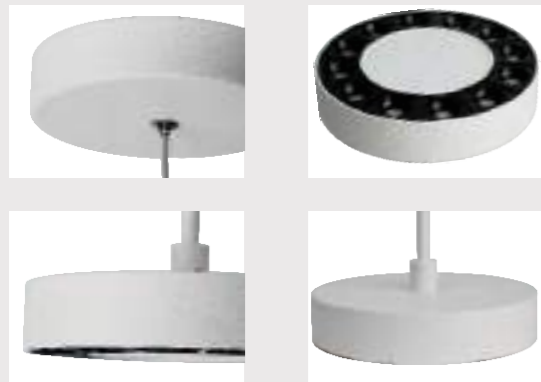

CE CB RoHS BIS



## LD-12-807

### DATA SHEET

Wattage	7W
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/36°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Office/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS








## LD-12-062

### DATA SHEET

Wattage	12W/18W/24W/
Lumen Flux	80LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	110°
Housing Color	White
LED Light Source	SMD2835
Application	Bedroom/Restaurant/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

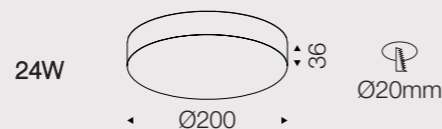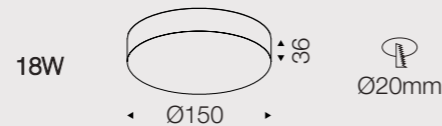

CE CB RoHS BIS



## LED LINEAR LIGHTS

### Technical light



Cooperative brand:





## LD-06-669

CE CB RoHS BIS

### DATA SHEET

Wattage	12W/12W*2/12W*3/12W*4
Lumen Flux	90LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

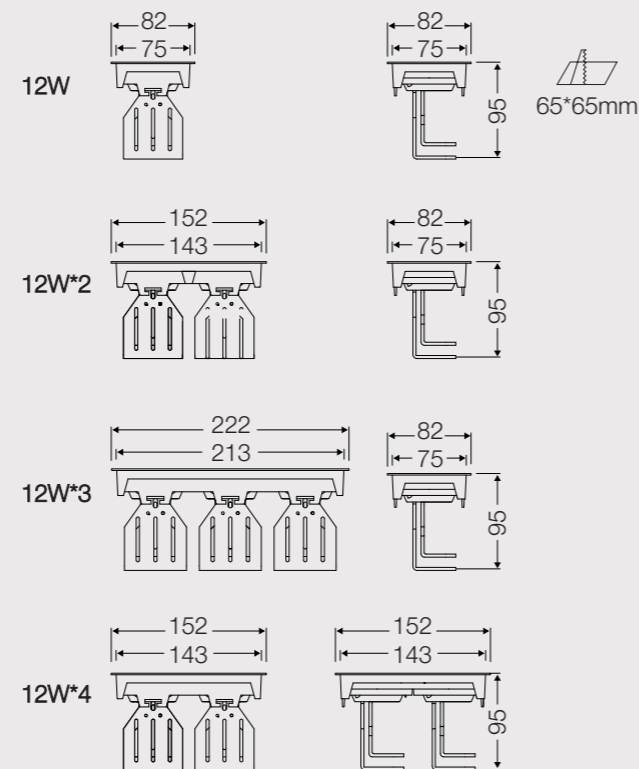


## LD-06-670

CE CB RoHS BIS

### DATA SHEET


Wattage	12W/12W*2/12W*3/12W*4
Lumen Flux	90LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	15°/24°/38°
Housing Color	White&Black
LED Light Source	COB
Application	Home/Store/Gallery/Museum
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS

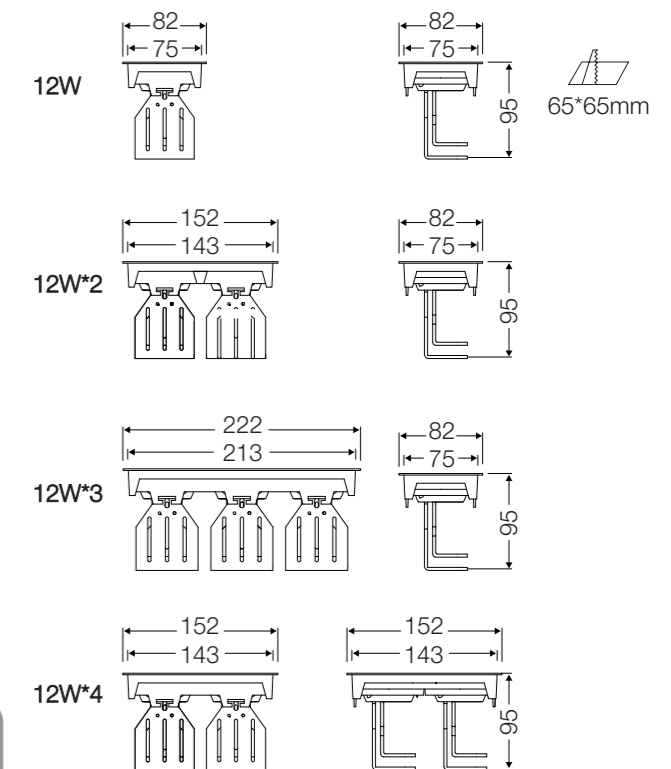

## LED LINEAR LIGHTS

### LD-14-570

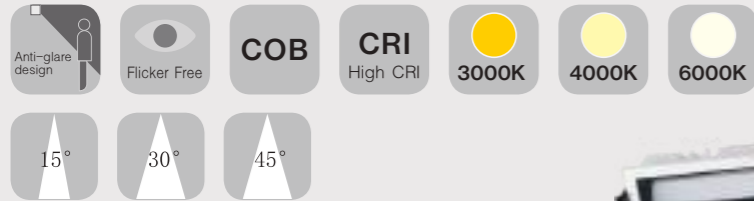

Effective focus Angle specially designed for background wall lighting. Aluminum alloy lamp body high density aluminum alloy shell, light weight, high temperature baking process, strong surface texture.

Housing Color:  WHITE  
 Inner Ring Color:  BLACK




## DETAILS




### DATA SHEET


Wattage	3W/5W/7W/10W/20W/30W
Lumen Flux	70LM/W
Housing Color	White
Inner Ring Color	Black
Material	Aluminum
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

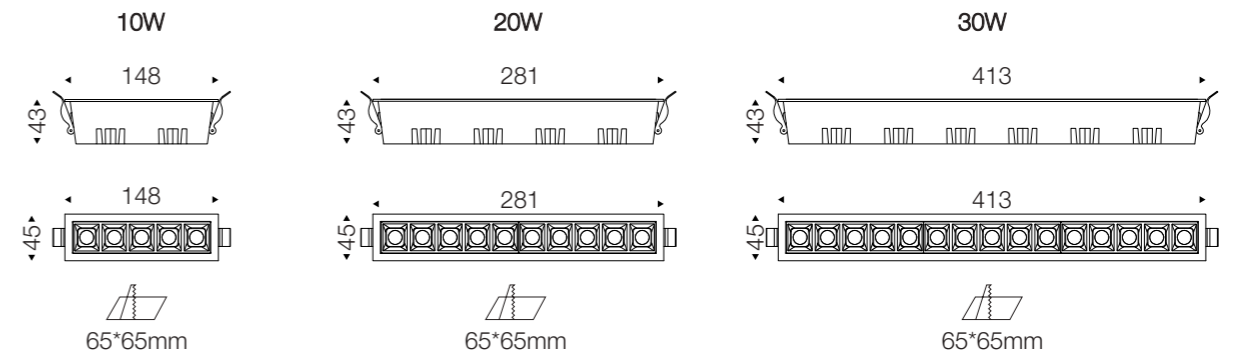

### Luminous Intensity Distribution Curve

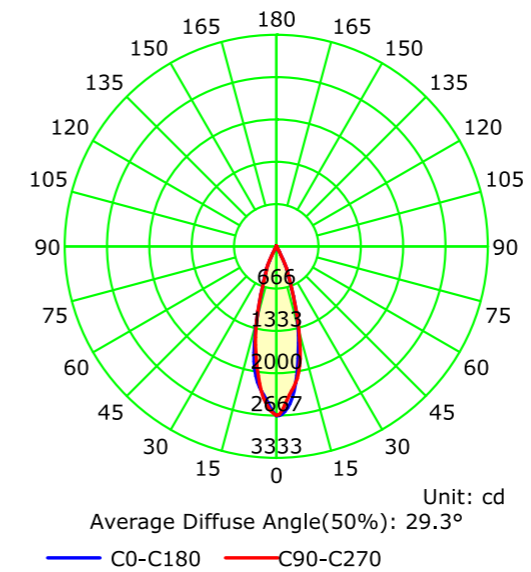

### Illuminance at a Distance

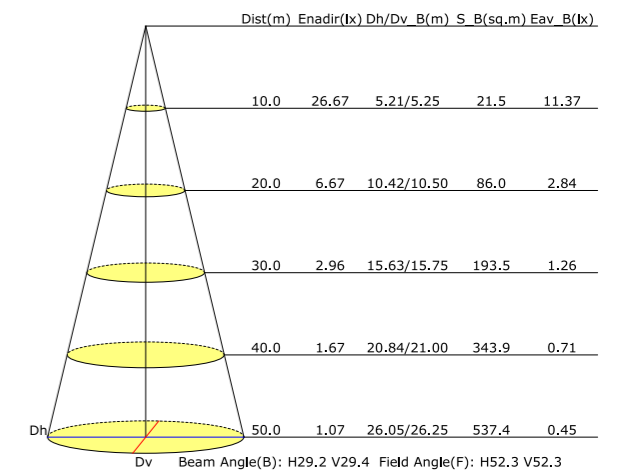



# LED LINEAR LIGHTS

## LD-14-612



Ceto series features a simple yet sophisticated structure that can be seamlessly concealed within the wall, harmonizing to create an ambient atmosphere. Environmentally friendly, it generates neither heat nor radiation, and is designed to be anti-glare.

Housing Color:  WHITE  BLACK  
 Inner Ring Color:  BLACK





### DETAILS




### DATA SHEET


Wattage	3W/6W/12W/20W
Lumen Flux	45LM/W
Material	Aluminum
Shape	Round/Square
LED Light Source	COB
Life Span	50000hrs
Color Rendering Index	Ra=80/90
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

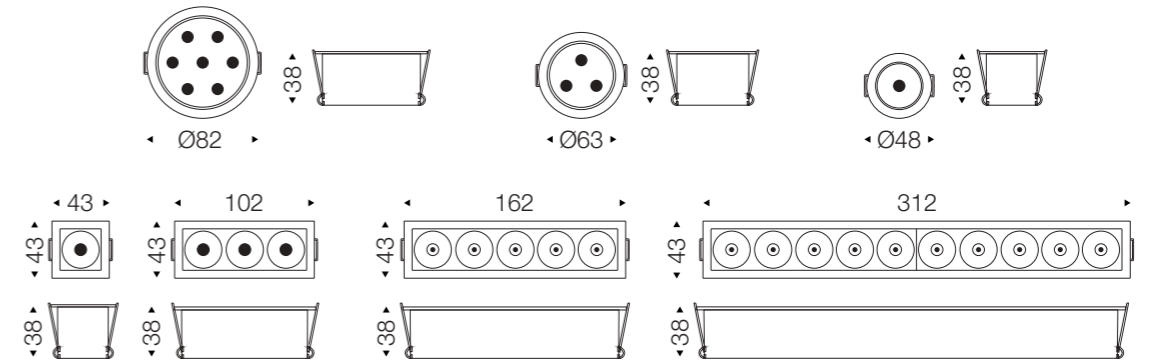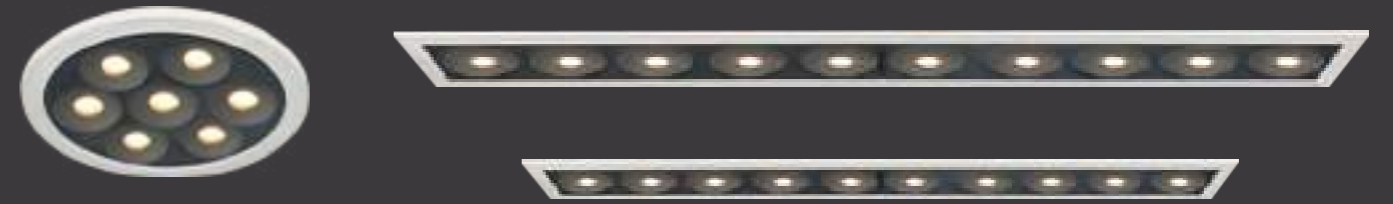

### Luminous Intensity Distribution Curve

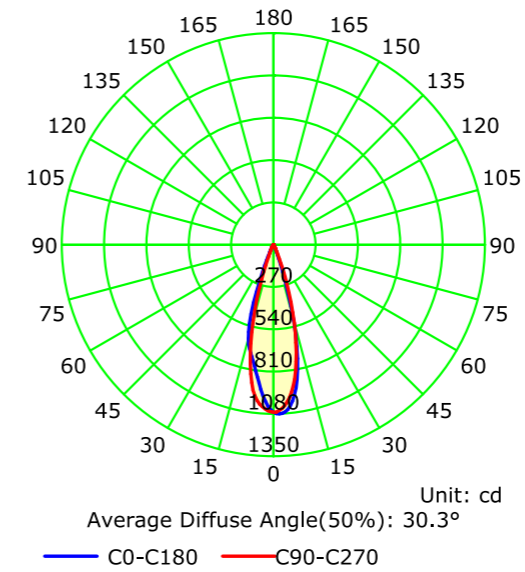

### Illuminance at a Distance

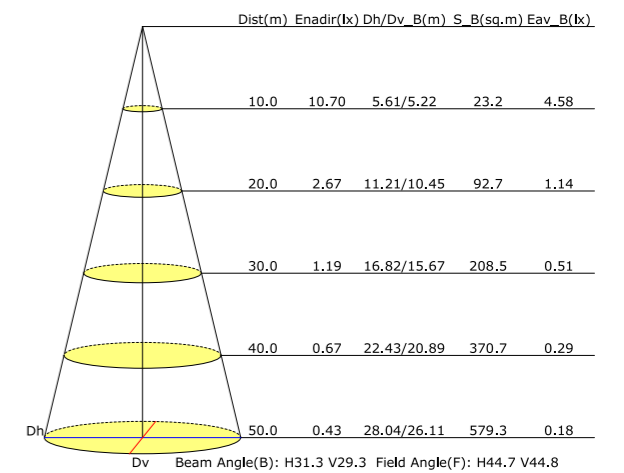



## LD-14-611




### DATA SHEET

Wattage	6W/10W/20W
Lumen Flux	60LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	24°/36°
Housing Color	White/Black
Inner Ring Color	Black
LED Light Source	COB
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

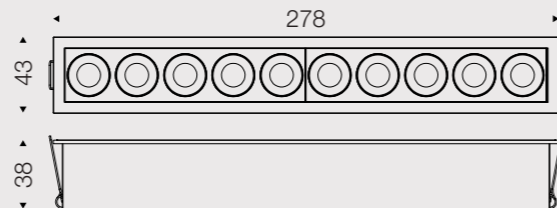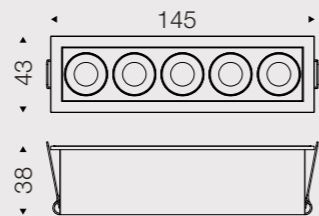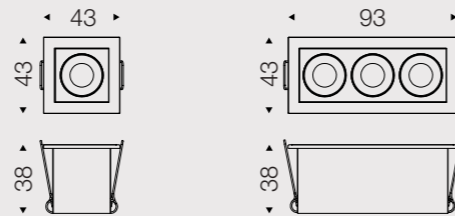

## LD-06-641







### DATA SHEET

Wattage	7W/12W/20W/7W*2/12W*2/20W*2
Lumen Flux	100LM/W
Color Temperature	3000K/4000K/6000K
Beam Angel	10°/15°/24°/38°/50°
Housing Color	White/Black
Inner Ring Color	Black
LED Light Source	COB
Application	Office/Home/Store/Hotel
Dimming Option	TRIAC/0-10V/DALI2

### DETAILS



CE CB RoHS BIS

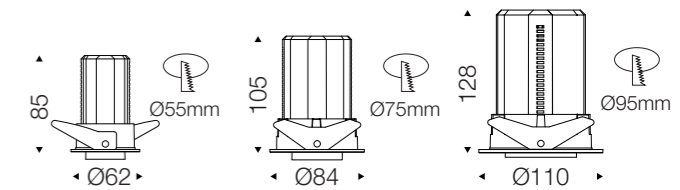

## Magnetic Grille Light

# MAGNETIC TRACK LIGHTING

TRACKS  
LUMINAIRES  
ACCESSORIES  
MOUNTING OPTIONS




LD-15-66401-001

Wattage	6W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	White&Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	112*22*43mm




LD-15-66402-001

Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	White&Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	220*22*43mm




LD-15-66403-001

Wattage	18W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	White&Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	328*22*43mm




LD-15-66404-001

Wattage	24W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	White&Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	436*22*43mm





## Magnetic Linear Light

CE CB RoHS BIS

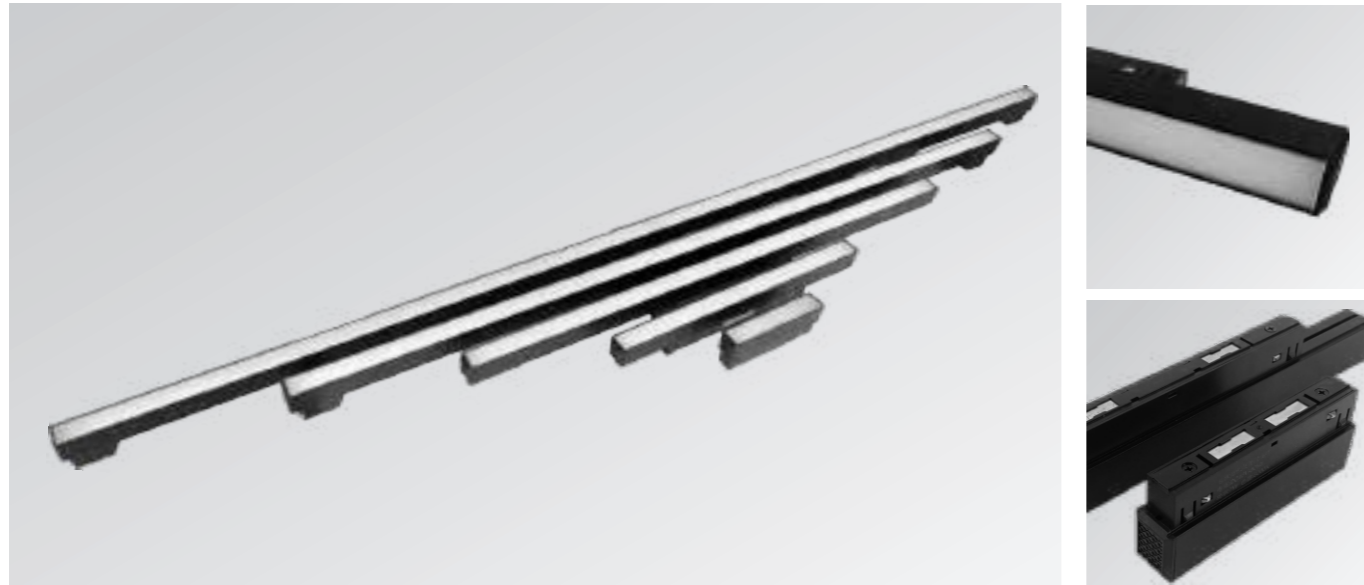


**LD-15-66301-001**

Wattage	7W
INPUT	DC 48V
Lumen Flux	80LM/W
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	112*22*43mm




**LD-15-66302-001**

Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	300*22*43mm





**LD-15-66303-001**

Wattage	20W
INPUT	DC 48V
Lumen Flux	80LM/W
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	600*22*43mm




**LD-15-66304-001**

Wattage	30W
INPUT	DC 48V
Lumen Flux	80LM/W
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	900*22*43mm



**LD-15-66305-001**

Wattage	40W
INPUT	DC 48V
Lumen Flux	80LM/W
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	1200*22*43mm




## Magnetic Folding Light

CE CB RoHS BIS




**LD-15-66501-001**

Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	112*24*145mm



**LD-15-66502-001**



Wattage	24W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	220*24*145mm





## Magnetic Pendant Light

CE CB RoHS   BIS

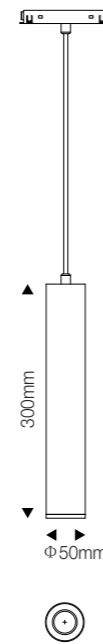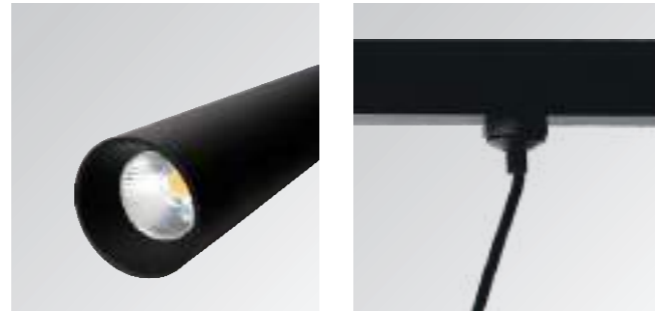


LD-15-66701-001

Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	50*H300mm


## Magnetic Spotlight

CE CB RoHS   BIS


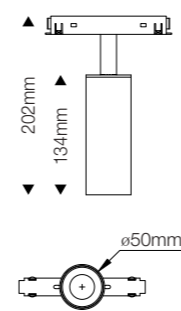


LD-15-66601-001



Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	120*110*H82mm

 Prevent board cracking

INSTALLATION METHOD  
Embedded installation  
Concealed installation

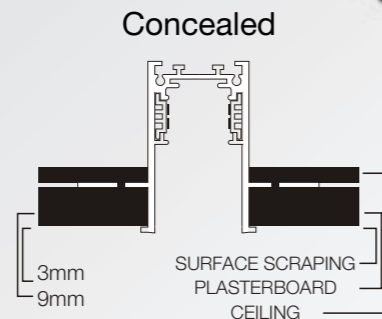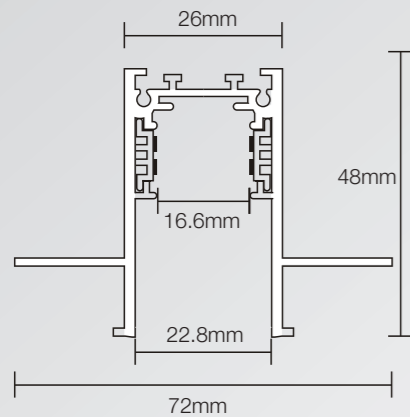

INSTALLATION METHOD  
Embedded installation  
Concealed installation

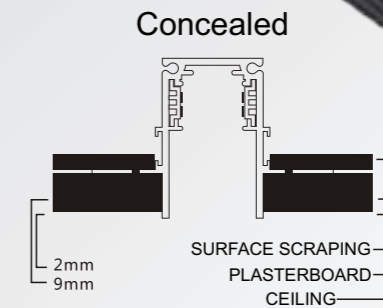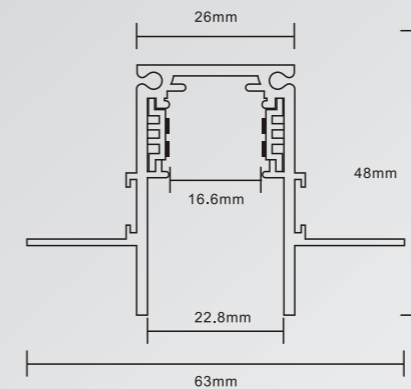

**HORIZONTAL CORNER  
CONCEALED TRACK**

SIZE: 85x85mm

Horizontal corner 90° ceiling corner use



**VERTICAL CORNER  
CONCEALED TRACK**

SIZE: 85x85mm

Vertical corner 90° ceiling and side wall corner use



**HORIZONTAL CORNER  
CONCEALED TRACK**

SIZE: 85x85mm

Horizontal corner 90° ceiling corner use




**VERTICAL CORNER  
CONCEALED TRACK**

SIZE: 85x85mm

Vertical corner 90° ceiling and side wall corner use

**Plastering Flush Mounted  
Magnetic Track**


CE CB RoHS   BIS

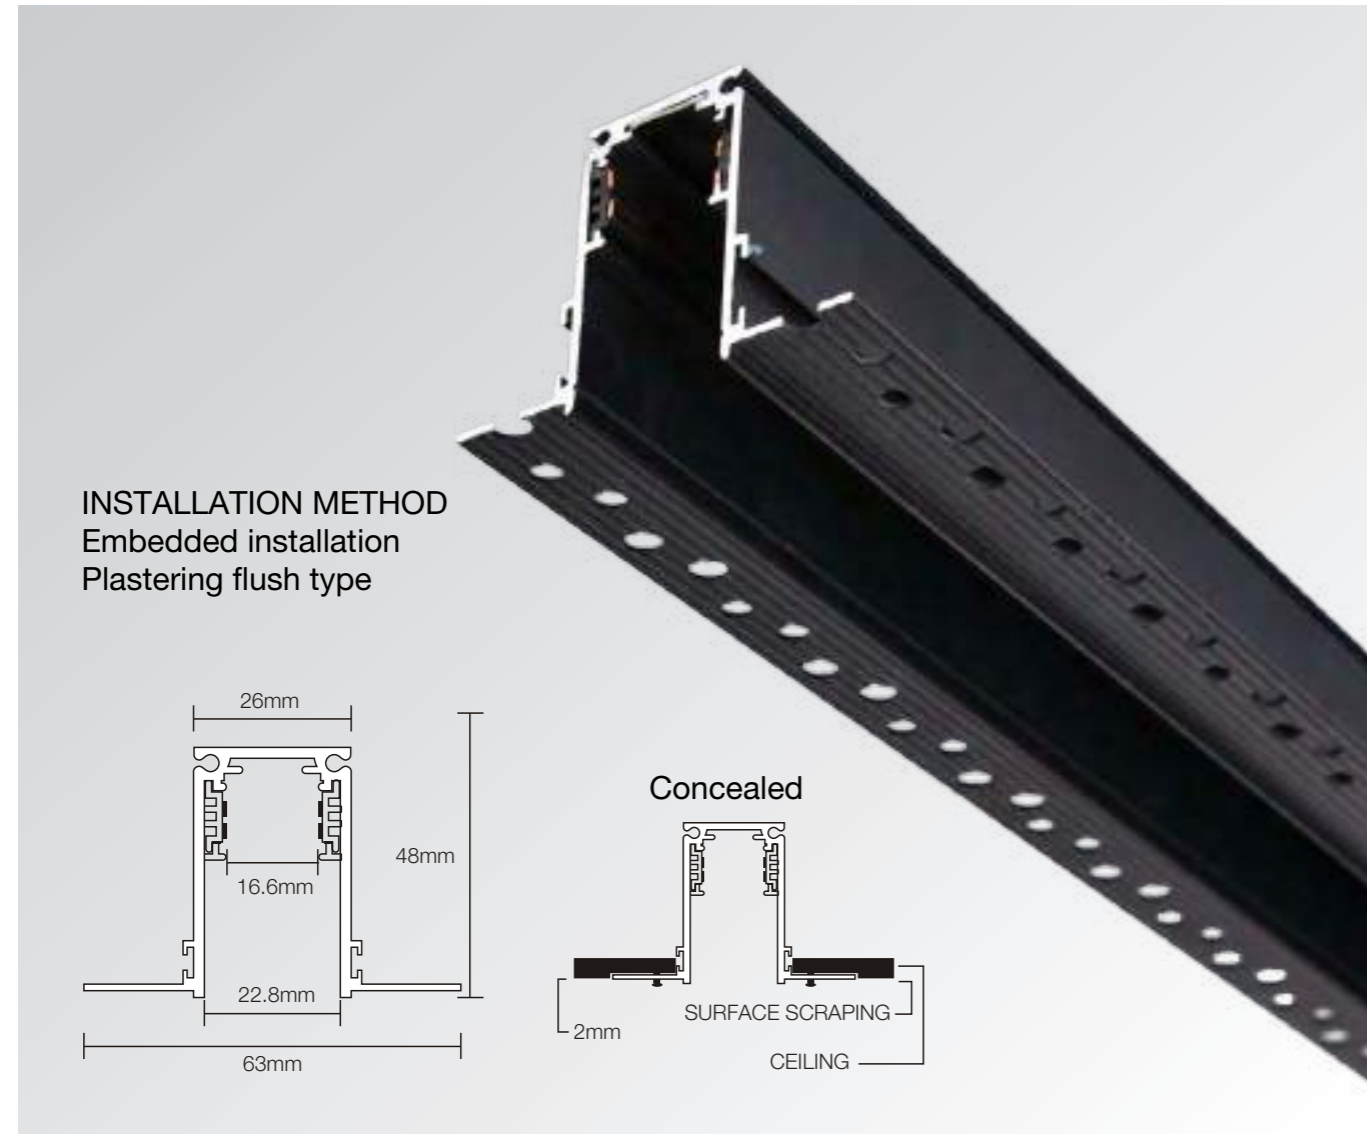

INSTALLATION METHOD  
Embedded installation  
Plastering flush type

**Surface Mounted Magnetic Track**

CE CB RoHS   BIS

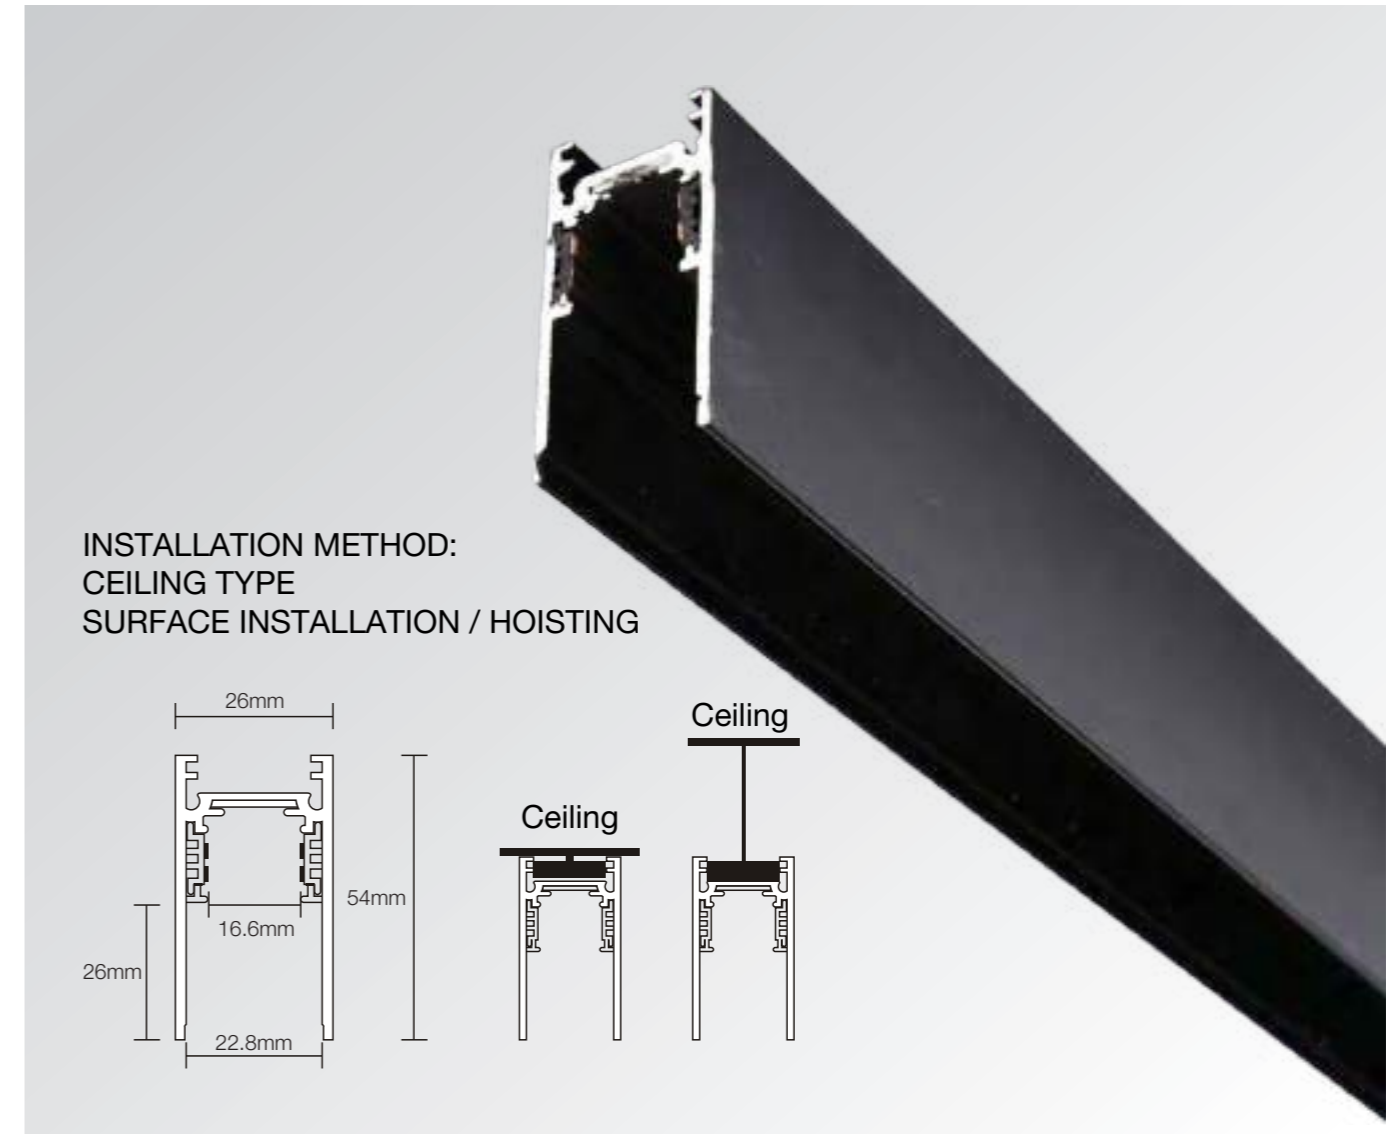

INSTALLATION METHOD:  
CEILING TYPE  
SURFACE INSTALLATION / HOISTING



**HORIZONTAL CORNER  
BATCH TRACK**  
SIZE : 85x85mm

Horizontal corner 90° ceiling corner use



**VERTICAL CORNER  
BATCH TRACK**  
SIZE : 85x85mm

Vertical corner 90° ceiling and side wall corner use



**HORIZONTAL CORNER  
BATCH TRACK**  
SIZE : 85x85mm

Horizontal corner 90° ceiling corner use



**VERTICAL CORNER  
BATCH TRACK**  
SIZE : 85x85mm

Vertical corner 90° ceiling and side wall corner use



**Magnetic Power**

CE CB RoHS BIS



**48V DC Power Supply**

Wattage 100W  
INPUT DC 48V  
Housing Color Black  
Size L230\*22\*43mm



**48V DC Power Supply**

Wattage 200W  
INPUT DC 48V  
Housing Color Black  
Size L350\*22\*43mm

**Magnetic Accessories**

CE CB RoHS BIS



**Input power connector**

INPUT DC 48V  
Size 570\*17\*H17mm



**"I" Type power connector**

INPUT DC 48V  
Size 342\*17\*H17mm



**Batten Standard(Lighting)**

INPUT DC 48V  
Size 175\*17\*H17mm



**Surface&Pendant Accessories**

INPUT DC 48V  
Size 80\*22.5\*1.5mm




**Surface mounted connecting piece**

INPUT DC 48V  
Size 80\*23\*2mm




**Concealed mounted connecting piece**

INPUT DC 48V

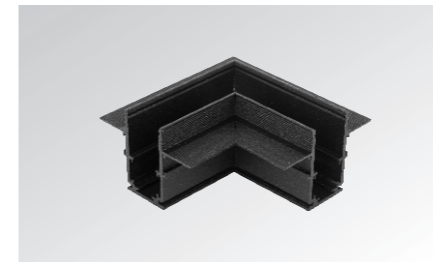

**Corner Connector**

INPUT DC 48V  
Size 100\*100\*W69\*H48mm

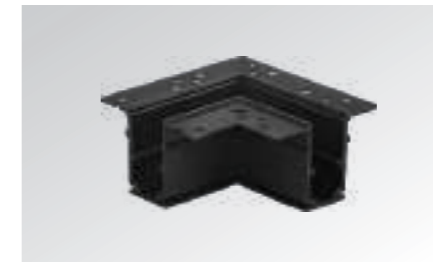


**Corner Connector**

INPUT DC 48V  
Size 100\*100\*W69\*H48mm



**Corner Connector**

INPUT DC 48V  
Size 100\*100\*51.5mm

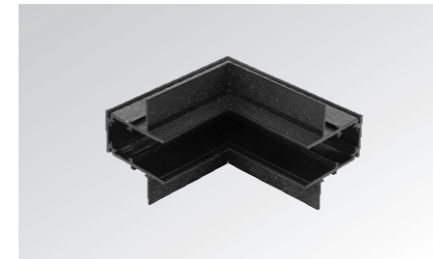


**Vertical Corner Connector**

INPUT DC 48V  
Size 100\*100\*W69\*H48mm



**Vertical Corner Connector**

INPUT DC 48V  
Size 100\*100\*W69\*H48mm

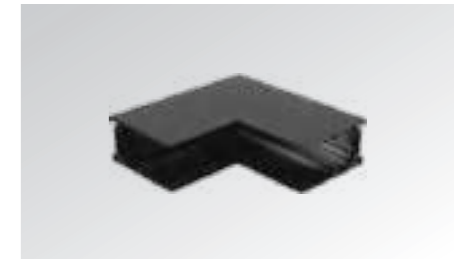

**Vertical Corner Connector**

INPUT DC 48V  
Size 100\*100\*27mm



**Curve Magnetic Track**



CE CB RoHS BIS

**CURVE  
MAGNETIC  
TRACK LIGHTING**

TRACKS  
LUMINAIRES  
ACCESSORIES  
MOUNTING OPTIONS




High quality LED light

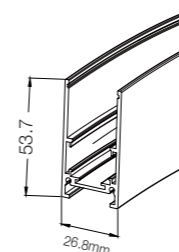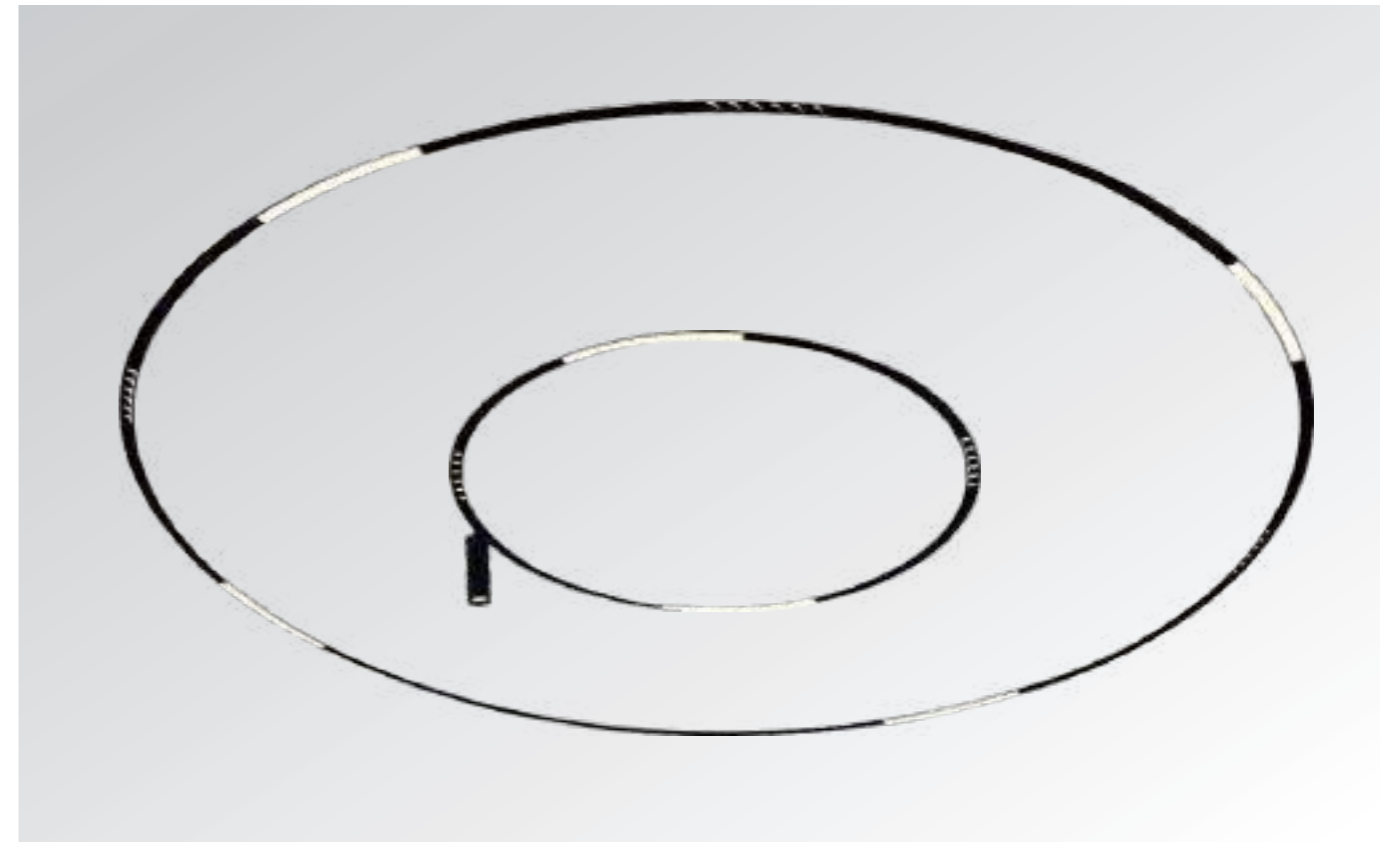

**LD-15-67702**


Color Black  
Lamp Size 26.8\*H53.7mm  
Fitting 6063-T5

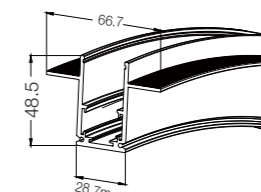

**LD-15-67701**


Color Black  
Lamp Size 66.7\*H48.5mm  
Fitting 6063-T5

## Magnetic Spotlight

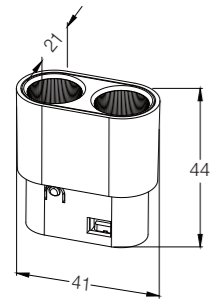

LD-15-67801


POWER	3W
CCT	3000K/4200K/6000K
BEAM ANGLE	24°
LUMEN	65lm/W
SIZE(mm)	41*21*45MM

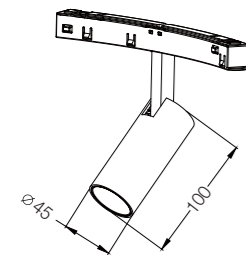

LD-15-68001

POWER	12W
CCT	3000K/4200K/6000K
BEAM ANGLE	24°
LUMEN	80lm/W
SIZE(mm)	45*100MM

CE CB RoHS BIS

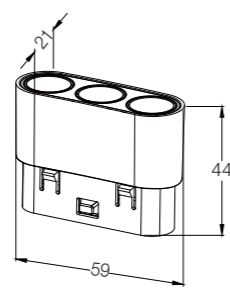

LD-15-67802

POWER	4.5W
CCT	3000K/4200K/6000K
BEAM ANGLE	24°
LUMEN	70lm/W
SIZE(mm)	60*21*45MM

## Magnetic Curve Linear Light



CE CB RoHS BIS

LD-15-67901

POWER	15W
CCT	3000K/4200K/6000K
BEAM ANGLE	120°
LUMEN	80lm/W
SIZE(mm)	600*16*45MM





**Magnetic Power**

CE CB RoHS   BIS



48V DC Power Supply	
Wattage	100W
INPUT	DC 48V
Housing Color	Black
Size	L230*22*43mm



48V DC Power Supply	
Wattage	200W
INPUT	DC 48V
Housing Color	Black
Size	L350*22*43mm

**Magnetic Accessories**

CE CB RoHS   BIS



Input power connector	
INPUT	DC 48V
Size	570*17*H17mm



Vertical Type power connector	
INPUT	DC 48V
Size	342*17*H17mm

# ULTRA THIN MAGNETIC TRACK LIGHTING

TRACKS  
LUMINAIRES  
ACCESSORIES  
MOUNTING OPTIONS




CE CB RoHS BIS

## Magnetic Linear Light




LD-15-72801

Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	112*24*145mm



LD-15-72802

Wattage	24W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	220*24*145mm

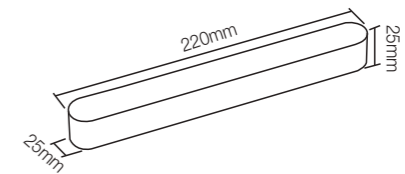





## Magnetic Grille Light


CE CB RoHS   BIS



	<b>LD-15-72901</b>
Wattage	6W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	26*26*120mm




	<b>LD-15-72902</b>
Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	26*26*235mm

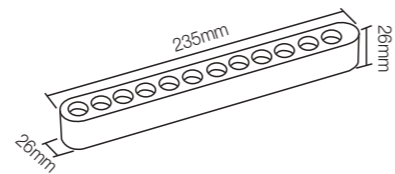



## Magnetic Anti-glare Function Grille Light


CE CB RoHS   BIS



	/
Wattage	6W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	26*26*120mm



	\
Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	26*26*235mm

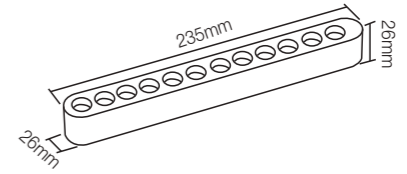


## Magnetic Folding Light

CE CB RoHS   BIS




LD-15-73001

Wattage	6W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	26*90*120mm

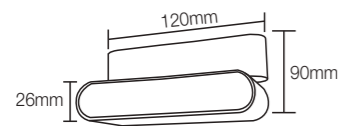

LD-15-73002

Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra=80/90
Size	26*90*235mm

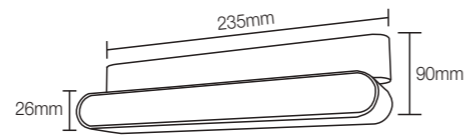


## Magnetic Folding Light

CE CB RoHS   BIS




LD-15-73101

Wattage	6W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	26*90*120mm



LD-15-73102

Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	26*90*235mm

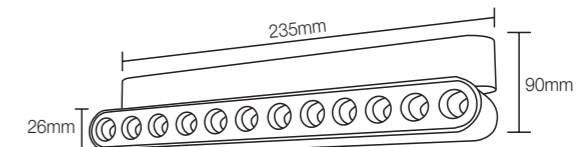


## Magnetic Folding Light

CE CB RoHS   BIS




LD-15-66501-001

Wattage	12W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	112*24*145mm




LD-15-66502-001

Wattage	24W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	220*24*145mm

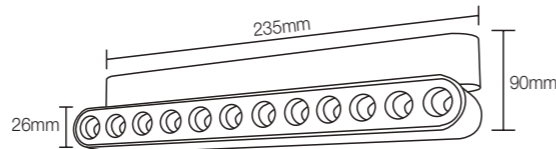

## Magnetic Spotlight

CE CB RoHS   BIS

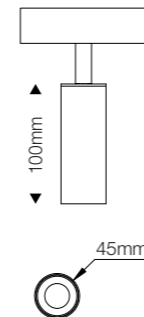


LD-15-73201

Wattage	10W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	Ø45*100mm



**Magnetic Spotlight**


CE CB RoHS   BIS

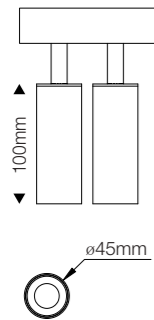

LD-15-73202	
Wattage	2*10W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	Ø45*100mm

**Magnetic Spotlight**


CE CB RoHS   BIS



LD-15-73203	
Wattage	10W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	Ø55*53mm

**Magnetic Pendant Light**

CE CB RoHS   BIS


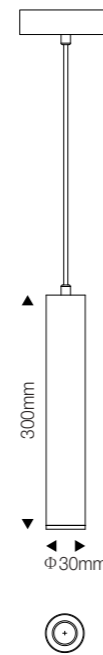


**LD-15-73701**

Wattage	8W
INPUT	DC 48V
Lumen Flux	30LM/W
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	Ø30*300mm

**Magnetic Pendant Light**

CE CB RoHS   BIS


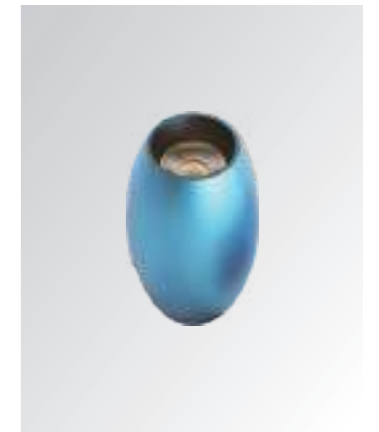


**LD-15-73401**

Wattage	12W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	Ø70*120mm

## Magnetic Spotlight

CE CB RoHS   BIS

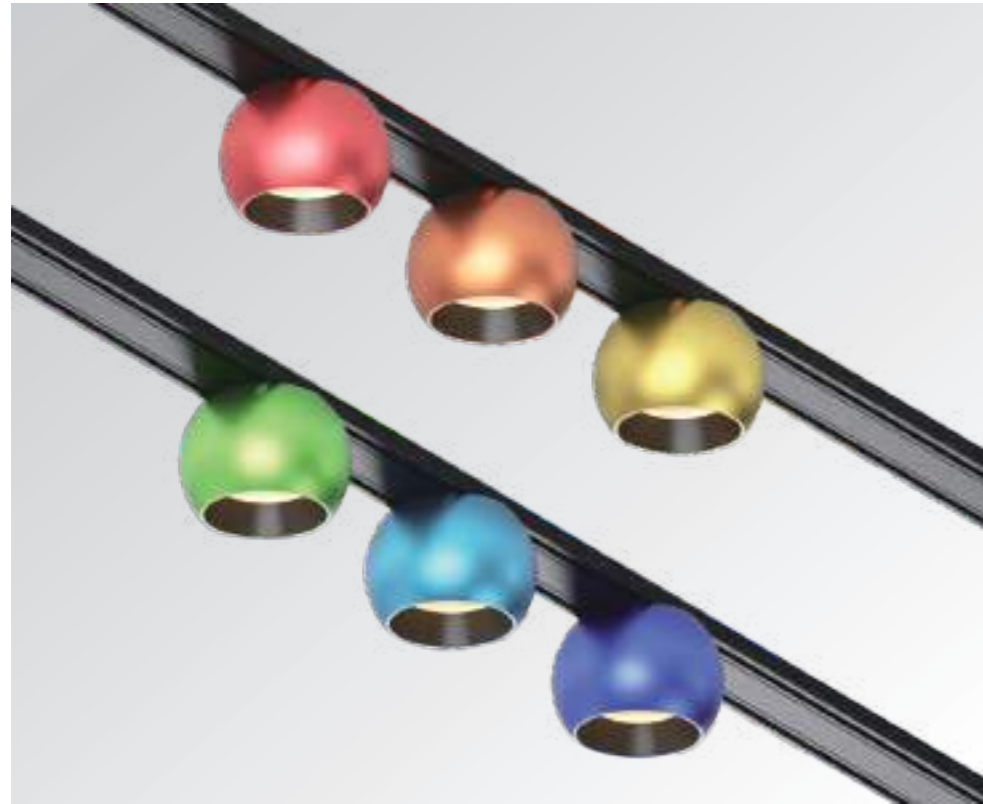


LD-15-73301

Wattage	12W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	Ø50*35mm

## Magnetic Wall Light

CE CB RoHS   BIS

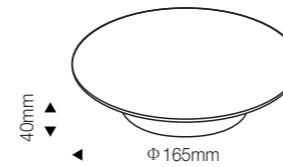




LD-15-73501

Wattage	12W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=80/90
Size	Ø165*40mm



## Magnetic Spotlight

CE CB RoHS BIS

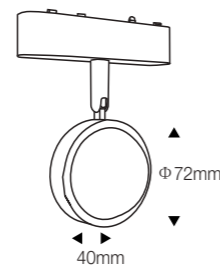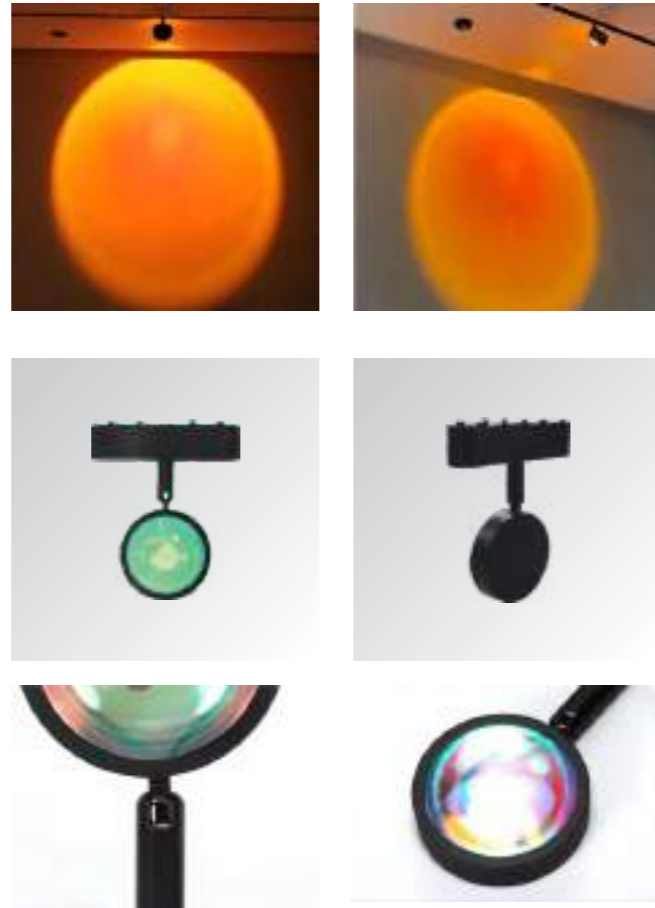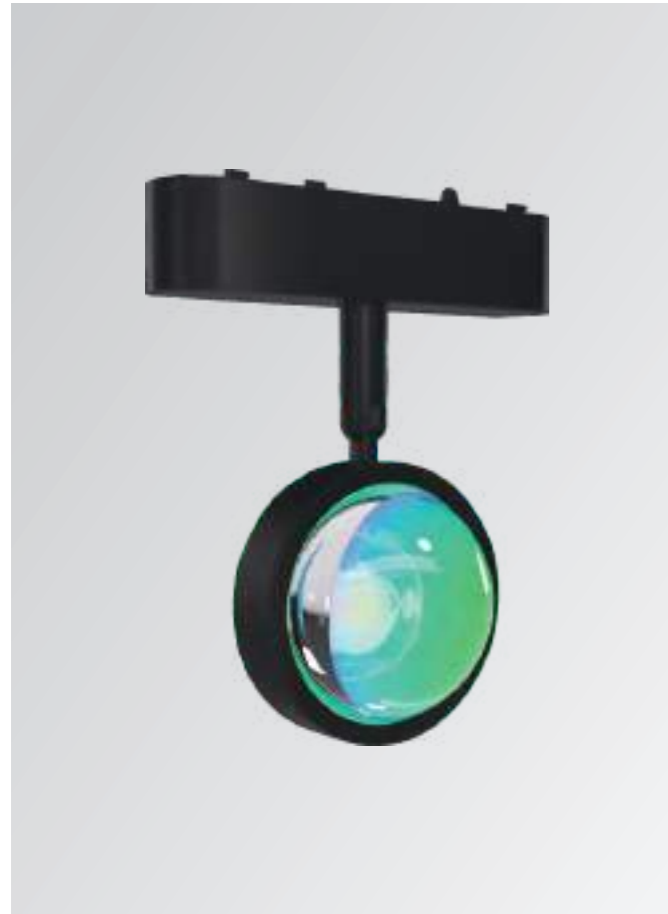

**LD-15-73601**

Wattage	10W
INPUT	DC 48V
Lumen Flux	30LM/W
CCT	3000K/4000K
Beam angle	24°
Color Rendering Index	Ra=90
Size	Ø72*40mm





## Magnetic Track

CE CB RoHS BIS



**Surface Mounted Magnetic Track**


INPUT	DC 48V
Housing Color	Black
Size	26x6mm

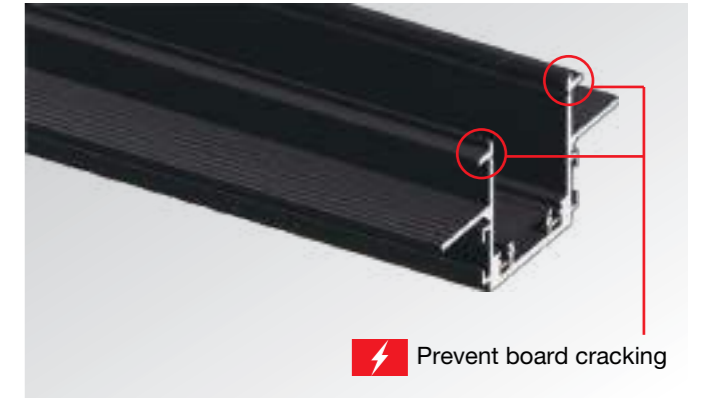

Prevent board cracking



**Concealed Mounted Magnetic Track**

INPUT	DC 48V
Housing Color	Black
Size	66.8x33.6mm




**Concealed Mounted Magnetic Track**

INPUT	DC 48V
Housing Color	Black
Size	66.2x33.6mm

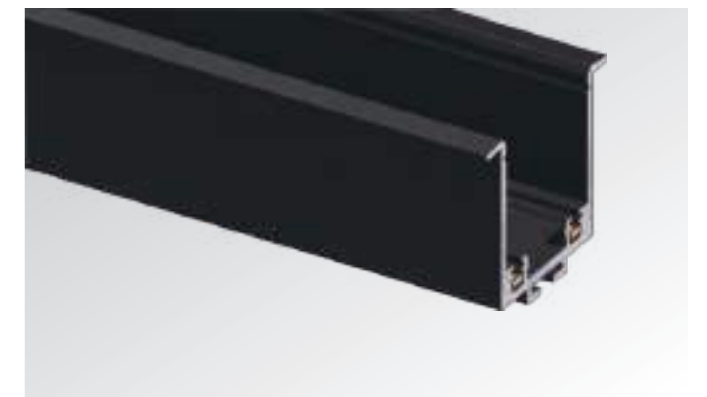

**Surface Mounted Magnetic Track**

INPUT	DC 48V
Housing Color	Black
Size	40.2x33.6mm



**Magnetic Power**

CE CB RoHS   BIS



48V DC Power Supply

Wattage 100W  
INPUT DC 48V  
Housing Color Black  
Size 15\*150mm



48V DC Power Supply

Wattage 200W  
INPUT DC 48V  
Housing Color Black  
Size 15\*250mm


**Magnetic Accessories**

CE CB RoHS   BIS



Wire Box

INPUT DC 48V  
Size 26\*26\*120mm

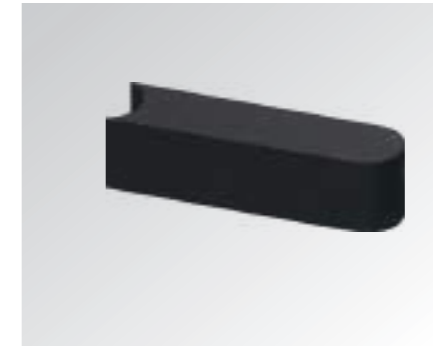

Wire Box

INPUT DC 48V  
Size 26\*26\*103mm




Input power connector

INPUT DC 48V  
Size 15\*50\*L150mm




Corner Connector

INPUT DC 48V  
Size 15\*50\*L150mm

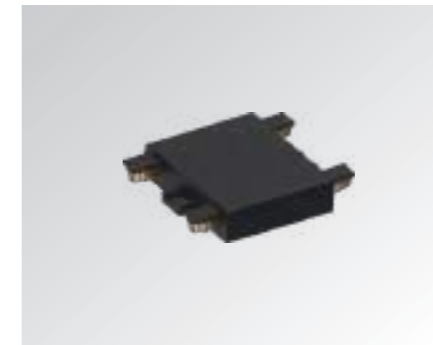

Corner Connector

INPUT DC 48V  
Size 35\*35\*H6mm

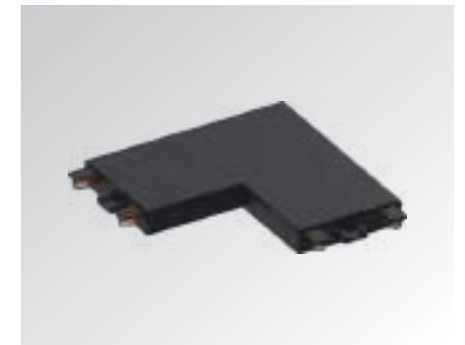


Corner Connector

INPUT DC 48V  
Size 50\*50\*H6mm



Curve Corner Connector

INPUT DC 48V  
Size 50\*50\*H6mm

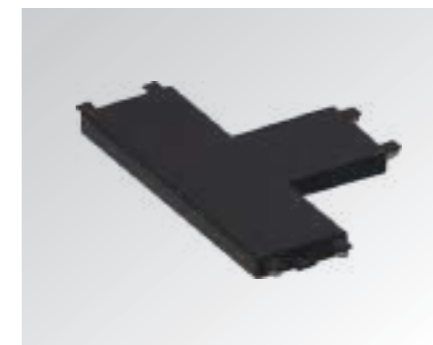

T-type Corner Connector

INPUT DC 48V  
Size 50\*75\*H6mm



Vertical Corner Connector


INPUT DC 48V  
Size 50\*50\*H50mm

# BELT LAMP LIGHTING


Create any lighting scene you desire and be your own lighting designer.

We have incorporated a groundbreaking lighting concept into the design of the belt, integrating materiality and light.

We provide a powerful toolkit for professionals to create personalized lighting effects and unique atmospheres with different lighting fixtures

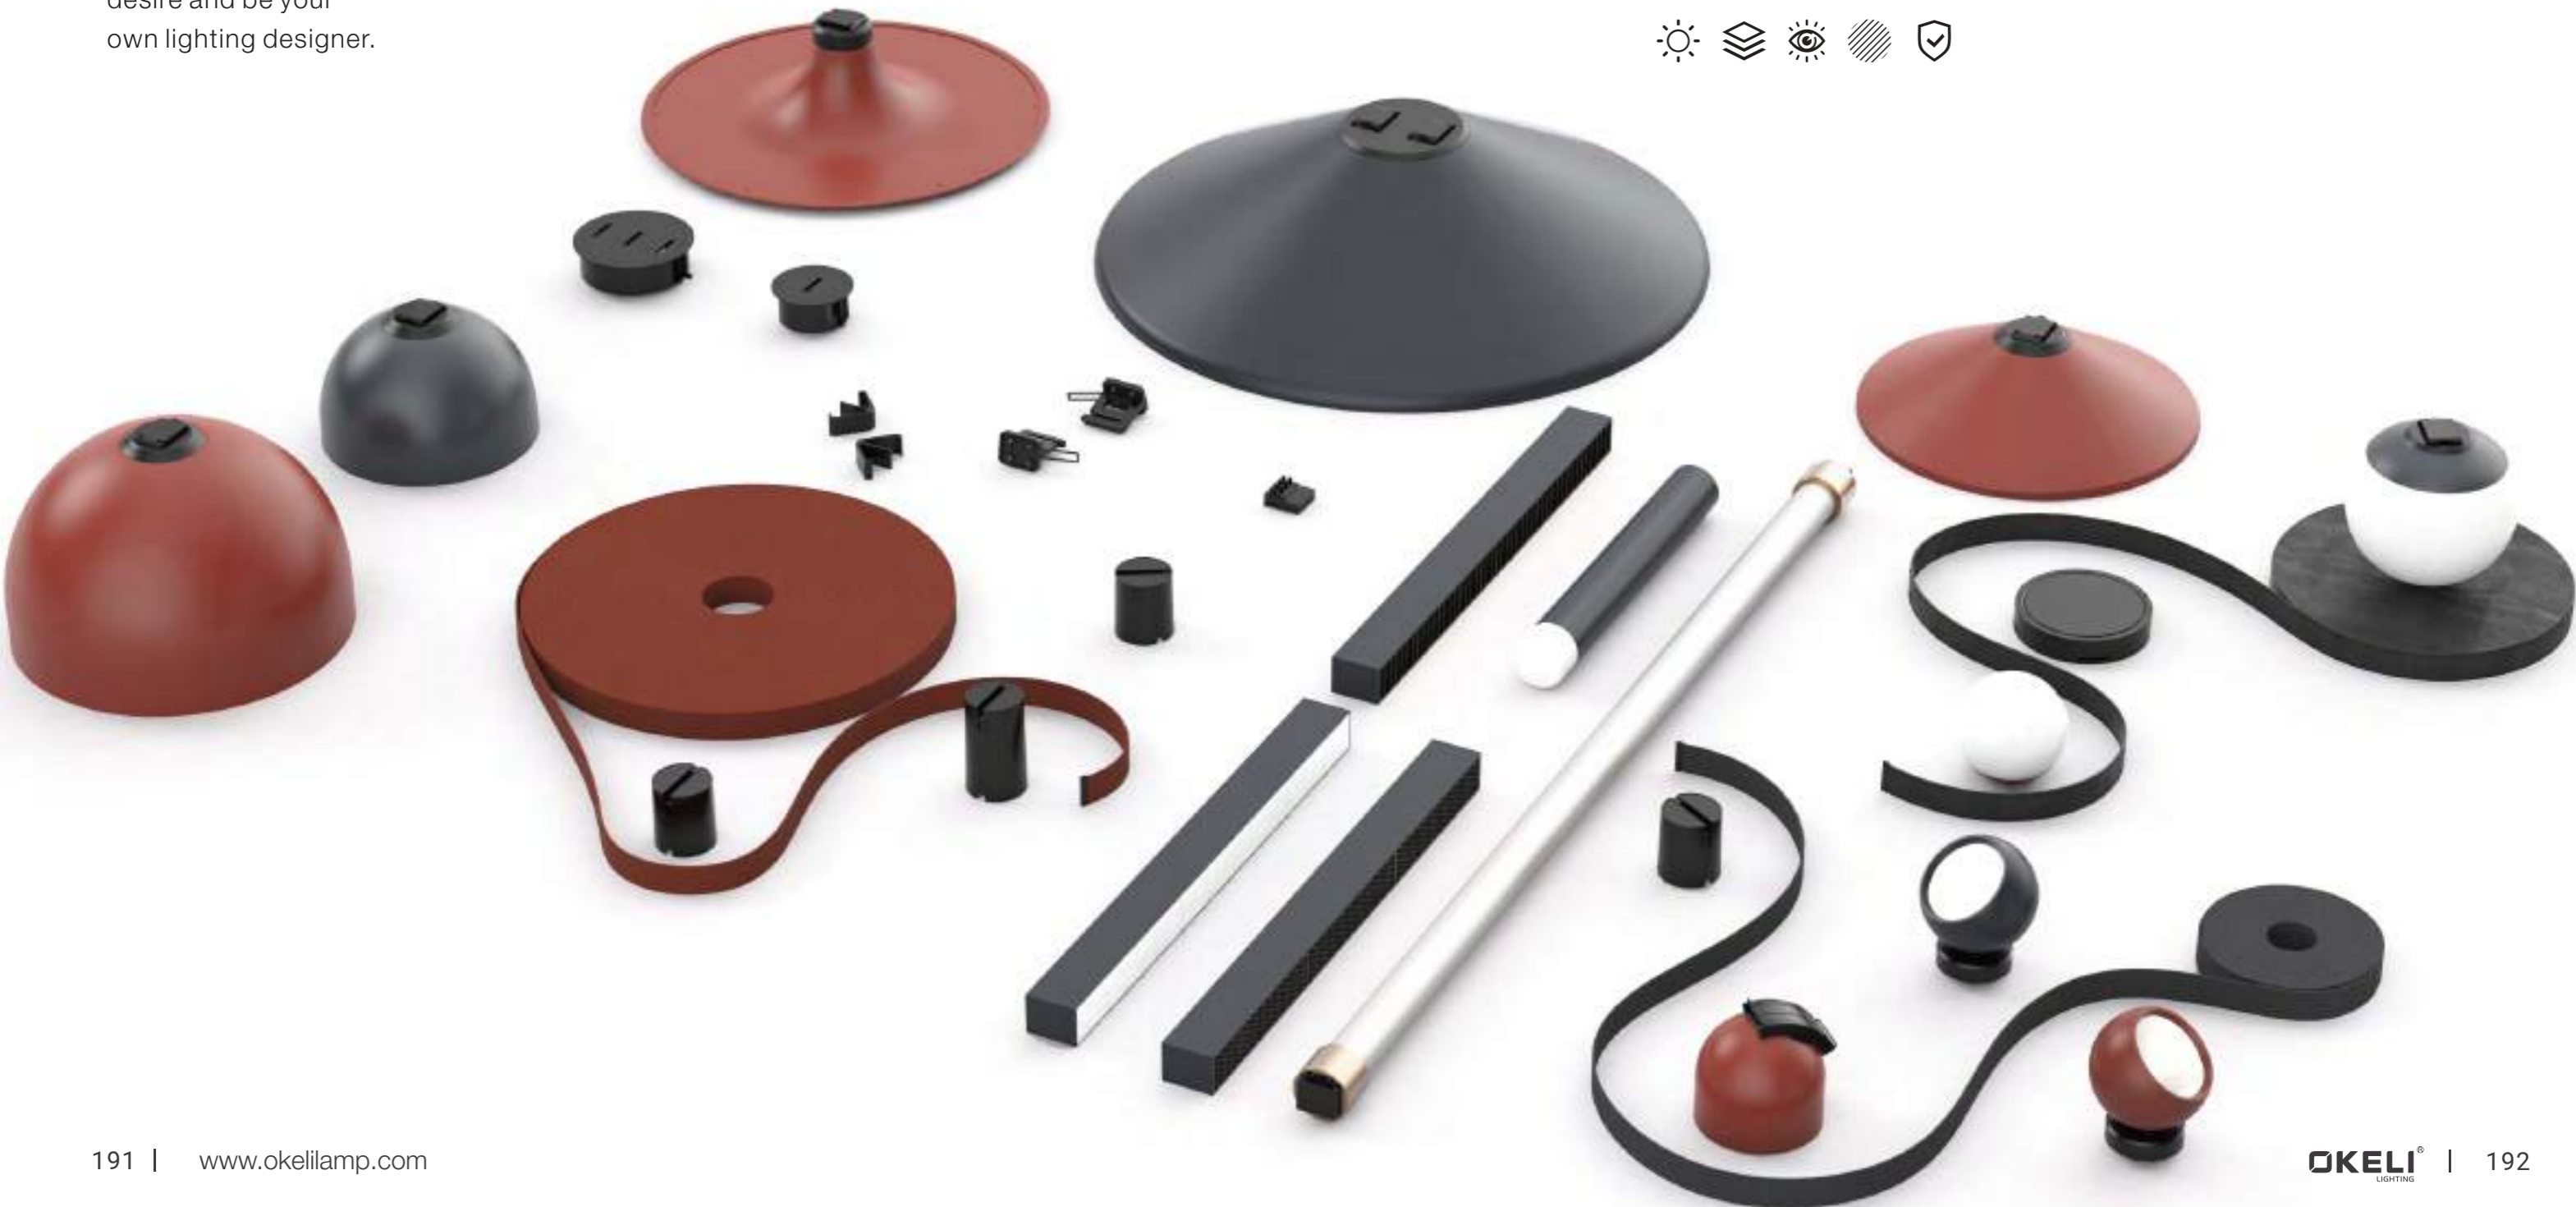



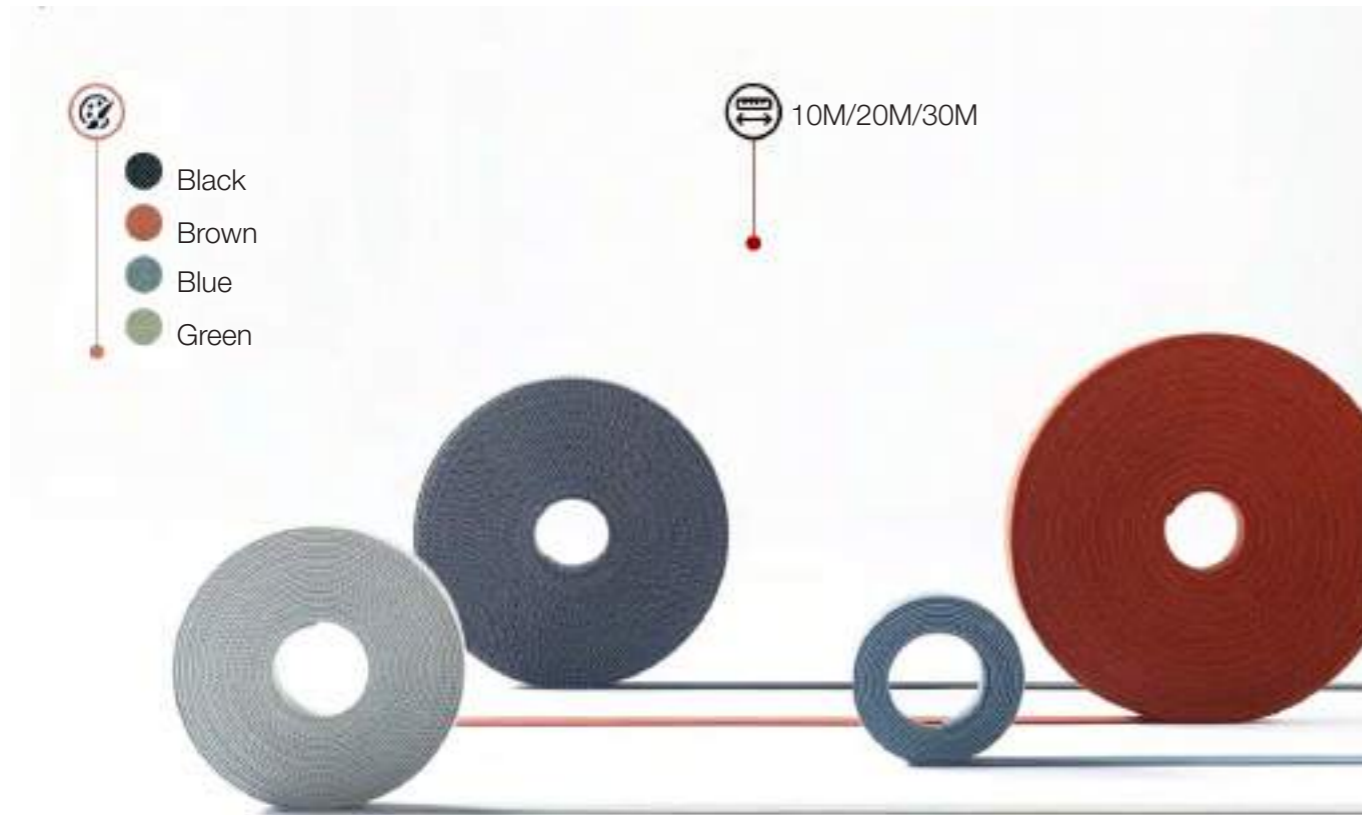


► Play with height and length  
to suit any setting and affix personalised  
belt designs for a one-of-a-kind look






**Linear diffuser**

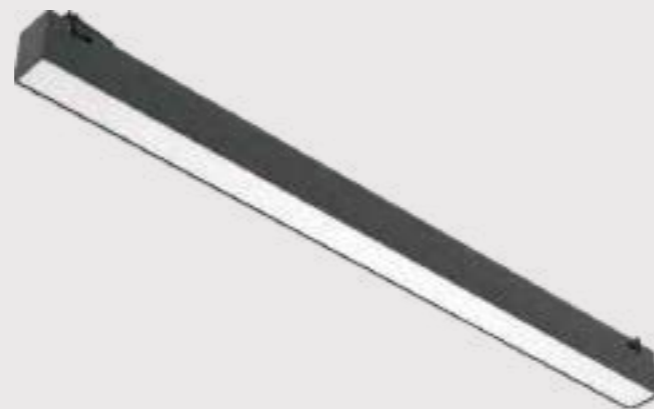


It provides a high range of uniformity on the horizontal plane, and generates the first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in the space, and its component elements do not display visual hierarchies

**LD-15-81501**

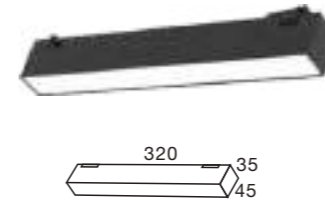


Color: white/black/brown  
 LED: 10W/ 800LM  
 CCT: 3000K/4000K/tunable white  
 CRI: >90  
 Beam: 110°  
 Voltage: DC24V  
 Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81502**

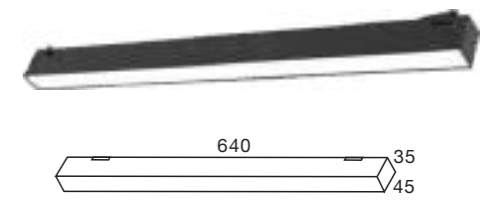


Color: white/black/brown  
 LED: 20W/ 1600LM  
 CCT: 3000K/4000K/tunable white  
 CRI: >90  
 Beam: 110°  
 Voltage: DC24V  
 Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81503**

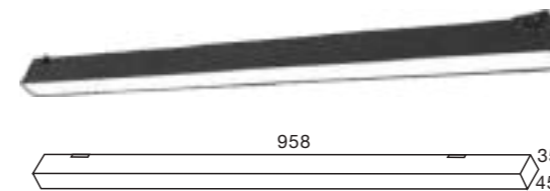

Color: white/black/brown  
 LED: 30W/ 2400LM  
 CCT: 3000K/4000K/tunable white  
 CRI: >90  
 Beam: 110°  
 Voltage: DC24V  
 Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81504**

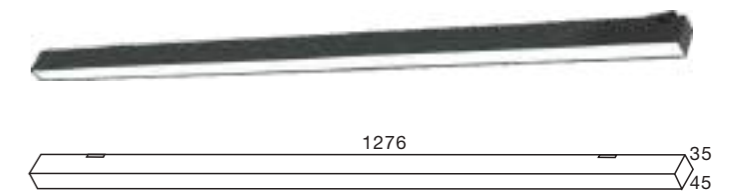


Color: white/black/brown  
 LED: 40W/ 3200LM  
 CCT: 3000K/4000K/tunable white  
 CRI: >90  
 Beam: 110°  
 Voltage: DC24V  
 Dimming options: TRIAC/0-10V/DALI/TUYA

**Linear diffuser**




As an ideal lighting for the workplace, appropriate brightness and clear form with direct lighting, extended beams and high lamp performance gives the light with high energy efficiency and low UGR level below 19

**LD-15-81401**




Color: white/black/brown  
LED: 12W/ 960LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 12°/34°/48°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81402**




Color: white/black/brown  
LED: 24W/ 1900LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 12°/34°/48°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81403**



Color: white/black/brown  
LED: 36W/ 2800LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 12°/34°/48°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81404**




Color: white/black/brown  
LED: 48W/ 3800LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 12°/34°/48°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**Linear diffuser**




Provides medium brightness and clear form. Polarized light, extended beams, and fixture performance give the unit high energy efficiency and low UGR level below 19. It is also ideal for combining the effect of wall washing with background.

**LD-15-81601**




Color: white/black/brown  
LED: 12W/ 960LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: Polarized 20°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81602**




Color: white/black/brown  
LED: 24W/ 1900LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: Polarized 20°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81603**



Color: white/black/brown  
LED: 36W/ 2800LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: Polarized 20°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81604**



Color: white/black/brown  
LED: 48W/ 3800LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: Polarized 20°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA




**Sphere**




**LD-15-82101**

**LD-15-82102**

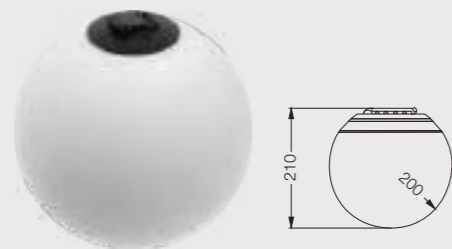

Color: white/black/brown  
LED: 10W/ 600LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 300°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

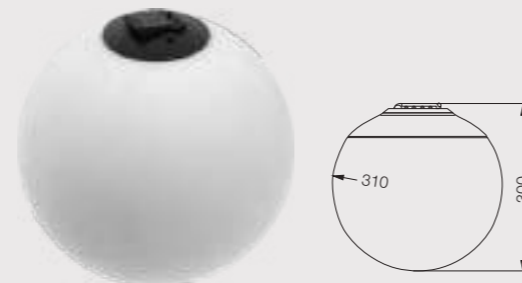

Color: white/black/brown  
LED: 20W/ 1200LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 300°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**Semisphere**




**LD-15-82001**

**LD-15-82002**



Color: white/black/brown  
LED: 10W/ 600LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 110°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

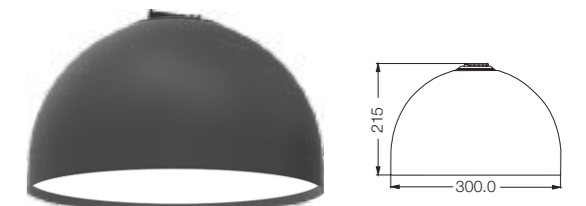

Color: white/black/brown  
LED: 20W/ 1200LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 110°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**Cone light**



**LD-15-82201**



Color: Black/Orange/Green/Blue  
 LED: 18W/ 1080LM  
 CCT: 3000K/4000K  
 CRI: >90  
 Beam: 110°  
 Voltage: DC24V  
 Dimming options: TRIAC/0-10V/DALI/TUYA

**Spot light/Directed diffusion light**




**LD-15-81801**



Color: Black/Orange/Green/Blue  
 LED: 10W/ 600LM  
 CCT: 3000K/4000K  
 CRI: >90  
 Beam: 24°/36°/46°  
 Voltage: DC24V  
 Dimming options: TRIAC/0-10V/DALI/TUYA

**LD-15-81901**

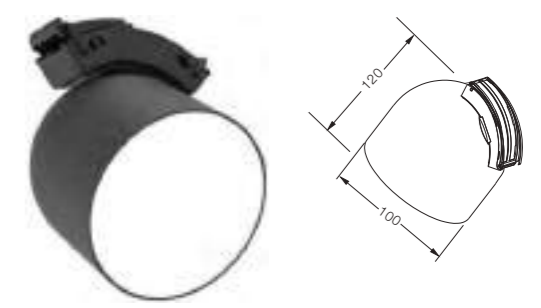

Color: Black/Orange/Green/Blue  
 LED: 10W/ 600LM  
 CCT: 3000K/4000K  
 CRI: >90  
 Beam: 24°/36°/46°  
 Voltage: DC24V  
 Dimming options: TRIAC/0-10V/DALI/TUYA



**Spot light**



**LD-15-81701**

**LD-15-81702**




Color: white/black/brown  
LED: 7W/ 420LM  
Size:  $\Phi 52 \times 120$ mm  
CCT: 3000K/4000K  
CRI: >90  
Beam: 24°/36°/45°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA



Color: white/black/brown  
LED: 12W/ 720LM  
Size:  $\Phi 52 \times 120$ mm  
CCT: 3000K/4000K  
CRI: >90  
Beam: 24°/36°/45°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

**Electrical Connection options**

Choose your preferred installation option according to your needs.

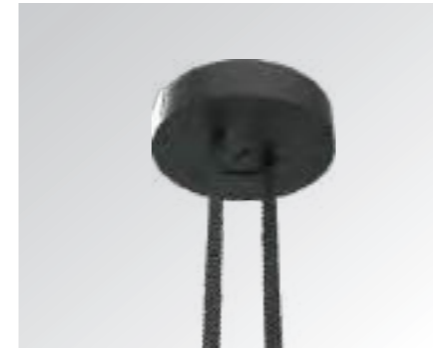

**D28-Round Power Box**

Color: Black  
Size:  $\Phi 230 \times 55$ mm



**D28-Linear Power Box**

Color: Black  
Size: 358\*60.4x45mm



**D28-Surface Terminal Box**

Color: Black  
Size:  $\Phi 80 \times 55$ mm



**D28-Recessed Terminal Box**

Color: Black  
Size:  $\Phi 85 \times 65$ mm  
Cut out:  $\Phi 75$ mm



**D28-Belt Fixed Base**

Color: Black  
Size:  $\Phi 48 \times 45$ mm



**D28-Locating Rack**

Color: Black



**D28-Suspended End Cap**

Color: Black



**D28-Suspended Buckle**

Color: Black






**D28-Electric Connector**

Color: Black

**Belt terminations**

Drak Grey ●  
Hermes Orange ●

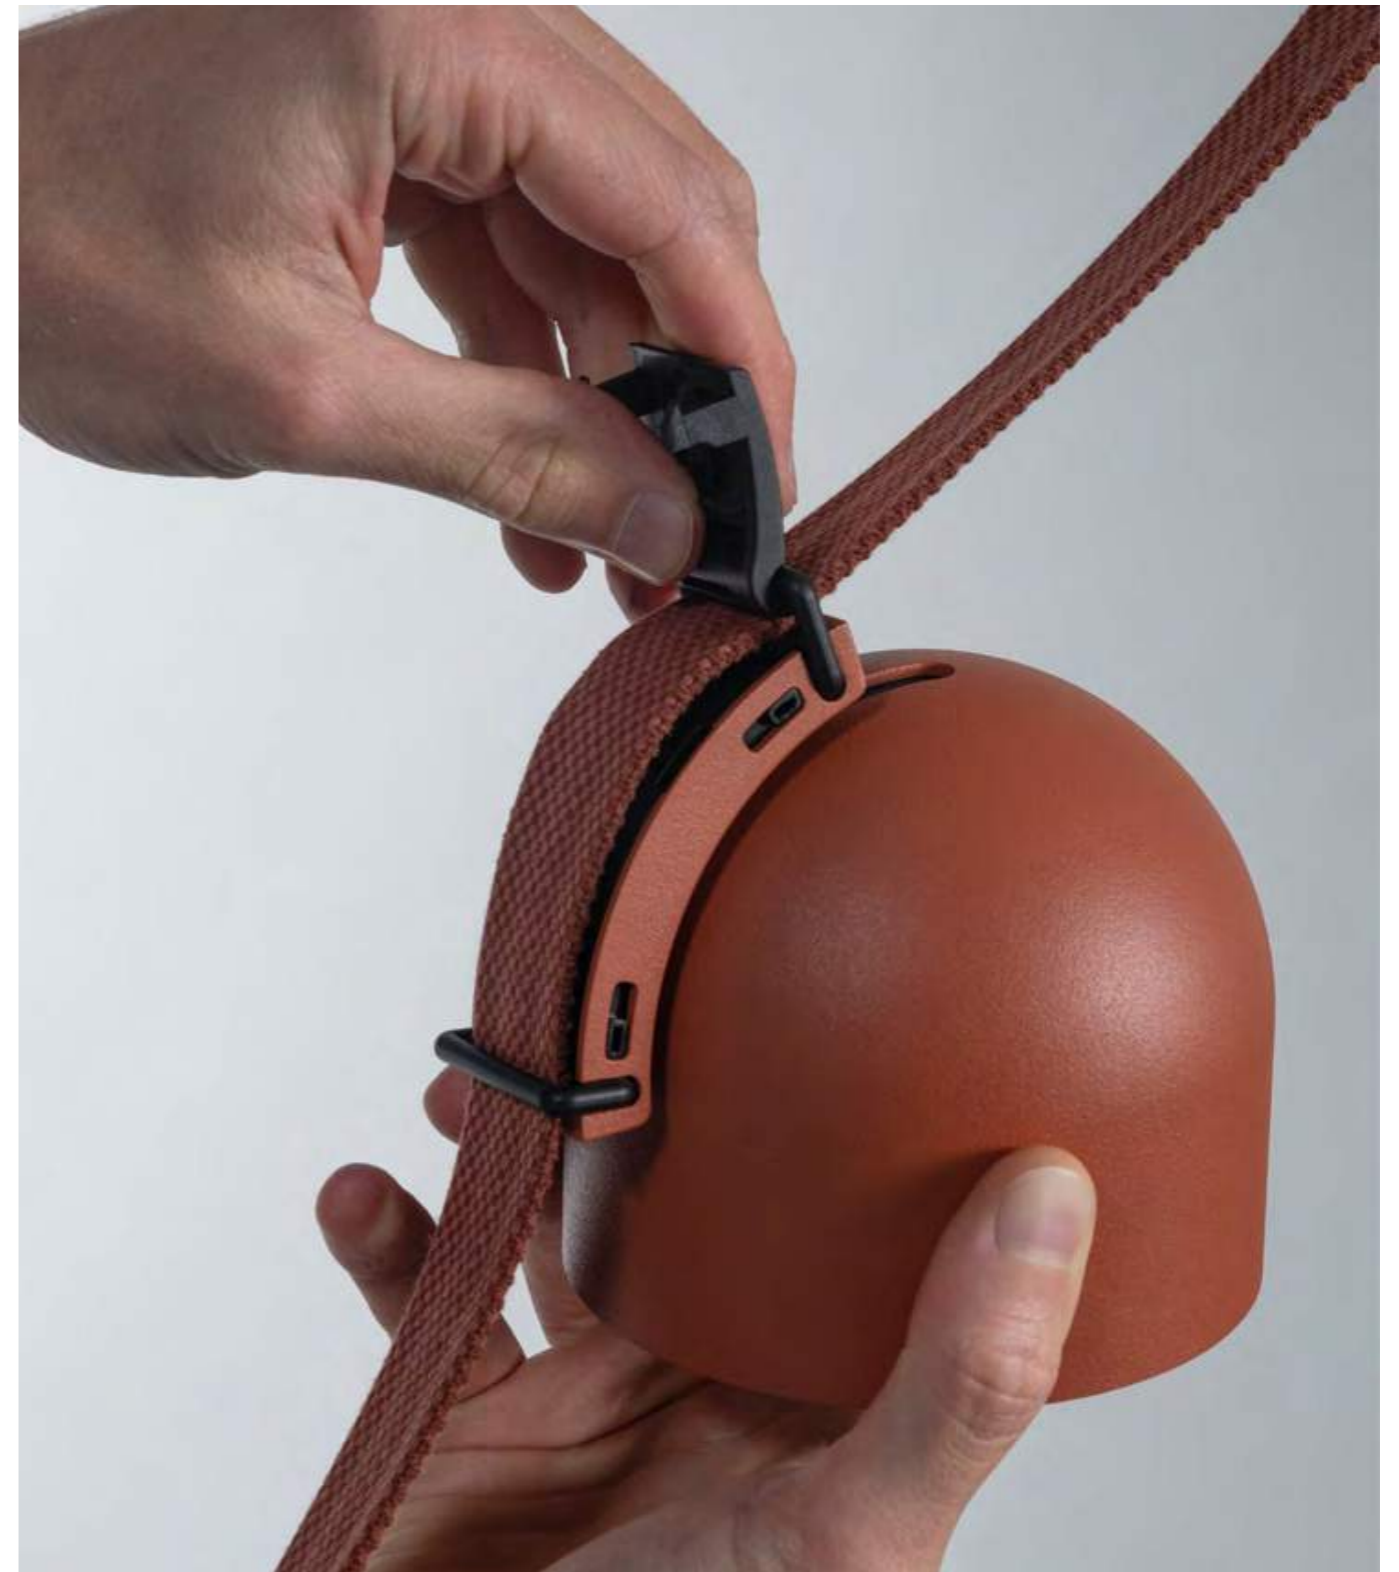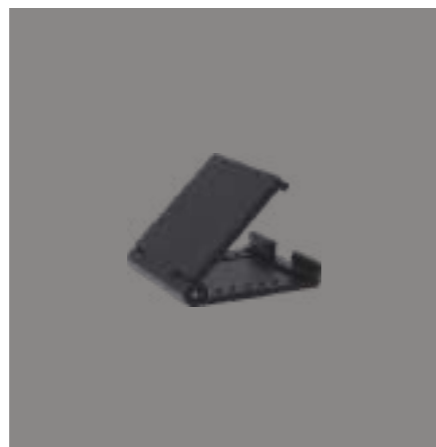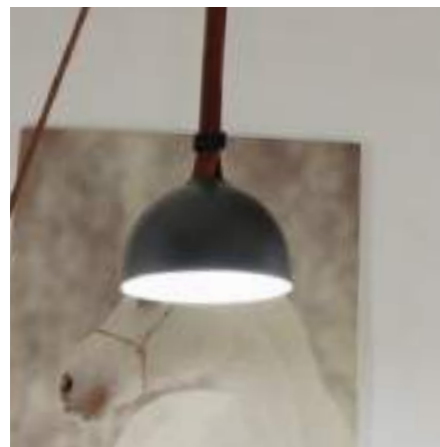



## living room plan

This is a multifunctional lighting system that adopts the concept of light rail, and the development has reached a new level. Located at its core, it allows for the free placement of lighting fixtures and the creation of unique lighting solutions on-site.



living room plan





living room plan





**Dining room plan**



**Bedroom plan**







## Creative Canopy Connection

reimagines the use of the canopy, The belt flows in and out of the canopy, establishing conductivity and electrical connection where needed, with creative configurations becoming an essential element of the design.





Other  
Space  
Displays



## Raining Light

From a single spotlight positioned close at hand to a cascading installation of luminaires over head, ceiling-to-floor possibilities create a stunning display of light in varying intensity and effect.







**Exhibition  
Lighting  
Design**






**Other Space Displays**



## 5mm Magnetic Grille Light


# 5MM MAGNETIC TRACK LIGHTING

TRACKS  
LUMINAIRES  
ACCESSORIES  
MOUNTING OPTIONS



### LD-15-82701

Wattage	5W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra≥90
Size	40x14x130mm




### LD-15-82702

Wattage	10W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra≥90
Size	40x14x240mm


## 5mm Magnetic Linear Light

CE CB RoHS   BIS



### LD-15-82801

Wattage	5W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°/36°
Color Rendering Index	Ra $\geq$ 90
Size	40x14x130mm




### LD-15-82802

Wattage	10W
INPUT	DC 48V
Lumen Flux	80LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°/36°
Color Rendering Index	Ra $\geq$ 90
Size	40x14x240mm



## 5mm Magnetic Spotlight

CE CB RoHS   BIS



### LD-15-83101

Wattage	3W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°/36°
Color Rendering Index	Ra $\geq$ 90
Size	26*H50mm

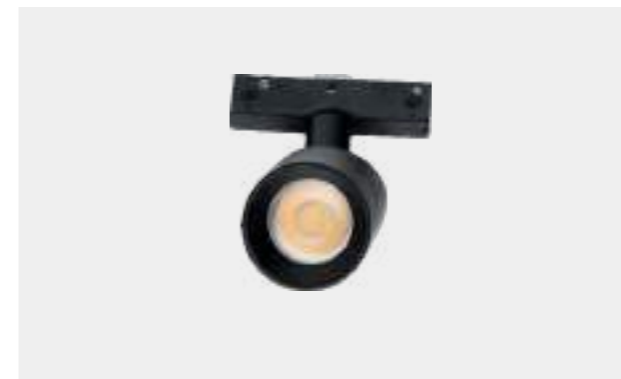


### LD-15-83102

Wattage	6W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°/36°
Color Rendering Index	Ra $\geq$ 90
Size	35*H60mm



## Magnetic Pendant Light

CE CB RoHS   BIS

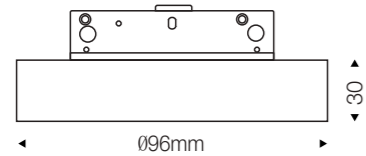


**LD-15-83201**

Wattage	10W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	110°
Color Rendering Index	Ra≥90
Size	Ø96*H30mm

## Magnetic Spotlight

CE CB RoHS   BIS


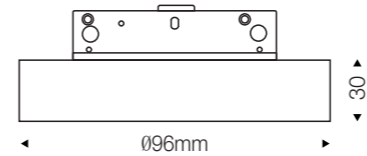


**LD-15-83201**

Wattage	10W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°/36°
Color Rendering Index	Ra≥90
Size	Ø96*H30mm

5mm Magnetic Spotlight

CE CB RoHS   BIS

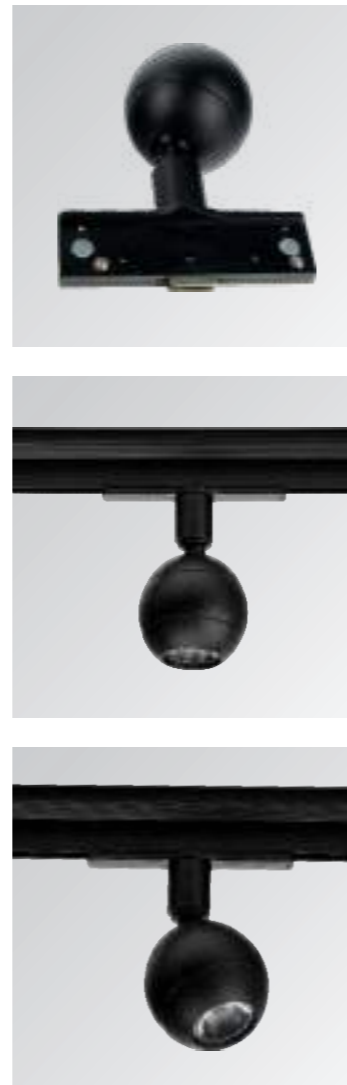


**LD-15-83501**

Wattage	3W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°/36°
Color Rendering Index	Ra≥90
Size	Ø35*H90mm

5mm Magnetic Spotlight

CE CB RoHS   BIS




**LD-15-83601**

Wattage	3W
INPUT	DC 48V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K
Beam angle	24°/36°
Color Rendering Index	Ra≥90
Size	Ø60*H90mm

**5mm Mounted Magnetic Track**

CE CB RoHS   BIS


INSTALLATION METHOD  
Embedded installation  
Concealed installation

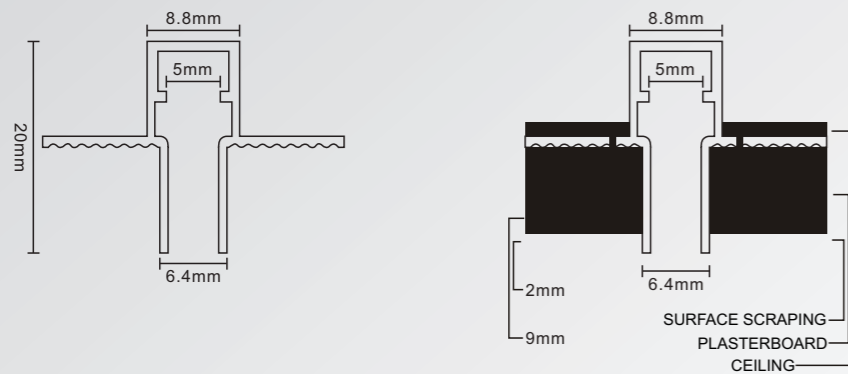




## Round Tube Magnetic Linear Light

CE CB RoHS   BIS

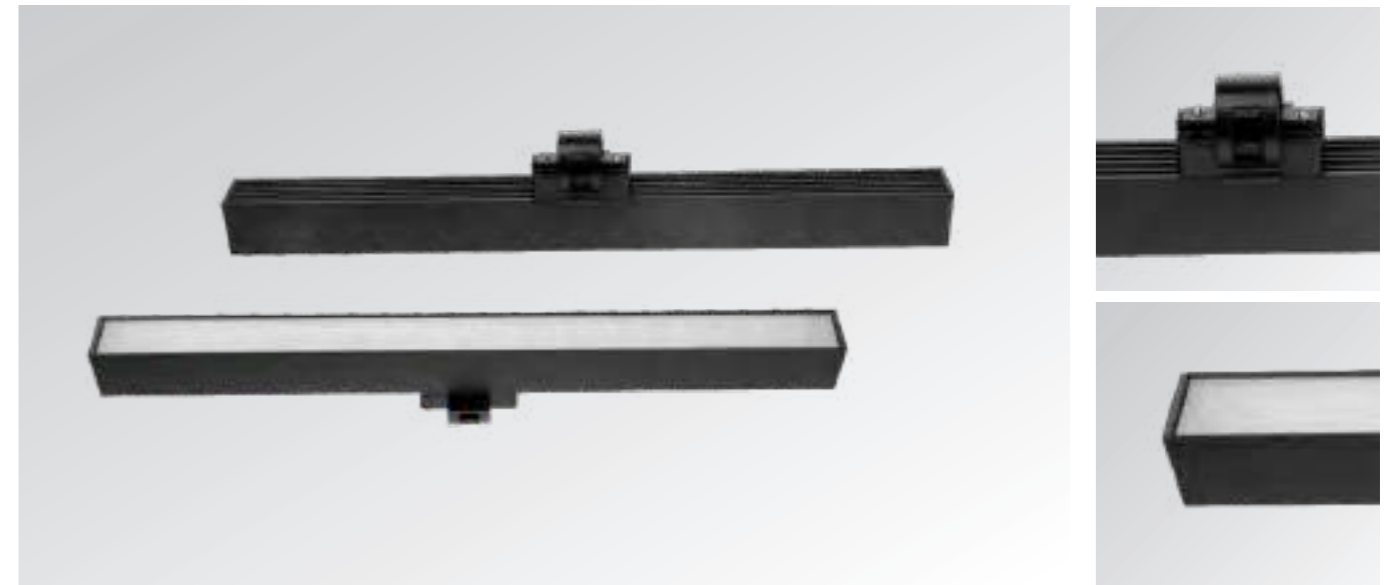


### LD-15-78001

Wattage	10W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	100°
Color Rendering Index	Ra≥80
Size	L300*W15*H21mm




### LD-15-78002

Wattage	20W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	100°
Color Rendering Index	Ra≥80
Size	L600*W15*H21mm



### LD-15-78003

Wattage	30W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	100°
Color Rendering Index	Ra≥80
Size	L900*W15*H21mm



## Round Tube Magnetic Track Light

TRACKS  
LUMINAIRES  
ACCESSORIES  
MOUNTING OPTIONS




## Round Tube Magnetic Grille Light

CE CB RoHS   BIS




### LD-15-78101

Wattage	6W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	24°/36°
Color Rendering Index	Ra≥80
Size	L118*W15*H21mm




### LD-15-78102

Wattage	12W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	24°/36°
Color Rendering Index	Ra≥80
Size	L233*W15*H21mm




### LD-15-78103

Wattage	18W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	24°/36°
Color Rendering Index	Ra≥80
Size	L348*W15*H21mm



### LD-15-78104

Wattage	24W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	24°/36°
Color Rendering Index	Ra≥80
Size	L462*W15*H21mm




## Round Tube Magnetic Spotlight

CE CB RoHS   BIS




### LD-15-78201

Wattage	7W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	100°
Color Rendering Index	Ra≥90
Size	Φ60mm



**Round Tube Magnetic Spotlight**

CE CB RoHS BIS

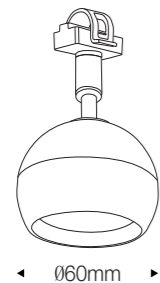


**LD-15-78301**

Wattage	7W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	24°/36°
Color Rendering Index	Ra≥80
Size	Φ 60mm


**Round Tube Magnetic Spotlight**

CE CB RoHS BIS




**LD-15-78401**

Wattage	3W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	15°/24°/36°
Color Rendering Index	Ra≥80
Size	Φ 40*L90mm



**LD-15-78402**

Wattage	7W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	15°/24°/36°
Color Rendering Index	Ra≥80
Size	Φ 40*L120mm



**LD-15-78403**

Wattage	10W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	15°/24°/36°
Color Rendering Index	Ra≥80
Size	Φ 50*L120mm




## Round Tube Magnetic Pendant Light

CE CB RoHS   BIS




**LD-15-78501**

Wattage	6W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	24°/36°
Color Rendering Index	Ra≥80
Size	L113*W17*H86mm



**LD-15-78502**

Wattage	12W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	24°/36°
Color Rendering Index	Ra≥80
Size	L223*W17*H86mm




## Round Tube Magnetic Spotlight

CE CB RoHS   BIS




**LD-15-78601**

Wattage	3W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	24°
Color Rendering Index	Ra≥90
Size	φ 25*L300mm



**LD-15-78602**

Wattage	10W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	20°/40°
Color Rendering Index	Ra≥90
Size	φ 40*L300mm



**Round Tube Magnetic Track**

CE CB RoHS   BIS

Tube with upside light



**LD-15-78701**

Wattage	5W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	100°
Color Rendering Index	Ra≥80
Size	φ 12*L500mm



**LD-15-78702**

Wattage	10W
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	100°
Color Rendering Index	Ra≥80
Size	φ 12*L1000mm



**Round Tube Magnetic Track**

CE CB RoHS   BIS

Tube with upside light+downside rail



**LD-15-78801**

Wattage	5W+
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	100°
Color Rendering Index	Ra≥80
Size	φ 12*L500mm



**LD-15-78802**

Wattage	10W+
INPUT	DC 24V
Lumen Flux	30LM/W
Housing Color	Black
CCT	3000K/4000K/5700K
Beam angle	100°
Color Rendering Index	Ra≥80
Size	φ 12*L1000mm



**Round Tube Magnetic Power**

CE CB RoHS BIS



24V DC Power Supply	
Wattage	100W
INPUT	DC 24V
Housing Color	Black
Size	15*250mm



24V DC Power Supply	
Wattage	200W
INPUT	DC 24V
Housing Color	Black
Size	15*250mm

**Round Tube Magnetic Accessories**

CE CB RoHS BIS



Input connector	
INPUT	DC 24V
Size	φ 35*H40mm



Fixed accessories	
INPUT	DC 24V
Size	φ 35*H40mm



Universal joint	
INPUT	DC 24V
Size	φ 35*H40mm



L shape connector joint-Wall to Ceiling	
INPUT	DC 24V
Size	φ 35*H40mm



Input connector front joint	
INPUT	DC 24V
Size	φ 35*H40mm



Input connector end joint	
INPUT	DC 24V
Size	φ 35*H40mm



L shape connector joint-Left	
INPUT	DC 24V
Size	φ 35*H40mm



L shape connector joint-Right	
INPUT	DC 24V
Size	φ 35*H40mm



I shape connector joint	
INPUT	DC 24V
Size	φ 35*H40mm



T shape connector joint	
INPUT	DC 24V
Size	φ 35*H40mm



X shape connector joint	
INPUT	DC 24V
Size	φ 35*H40mm



Fixed buckle	
INPUT	DC 24V
Size	φ 22*H22mm