


04/25 NEW
PRODUCTS

SKD HOUSING

- Quality in focus

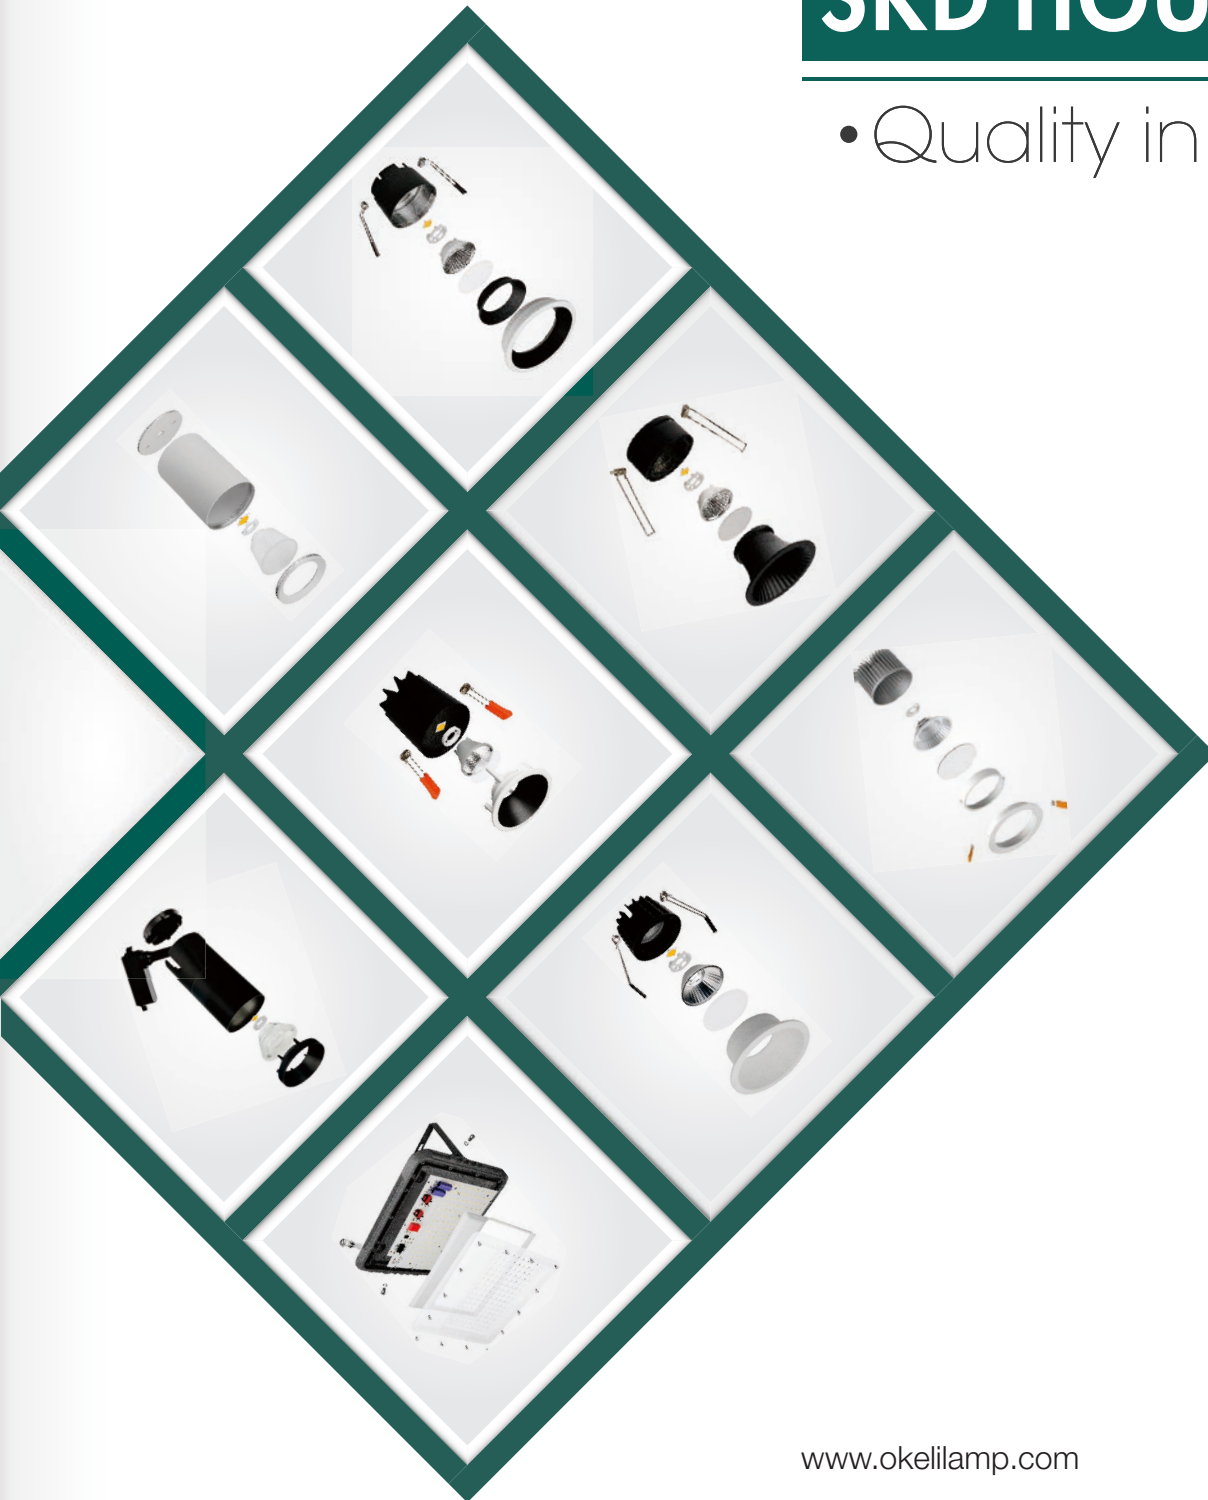

PRODUCT INDEX

1 COB Downlights



NB-787-A PAGE 05




NB-787-B PAGE 06



NB-787-C PAGE 06



NB-787-D PAGE 06



NB-787-E PAGE 07



NB-787-F PAGE 08



NB-2110 PAGE 09



NB-2119-A PAGE 10



NB-2119-B PAGE 11



NB-3237 PAGE 12



NB213 PAGE 13



NB3236 PAGE 14



LD-03-796 PAGE 15



LD-03-972 PAGE 16



LD-12-993 PAGE 17



LD-10-983 PAGE 18



LD-14-973 PAGE 19



LD-03-719 PAGE 20

PRODUCT INDEX

1 COB Downlights



LD-03-974 PAGE 21



LD-03-975 PAGE 22



LD-03-987/LD-03-988 PAGE 23



LD-10-705 PAGE 24

2 Surface Lights



LD-11-802 PAGE 25



NB-392 PAGE 26



NB-3228-A PAGE 27



NB-3228-B PAGE 28



NB-306 PAGE 29

3 Track Lights



NB-1112 PAGE 30

PRODUCT INDEX

4 LED FLOODLIGHT



UT-50-051 PAGE 31



UT-50-052 PAGE 32



UT-50-042 PAGE 33



UT-50-054 PAGE 34



UT-50-056 PAGE 35





SKD-HOUSING

CE CB BIS

NB-787-A

Wattage: 10W/15W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Beam angle: 18°/24°/36°
 Housing Color : WHITE(WH) BLACK(BK)
 Front ring:

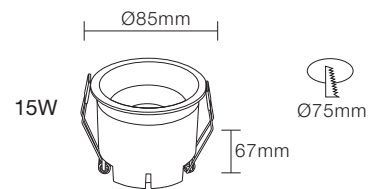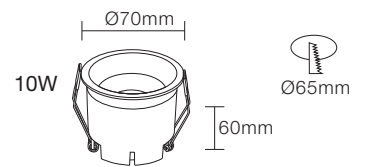

CE CB BIS



NB-787-B

CE CB BIS



Wattage: 10W/15W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Beam angle: 18°/24°/36°
 Housing Color: WHITE(WH) BLACK(BK)
 Front ring :




NB-787-C

CE CB BIS



Wattage: 10W/15W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Beam angle: 40°
 Housing Color: WHITE(WH) BLACK(BK)
 Front ring :

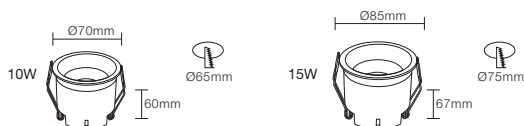


NB-787-D

CE CB BIS




Wattage: 10W/15W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Beam angle: 36°
 Housing Color: WHITE(WH) BLACK(BK)
 Front ring :

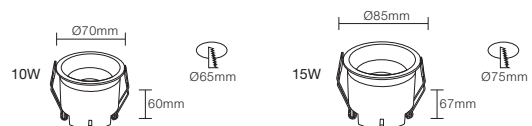




CE CB BIS





NB-787-E

Wattage:	10W/15W
Lumens:	80LM/W
Chip:	COB
CCT:	3000K/4000K/6000K(Single color)
Input Power:	AC165-265V Isolated driver
Material:	Die casting Aluminum
Beam angle:	55°
Housing Color:	<input type="checkbox"/> WHITE(WH) <input checked="" type="checkbox"/> BLACK(BK)

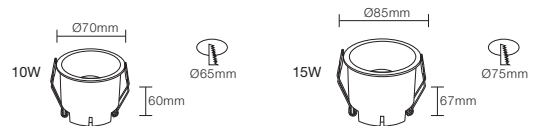

CE CB BIS

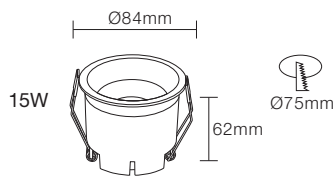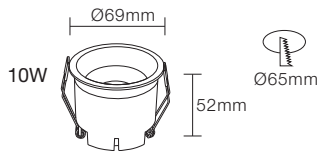



NB-787-F

Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6500K
 Input Power: AC160-265V Isolated driver
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) BLACK(BK)

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
NB-787-F-10W	10W	Ø69*52	Ø60	24°
NB-787-F-15W	15W	Ø84*62	Ø75	24°




CE CB BIS



NB-2110

- Wattage: 7W/12W
- Lumens: 80LM/W
- Chip: COB
- CCT: 3000K/4000K/6000K(Single color)
- Input Power: AC165-265V Isolated driver
- Material: Die casting Aluminum
- Beam angle: 18°/24°/36°
- Housing Color : WHITE(WH) BLACK(BK)
- Front ring:

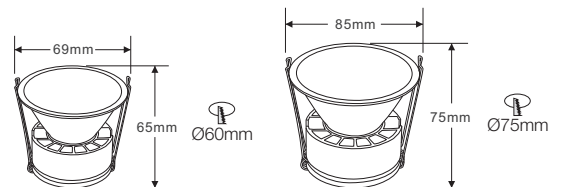



SKD-HOUSING



NB-2119-A

Wattage: 5W/10W/15W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6500K
 Input Power: AC160-265V Isolated driver
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) BLACK(BK)

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
NB-2119-5W-A	5W	Ø70*H40	Ø60	24°/36°/60°
NB-2119-10W-A	10W	Ø85*H45	Ø75	24°/36°/60°
NB-2119-15W-A	15W	Ø95*H50	Ø90	24°

CE CB BIS





SKD-HOUSING



NB-2119-B

Wattage: 5W/10W/15W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6500K
 Input Power: AC160-265V Isolated driver
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) BLACK(BK)

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
NB-2119-5W-B	5W	Ø70*H40	Ø60	24°/36°/60°
NB-2119-10W-B	10W	Ø85*H45	Ø75	24°/36°/60°
NB-2119-15W-B	15W	Ø95*H50	Ø90	24°

CE CB BIS







CE CB BIS





NB-3237-A/NB-3237-B

Lumens: 75LM/W
 Chip: COB
 CCT: 3000K/4000K/6500K
 Input Power: AC160-265V Isolated driver
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) BLACK(BK)

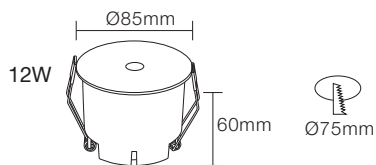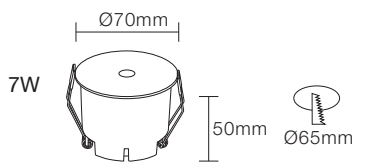

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
NB-3237-7W-A	7W	Ø70*50	Ø65	24°/36°
NB-3237-12W-A	12W	Ø85*60	Ø75	24°/36°
NB-3237-7W-B	7W	Ø70*50	Ø65	24°/36°
NB-3237-12W-B	12W	Ø85*60	Ø75	24°/36°

CE CB BIS

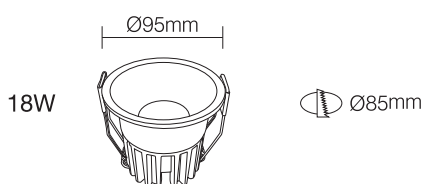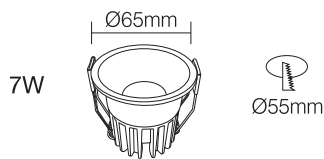




NB-213

Wattage: 5W/10W/15W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6500K
 Input Power: AC160-265V Isolated driver
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) BLACK(BK)

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
NB213-7W	7W	Ø65	Ø55	24°/36°
NB213-12W	12W	Ø85	Ø75	24°/36°
NB213-18W	18W	Ø95	Ø85	24°/36°



CE CB BIS

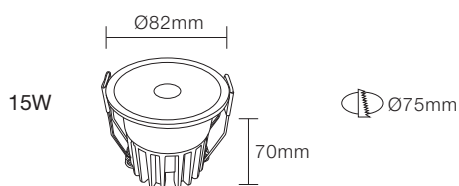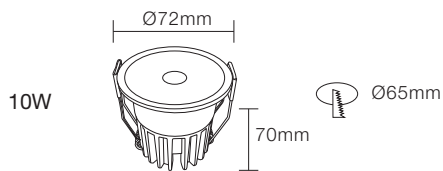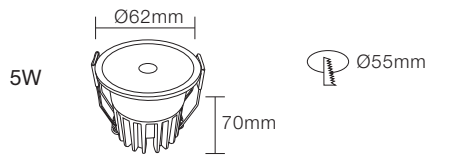

NB-3236

CCT: 3000K/4000K/6500K
 Input Power: AC160-265V Isolated driver
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) BLACK(BK)

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
NB-3236-7W	5W	Ø62*H70	Ø55	24°/36°
NB-3236-10W	10W	Ø72*H70	Ø65	24°/36°
NB-3236-12W	15W	Ø82*H70	Ø75	24°/36°




SKD-HOUSING

LD-03-796



Wattage: 7W/12W/18W
 Lumens: 40LM/W
 Chip: SMD
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Beam angle: 110°
 Housing Color: WHITE(WH) BLACK(BK)

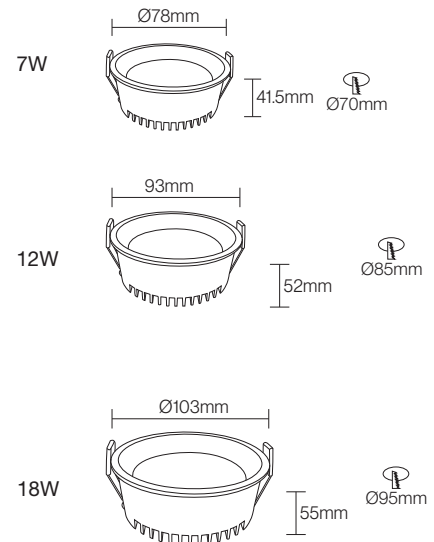


CE CB BIS





SKD-HOUSING

LD-03-972

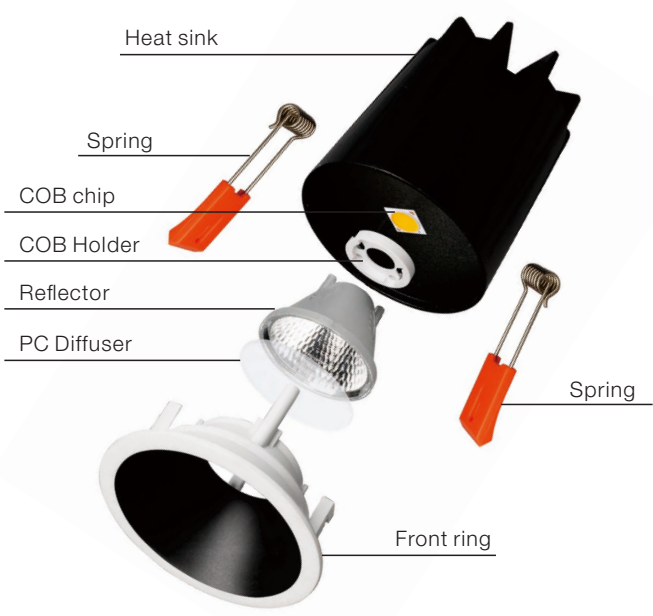

Wattage: 5W/10W/15W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6500K
 Input Power: AC160-265V Isolated driver
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) BLACK(BK)

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
LD-03-97201	5W	Ø56*70	Ø50	12°/24°/36°/45°
LD-03-97202	7W	Ø67*71	Ø55	12°/24°/36°/45°
LD-03-97203	12W	Ø74*86	Ø65	12°/24°/36°/45°
LD-03-97204	15W	Ø80*90	Ø70	12°/24°/36°/45°




CE CB BIS





LD-12-993

Chip: COB
 CCT: 3000K/4000K/6500K
 Input Power: AC160-265V Isolated driver
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) BLACK(BK)

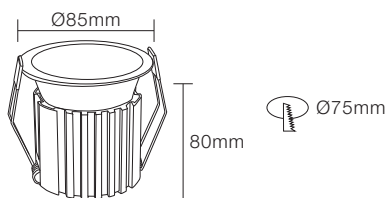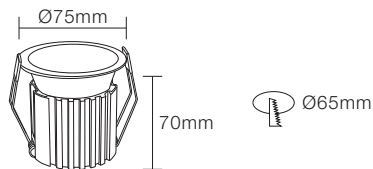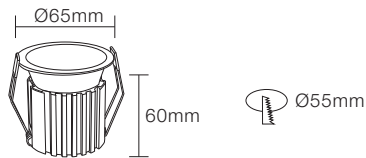

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
LD-12-99301	7W	Ø65*H60	Ø55	12°/24°/36°/45°
LD-12-99302	12W	Ø75*H70	Ø65	12°/24°/36°/45°
LD-12-99303	15W	Ø85*H80	Ø75	12°/24°/36°/45°

CE CB BIS





Inner ring color:



Glossy Black Glossy White Matte Black Matte White Rose Glod GunBlack Matte Silver Silver

LD-10-983

Name	Power	Size(mm)	Cut out(mm)	Optics	Housing Color	Front ring Color
LD-10-98301	7W	Ø65*H60	Ø60	19°/24°/36°	White/Black	Glossy Black/ Glossy White/ Matte Black/ Matte White/ Rose Glod/ Gun Black/ Matte Silver/ Silver
LD-10-98302	12W	Ø80*H72	Ø75			
LD-10-98303	18W	Ø90*H90	Ø85			

CE CB BIS




LD-14-973

Name	Power	Size(mm)	Cut out(mm)	Optics	Housing Color	Front ring Color
LD-14-97301	5W	94*50*H47	80*45	15°/24°/36°	White+Black	Black
LD-14-97302	10W	151*50*H47mm	135*45			
LD-14-97303	18W	263*50*H47mm	250*45			


LD-03-719




7W

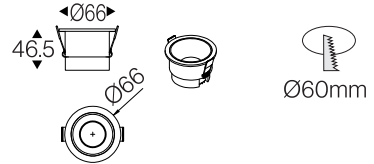

12W

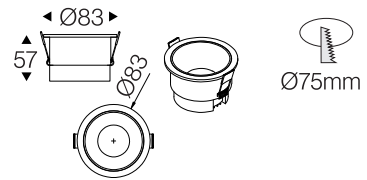

18W

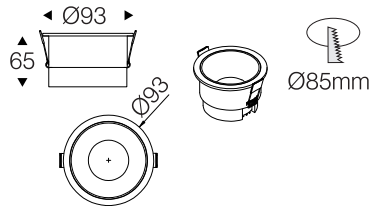

Name	Power	Size (mm)	Cut out (mm)	Beam Angle
LD-03-71901	7W	Ø66*H46.5	Ø60	45°
LD-03-71902	12W	Ø83*H57	Ø75	45°
LD-03-71903	18W	Ø96*H65	Ø85	45°

CE CB BIS






CE CB BIS

LD-03-974

Chip: COB
 CCT: 3000K/4000K
 Input Power: 220-265V
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) SLIVER(SL)

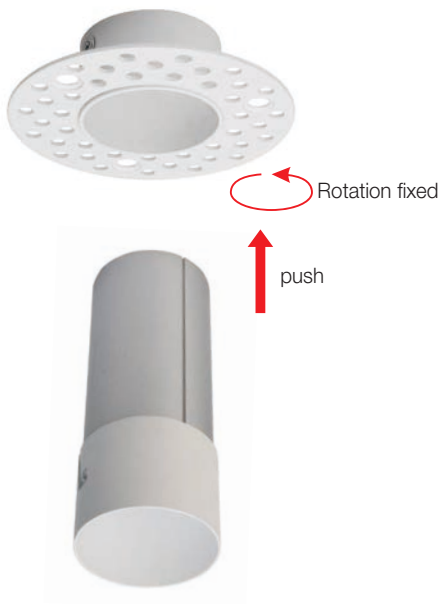


Name	Power	Size (mm)	Cut out (mm)	Beam Angle
LD-03-97401	3W	Ø52.5*98	Ø25	24°/36°
LD-03-97402	7W	Ø64.5*97	Ø35	24°/36°
LD-03-97403	10W	Ø78.5*150	Ø45	24°/36°



CE CB BIS

LD-03-975

Chip: COB
 CCT: 3000K/4000K
 Input Power: 220-265V
 Material: Die casting Aluminum
 Housing Color: WHITE(WH) SLIVER(SL)

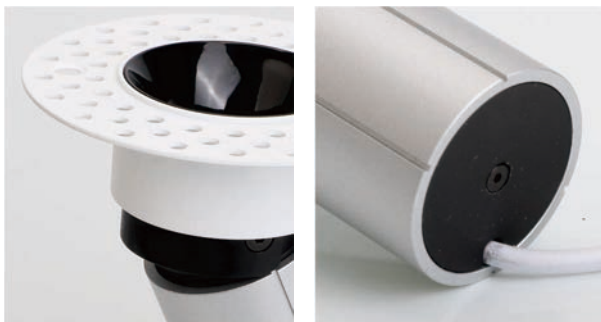


Name	Power	Size (mm)	Cut out (mm)	Beam Angle
LD-03-97501	3W	Ø52.5*103	Ø25	24°/36°
LD-03-97502	7W	Ø64.5*97	Ø35	24°/36°
LD-03-97503	10W	Ø78.5*153	Ø45	24°/36°




LD-03-987 / LD-03-988

Name	Power	Size(mm)	Cut out(mm)	Optics	Housing Color	Front ring Color
LD-03-98701	3W	ø25*100	ø20	24°/36°	White+Sliver	Black
LD-03-98702	7W	ø35*94	ø30			
LD-03-98703	10W	ø45*151	ø40			
LD-03-98801	3W	ø30*100	ø25			
LD-03-98802	7W	ø40*94	ø35			
LD-03-98803	10W	ø50*153	ø45			




LD-10-705

Wattage: 3W/7W/12W/18W/24W/30W/50W
Lumens: 80LM/W
Chip: COB
CCT: 3000K/4000K/6000K(Single color)
Input Power: AC165-265V Isolated driver
Material: Die casting Aluminum
Beam angle: 18°/24°/36°
Housing Color: WHITE(WH) GREY(GR)

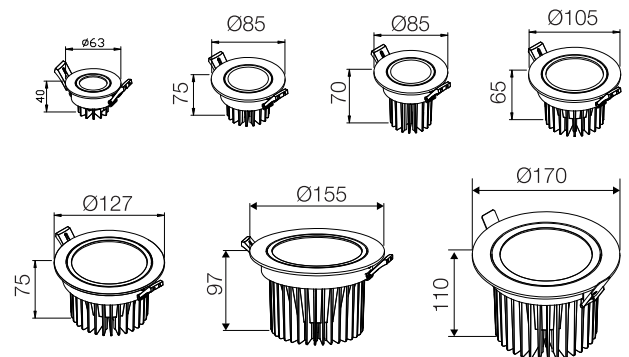




SKD-HOUSING

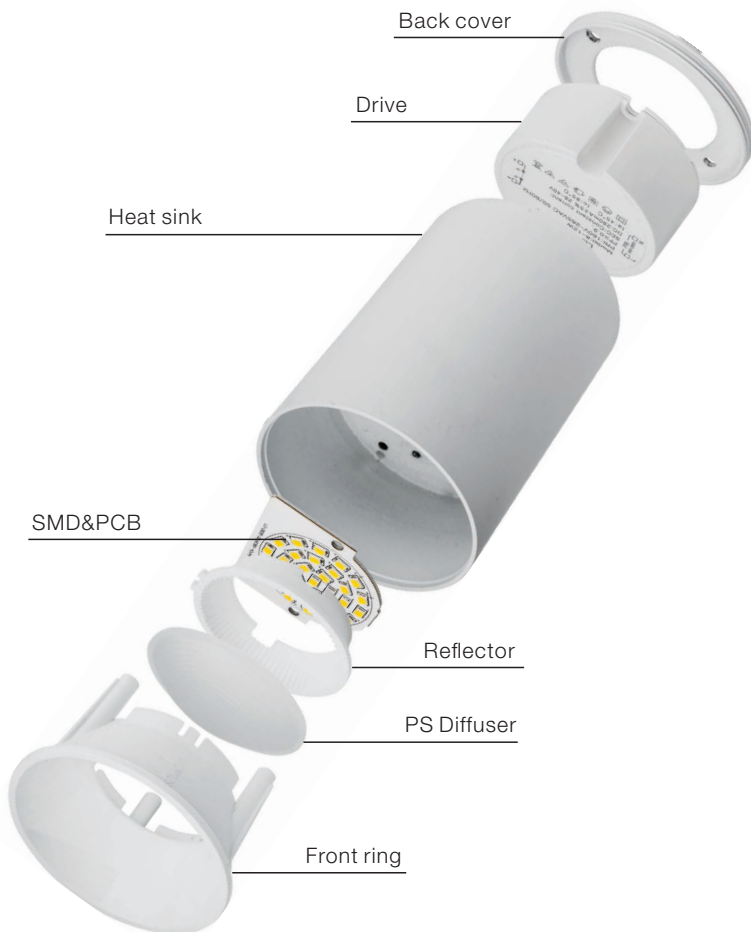


LD-11-802

- Wattage: 7W/12W/18W
- Lumens: 50LM/W
- Chip: SMD 2835
- CCT: 3000K/4000K/6000K(Single color)
- Input Power: AC220-265V Isolated driver
- Material: Die casting Aluminum
- Beam angle: 45-50°
- Housing Color: BLACK(BK) WHITE(WH)

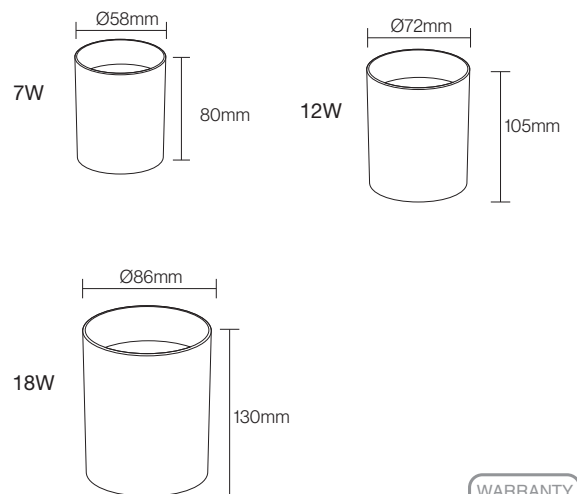


CE CB BIS



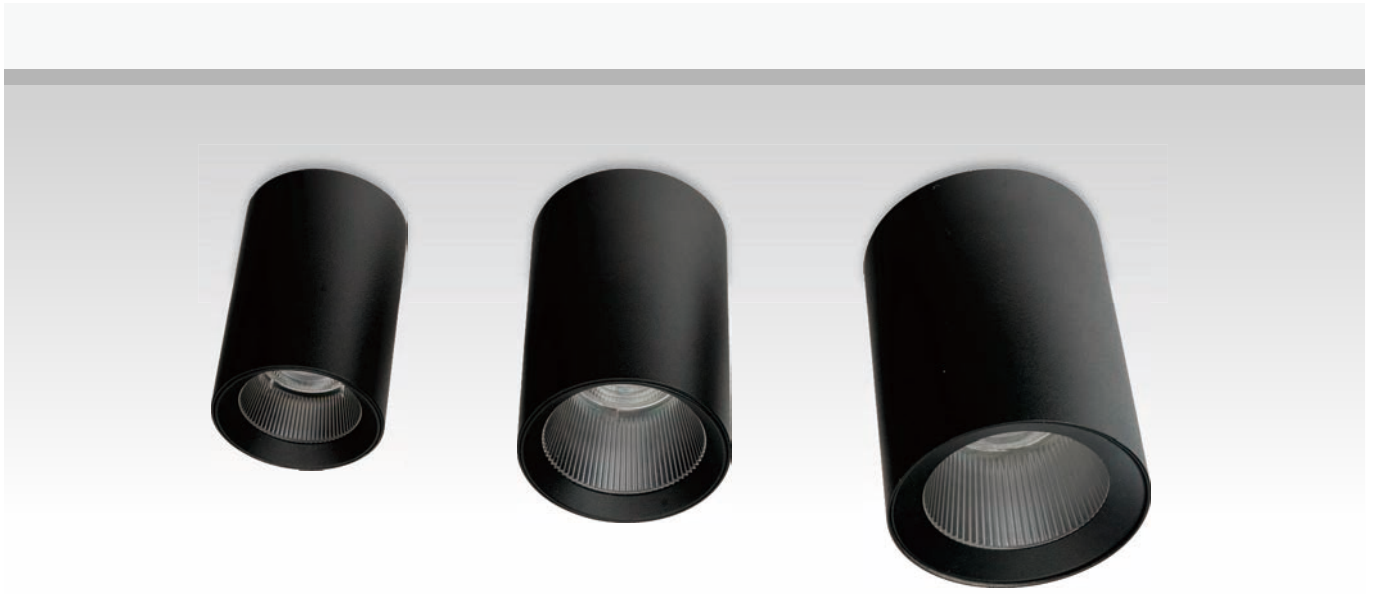

SKD-HOUSING

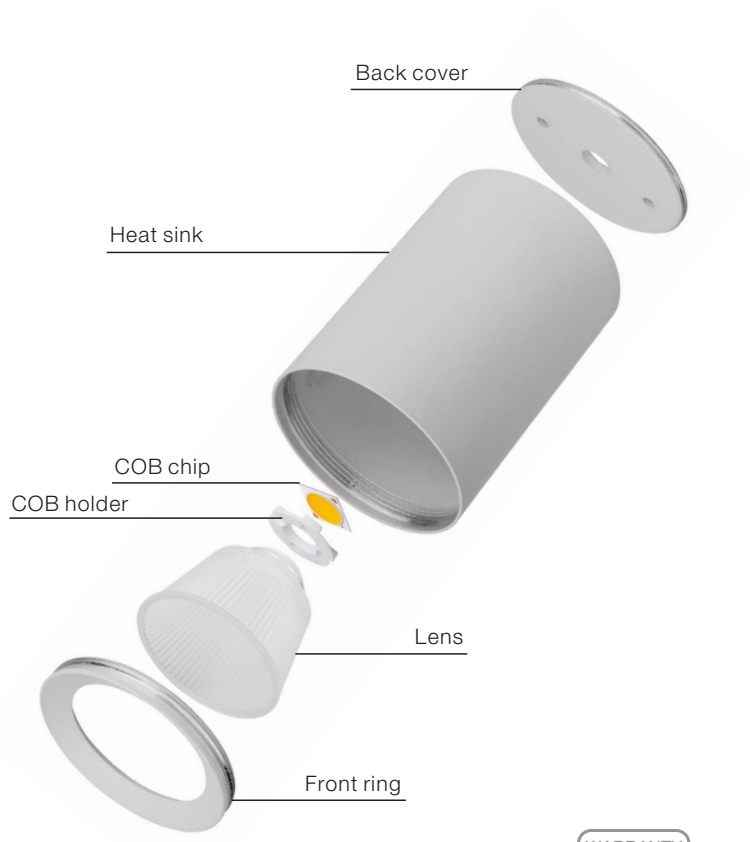


CE CB BIS



NB-392


Wattage: 5W/7W/10W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K(Single color)
 Input Power: AC165-265V Isolated driver
 Material: Aluminum+Acrylic
 Beam angle: 36°
 Housing Color: ■ BLACK(BK) □ WHITE(WH)

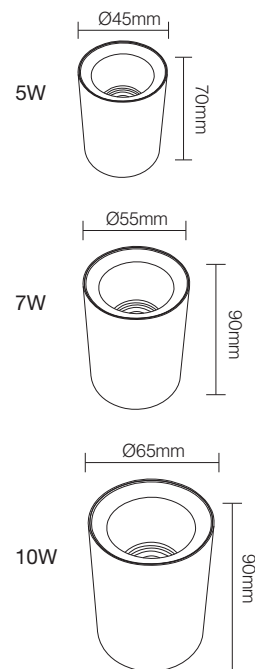





CE CB BIS

NB-3228-A

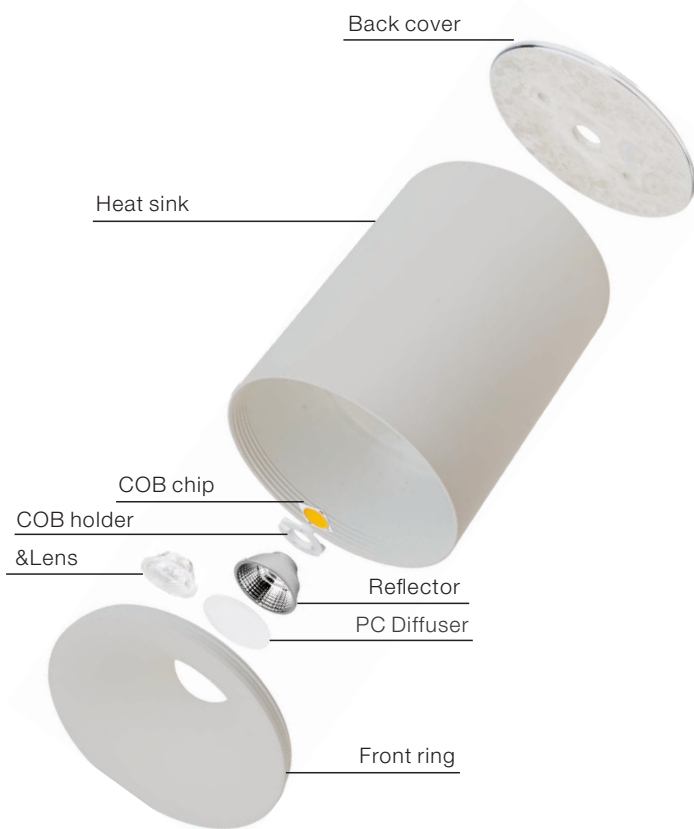

Wattage: 7W/12W
Lumens: 80LM/W
Chip: COB
CCT: 3000K/4000K/6000K(Single color)
Input Power: AC170-265V Isolated driver
Material: Die casting Aluminum
Beam angle: 36°
Housing Color: ■ BLACK(BK) □ WHITE(WH)

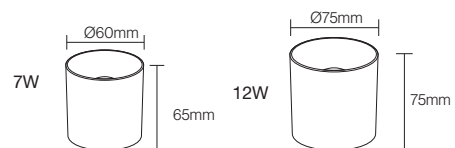

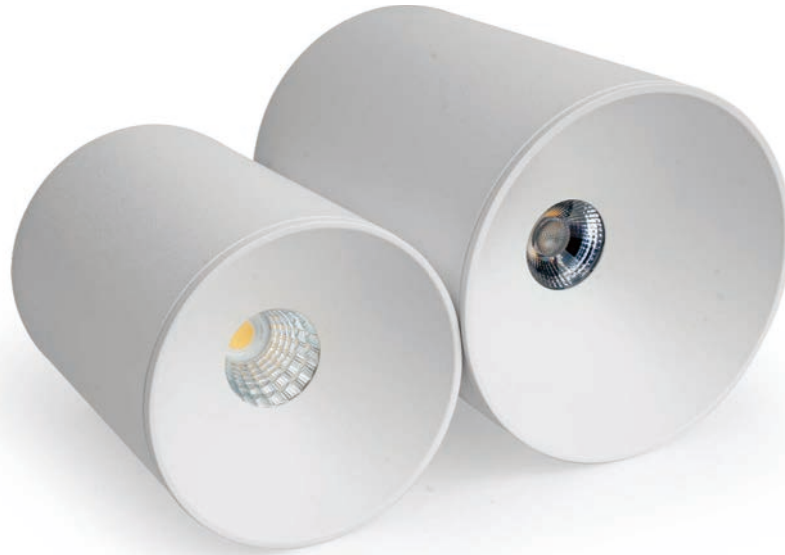


CE CB BIS

NB-3228-B



Wattage: 7W/12W
Lumens: 80LM/W
Chip: COB
CCT: 3000K/4000K/6000K(Single color)
Input Power: AC170-265V Isolated driver
Material: Die casting Aluminum
Beam angle: 36°
Housing Color: ■ BLACK(BK) □ WHITE(WH)


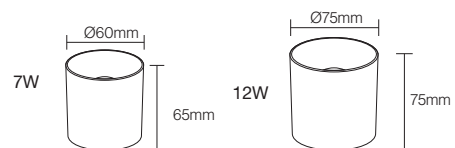




CE CB BIS

NB-306

Wattage: 7W/12W
Lumens: 80LM/W
Chip: COB
CCT: 3000K/4000K/6000K(Single color)
Input Power: AC170-265V Isolated driver
Material: Die casting Aluminum
Beam angle: 36°
Housing Color: ■ BLACK(BK) □ WHITE(WH)






SKD-HOUSING

NB-1112

Wattage: 10W/20W/30W/36W/45W
 Lumens: 80LM/W
 Chip: COB
 CCT: 3000K/4000K/6000K/3 IN 1
 Input Power: AC165-265V Isolated driver
 Material: Die casting Aluminum
 Beam angle: 24°
 Housing Color: BLACK(BK) WHITE(WH)

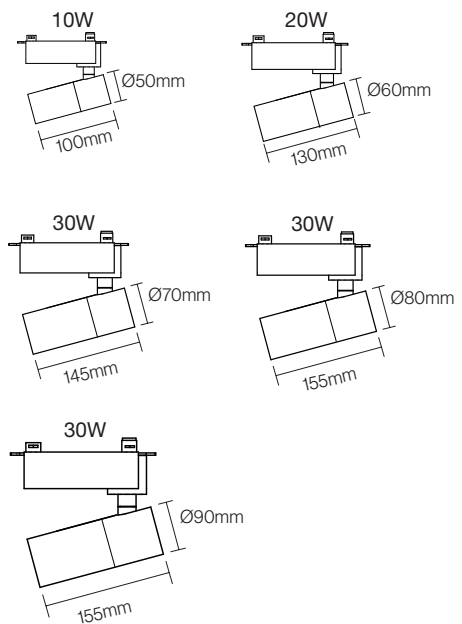

CE CB BIS





UT-50-051


Name	Power	Size(mm)	Material	Chip	CCT	Lumen	IP	Input voltage
UT-50-05101	30W	160*138*28mm	Die-cast aluminum +PC	2835	6500K	110LM/W	65	AC160-440V
UT-50-05102	50W	186*168*29mm						
UT-50-05103	100W	238*204*31mm						
UT-50-05104	150W	273*236*31mm						
UT-50-05105	200W	298*254*31mm						
UT-50-05106	300W	346*290*42mm						





UT-50-052

Name	Power	Size(mm)	Material	Chip	CCT	Lumen	IP	Input voltage
UT-50-05201	30W	167*130*27.5mm	Die-cast aluminum +PC	2835	6500K	110LM/W	65	AC160-440V
UT-50-05202	50W	220*180*27.5mm						
UT-50-05203	100W	290*220*28mm						
UT-50-05204	150W	315*245*28mm						
UT-50-05205	200W	330*275*28mm						
UT-50-05206	300W	510*350*29mm						

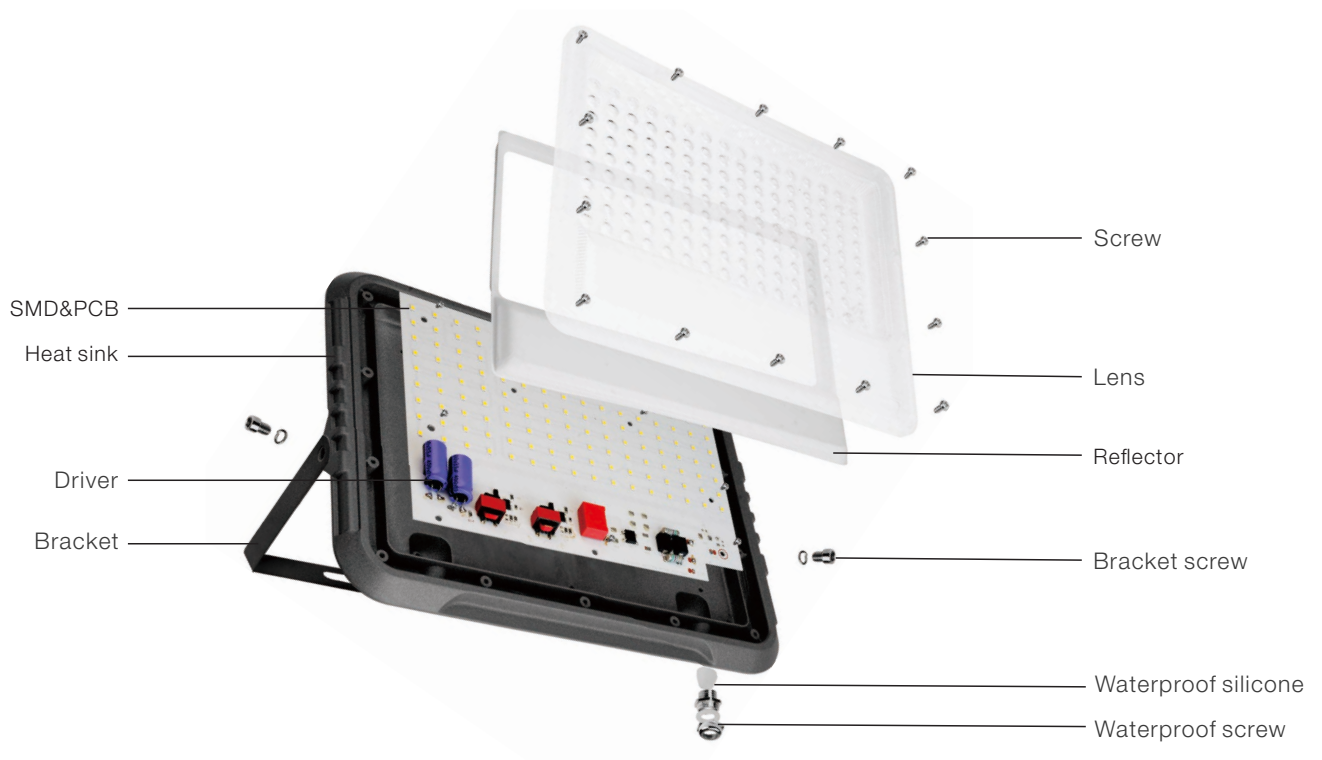




UT-50-042

Name	Power	Size(mm)	Material	Chip	CCT	Lunmen	IP	Input voltage
UT-50-04201	50W	205*35*217mm	Die-cast aluminum +PC	2835	6000K	100LM/W	65	AC110-260V
UT-50-04202	100W	270*39*273mm						
UT-50-04203	200W	353*48*353mm						
UT-50-04204	300W	423*50*433mm						
UT-50-04205	400W	523*55*537mm						



UT-50-054


Name	Power	Size(mm)	Material	Chip	CCT	Lumen	IP	Input voltage
UT-50-05401	30W	150*125*25MM	Die-cast aluminum +PC	2835	6500K	110LM/W	65	AC85-265V
UT-50-05402	50W	205*160*25MM						
UT-50-05403	100W	270*210*25MM						
UT-50-05404	150W	330*250*25MM						
UT-50-05405	200W	380*280*25MM						
UT-50-05406	300W	426*316*25MM						
UT-50-05407	400W	470*360*30MM						

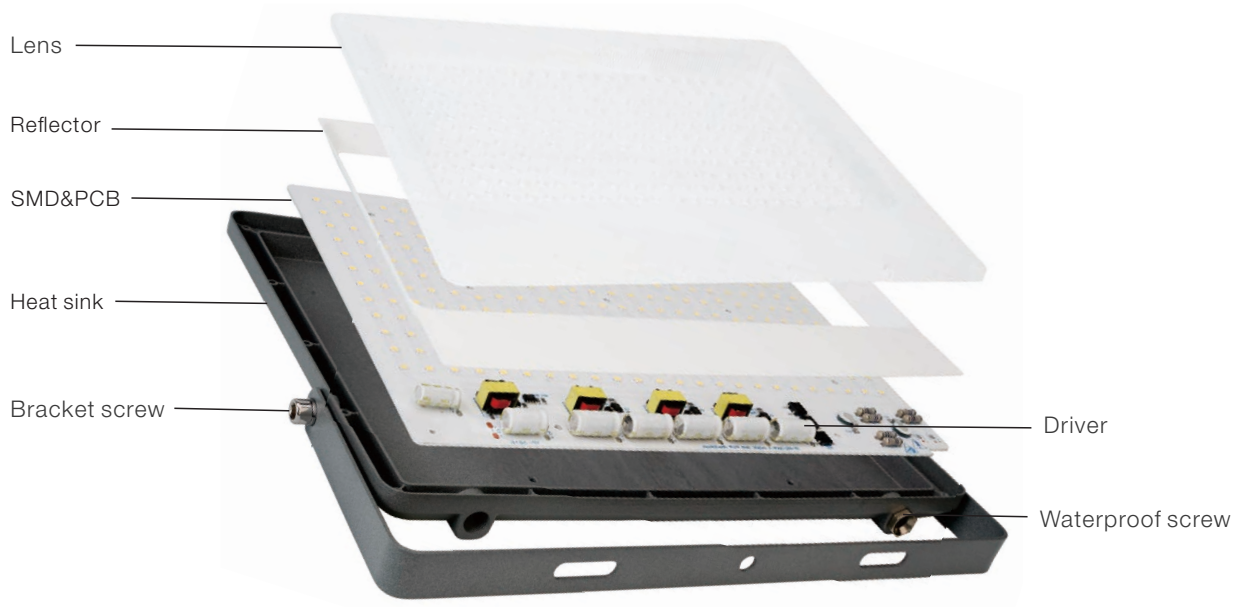



UT-50-056

Name	Power	Size(mm)	Material	Chip	CCT	Lumen	IP	Input voltage
UT-50-05601	30W	160*139*25mm	Die-cast aluminum +PC	2835	6500K	110LM/W	65	AC100-265V
UT-50-05602	50W	180*165*25mm						
UT-50-05603	100W	238*217*25mm						
UT-50-05604	150W	296*270*25mm						
UT-50-05605	200W	335*305*25mm						
UT-50-05606	300W	378*345*30mm						
UT-50-05607	400W	425*388*31mm						

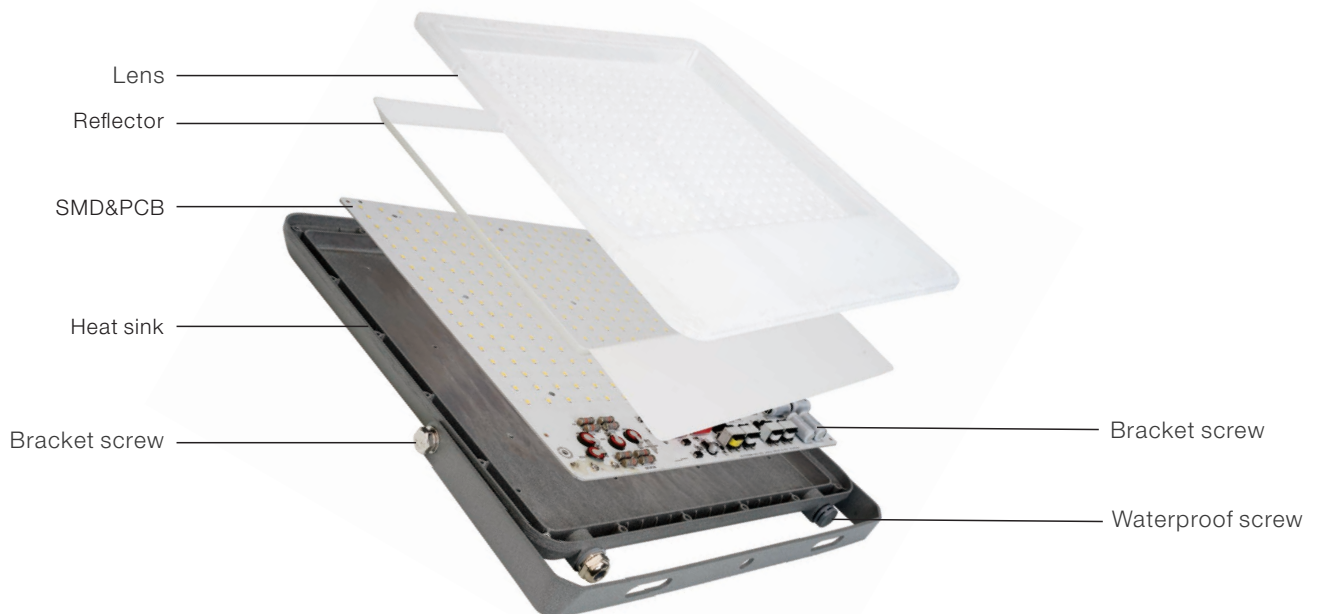

SKD-HOUSING

中山市奥克莱灯饰有限公司
OKELI LIGHTING CO.,LTD

 Factory Address

**No.36 ChangAn North Road,Henglan Town,
Zhongshan City,Guangdong,China**

 Website

www.okelilamp.com

 Mailbox

sale12@neworb.cn

 Service Hotline

+86 19129099652



WhatsApp



WeChat